



LED Mini Wall Pack

Date:..... Location:

Product:..... Project:.....

Quantity:..... Catalog#



FEATURES

- Rectangle Slim design with less obtrusive appearance on the building while still fully
- Built-in universal Photocell.
- Die-casting Aluminum housing, Plastic lense.
- 0-10V dimming.
- 50000hrs life time.

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with bronze powder-coated finish.

ELECTRICAL:

Available as 120-277V input. -20°C to 45°C,

OPTICAL SYSTEM:

High brightness lumileds 2835 chips. high transmittance rate plastic optics.120° beam angle.

INSTALLATION&MOUNTING:

Wall mounting with backside plate for easy install.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

CONTROLS&DIMMING

Built-in Photocell options,0-10v dimmable

PERFORMANCE

| Model NO | PFC | Wattage Tunable | Voltage/Current Input | | Light Efficiency | Kelvin Tunable |
|------------------|------|-----------------|-----------------------|-------|------------------|-------------------|
| | | | 120V | 277V | | |
| ML-WPA-26W-50K-P | >0.9 | 26W | 0.21A | 0.09A | 138LM/W | 3000K/4000K/5000K |

Electric Characteristic

| Specification/Model | ML-WPA-26W-50K-P |
|-------------------------|------------------|
| LED Driver | KH UL Driver |
| Input power | 26W |
| Lumens output | 3588lm |
| Efficiency | 138M/W |
| CRI | >80 |
| Color Temperature | 5000K |
| Input voltage | 120-277V/AC |
| Light distribution type | 120D |
| Working temperature | -20+45℃ |
| Junction temperature | <75℃ |
| lamps efficiency | ≥90% |
| Certificate | UL CUL DLC |
| Equivalent | 50-90W MH/HPS |


PRODUCT ORDERING GUIDE

ML-WPA-26W-50K-P


| | | | | |
|----|-----|-----|-----|---|
| 1 | 2 | 3 | 4 | 5 |
| ML | WPA | 26W | 50K | P |

- ☒ ML
- MINI LIGHT
- ☒ WPA
- WALL PACK
- ☒ 26W
- Power Output
- ☒ 50K
- CCT:5000K
- ☒ P
- Photocell

DIMENSION

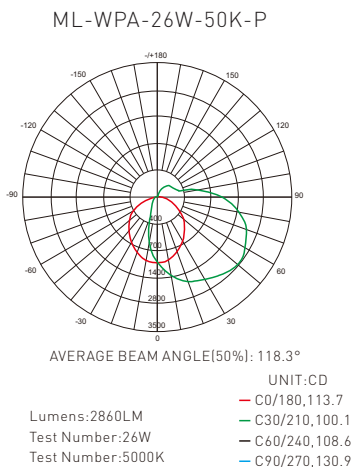

DIMENSION

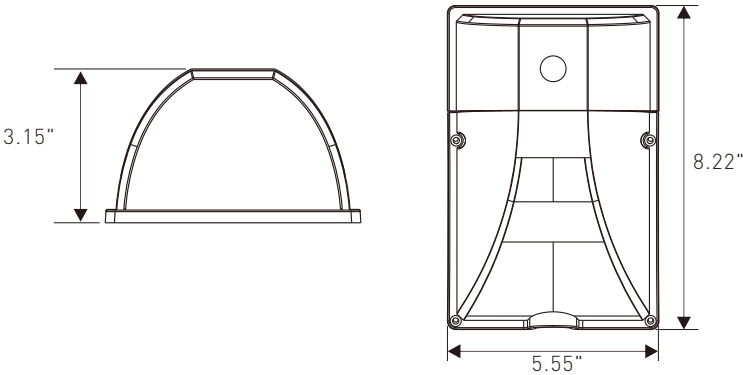

LED Mini Wallpack Installation Instruction

Cautions:


- 1.Can not use the electric generator to test the LED lamp.
- 2.Please abide by related country, regional and local law and regulations wheninstall this fixture.
- 3.Please turn off the power before installation or maintenance.
- 4.Proper earth grounding is required to ensure safety.

Notice:


- 1.To avoid possibility of electrical shock or fire, the installation personnel must haveprofessional electric knowledge.
- 2.Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediatelyand notify relevant personnel.

Attention:


- 1.Please check if there is any damage during shipping. If so, please contactmanufacturer timely.
- 2.Please read the installation instruction carefully to check whether all theaccessories are complete.After confirmation, then install the fixture according to installation steps.




1、Remove the cover screw




2、Then remove the wire cover screw



3、Punches according to wall position
And in the screw position waterproofglue



4、Fix the shell to the wall

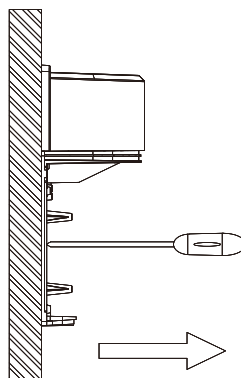

5、Cover screw twisted

