



Technical Parameters

Model No.	HD-FL02-250WA-V-CD	HD-FL02-500WA-V-CD	HD-FL02-750WA-V-CD	HD-FL02-1000WA-V-CD	HD-FL02-1250WA-V-CD
Dimension(mm)	L483*W291.72*H134.5	L510*W563.8*H136.25	L510*W764.8*H136.25	L510*W965.8*H136.25	L510*W1165.8*H136.25
Input Voltage(V)	AC100-277V/AC200-480V				
Wattage(W)	250W	500W	750W	1000W	1250W
CRI	RA70				
Lumen(Lm)	32,500LM	65,000LM	97,500LM	130,000LM	162,500LM
Beam Angle(°)	10°/30°/60°/120°				
Certificate	UL/DLC/CE/ROHS/CB				
CCT	3000K/4000K/5000K(Standard)/6700K/6500K				
Light Source	Lumileds/Samsung				
Power Factor	0.93				
THD	<15%				
Surge Protection	10KV Current Surge Protector				
Driver	Meanwell				
Operating Temp Range	-30°~ +50°				
IP Rating	IP66				
Dimming Control (Optional)	3 in 1(1-10V Dimming Control)				

Function Options

1-10V Dimming Control	Sensor Control	DALI Control	Occupancy Control
-----------------------	----------------	--------------	-------------------

Photometric Diagrams

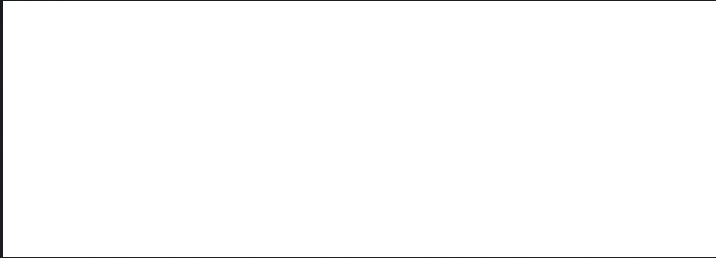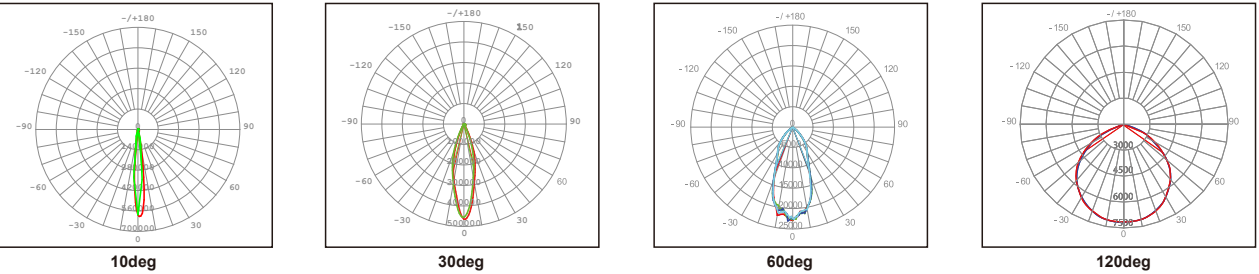

LED Flood Light

Top 2 Manufacturer of LED Flood Light in China



1250 W



Booth number:
1E-D30
1E-E27,E29,E31
3C-B15
GH-E23

LED Flood Light

Special lighting for wharves, stadiums, squares and other large places.


250W-1250W




- No screws appeared on the front view.
- Adjust the angle of each module without tools.
- Replace each module without tools.
- High-end industrial design shows a dramatic impact.



Single module rotation

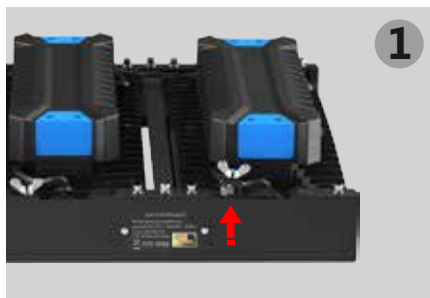


Screw off the wing nuts to be horizontal with the rear of light.

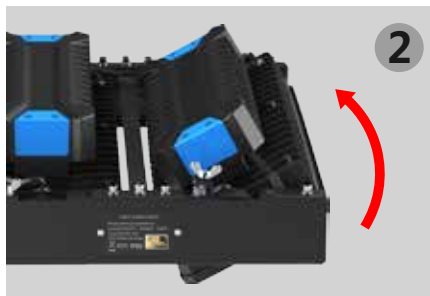


Rotational angle of single module is $\pm 30^\circ$.

Tooling replacement module

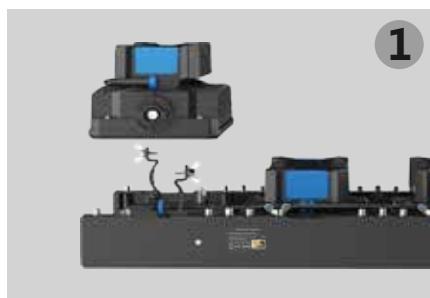


Screw off the wing nuts and revolve it to 90° .

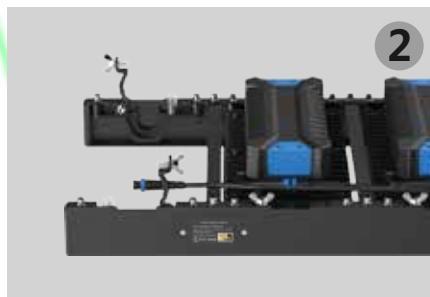

Fetch out the defective module.

Wattage

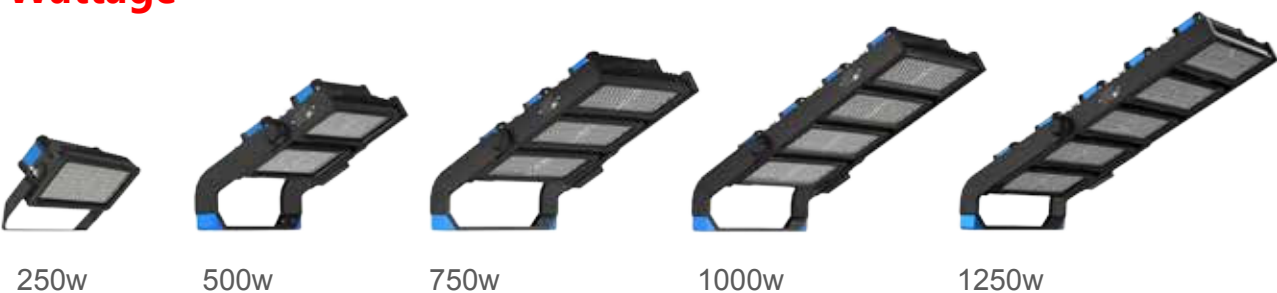

Auxiliary accessories





Visor




Laser diode aiming device

Waterproofing grade IP66

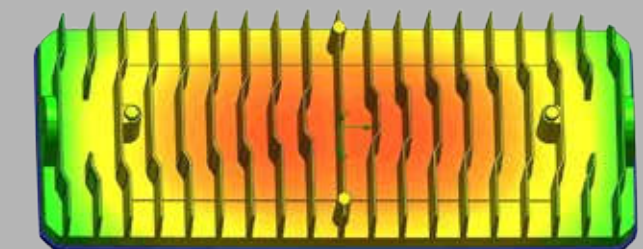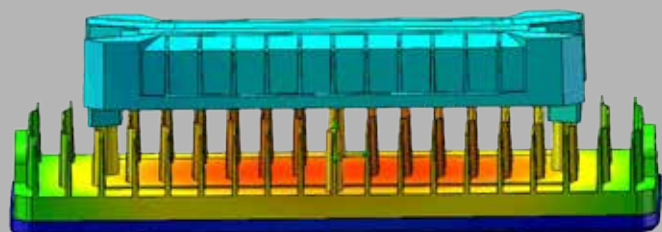

Ambient temperature under 30° ,
Driver temperature rise 32° ,
Chip temperature rise 50°

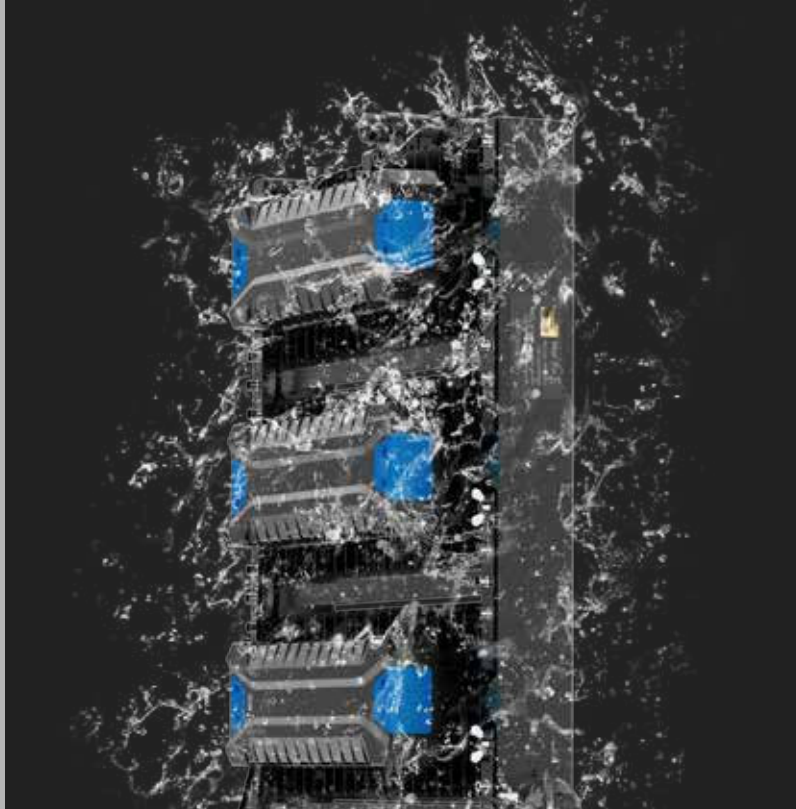

Installation

Trunnion Mount Kit



Stereo Base Installation



Knuckle Mount Slip Fitter Kit



Lumosa Tiny

