

Dimensions in inches

Product Type	A(max.)	B(max.)	C(max.)
20W (4')	47.8"	47.4"	47.22"

## Incredible 70,000 hrs

### GENERAL DESCRIPTION

Neptun's high performance LED T8 retrofits are designed for the replacement of existing T8 fluorescent lighting systems. The LED-RK88 series system is offered in a variety of color temperatures for flexibility in all types of applications. The frosted lens allows for an evenly illuminated glow resembling existing fluorescent tubes. Very low temperature operation saves on HVAC costs and long life greatly reduces maintenance costs. The LED driver wires the same as Instant Start T8 ballasts for fast and easy installation.

### APPLICATION


- Office Lighting
- School Lighting
- Healthcare Lighting
- Storage Lighting

### STRUCTURE, MATERIALS, & FEATURES

- Aluminum backing for excellent thermal management.
- Frosted non yellowing polycarbonate lens for even glow. (Glare Free)
- Correlated Color Temperatures of 3500°K, 4100°K, & 5000°K.
- 360 PCS High Output LED's.
- High power factor, low THD driver.
- InstantON flicker-free Cold Start and Hot Re-Start.
- Up to 15 years Maintenance free operation.
- Mercury free design.
- No radiated EMI interference.
- 5 Year Warranty.
- **Optional:** 0-10V Dimming, Remote Monitoring and ON/ OFF Control

### ORDERING INFORMATION

Sample Number: LED-RK88020-2L-UNV-841-R17D  
 Custom options and accessories available. Please consult factory

Series	Wattage	Driver	Voltage	Color Temp.	Options
LED-RK88 = T8 Retrofit Kit	020 = 20 W	1L = 1 Lamp System w/ Driver 2L = 2 Lamp System w/ Driver 3L = 3 Lamp System w/ Driver 4L = 4 Lamp System w/ Driver	UNV = 120-277 VAC UNV-0-10VDIM = 0-10V Dimming * Contact Factory for dimming options	835 = 3500°K 841 = 4100°K 850 = 5000°K	R17D = Recessed Double Contact Caps 



### PRODUCT INFORMATION


Model No.	Watts	Input Line Current (Amp) @ 120 - 277	Power Factor	THD	Color Temp. CCT (°K)	CRI	Lumens	Lm/W	Nominal Length (Inch)	Base	Beam Angle
LED-RK88020-UNV-835	20	0.174-0.075	>0.90	<20%	3,500°	>80	1,920	96	48"	G13	120°
LED-RK88020-UNV-841	20	0.174-0.075	>0.90	<20%	4,100°	>80	1,940	97	48"	G13	120°
LED-RK88020-UNV-850	20	0.174-0.075	>0.90	<20%	5,000°	>80	1,960	98	48"	G13	120°

### SPECIFICATIONS


- LED Driver ..... Constant Current
- Power Supply ..... 350mA
- Start Method ..... InstantON
- Hot Re-start ..... InstantON
- Driver Line Voltage ..... 120-277 VAC
- Lamp Voltage ..... 36-42 VDC
- Input Line Frequency ..... 50/60 Hz
- Ballast Off-State Draw ..... 0 Watts
- Sound Rating ..... Class A
- ANSI Surge Protection ..... Class A
- LED / Driver System Life ..... 70,000 Hrs.
- Lumen Maintenance @50,000Hrs ..... > 70%
- Color Temperature ..... Various
- Color Rendering Index (CRI) ..... > 80
- Minimum Starting Temperature ..... -20°C
- Maximum Starting Temperature ..... 50°C
- Lumens per Watt ..... > 100
- Shock / Vibration Resistant ..... Yes
- Power Factor ..... > 0.90
- Total Harmonic Distortion ..... < 20%
- ETL Listed / UL Standard 1993 ..... Yes
- FCC Compliance ..... Part 15, Subp. C
- Warranty ..... 5 Year

### WIRING DIAGRAM (See Complete Installation Instructions)


1 Lamp T8 System

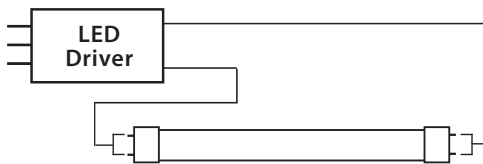

2 Lamp T8 System

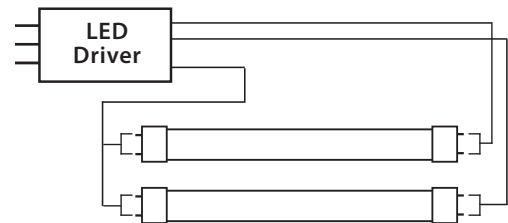

3 Lamp T8 System

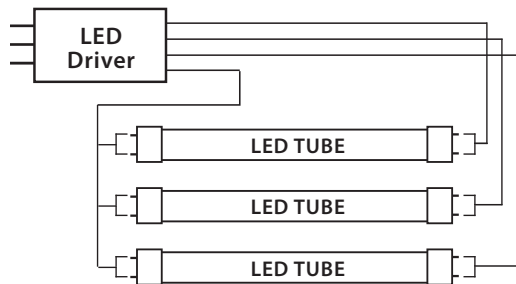

4 Lamp T8 System

