



# CCT Tunable LED Troffer Light

## Product Description

LED SION CCT tunable light use best die-casting aluminum+PC housing, anti-corrosion painting design. High-performance  
Replace 50-150W MH/HPS.

## Advantage

- ETL, DLC Premium certificate
- Input voltage 100-277VAC.
- Multiple CCT Switchable
- 0-10V Dimming
- Aluminum Heatsink for Efficient Heat Dissipation
- Diffusers: extruded impact modified acrylic for increased durability



## Applications

Offices, schools, showrooms, airports, retail locations and healthcare facilities.






# CCT Tunable LED Troffer Light

## Specifications

Model No.	DM-TR922XXW	DM-TR924XXW
Input Power	30W	40W
Lumen	3900LM	5200LM
Product size	23.74" × 23.74" (603×603mm)	47.76"×23.74" (1212×603mm)
Lumen Efficiency	130lm/W	
Color Temperature	3500K - 4000K - 5000K	
CRI	>80	
Viewing Angle	110 Degree	
Input Voltage	100-277VAC 50/60Hz	
PF	≥0.9	
THD	≤20%	
Driver Brand	China brand driver	
Dimmer	0-10V Dimming	
Housing	Aluminum+PC	
Housing Color	White	
Waterproof Rating	DAMP (IP41)	
Operating Temperature	-40℃ TO 45℃	
Operating Humidity	20%-90% RH	
Storage Temperature	-40℃ TO 80℃	
Storage Humidity	10%-95% RH	
Warranty Time	5 Years	

## Photometrics

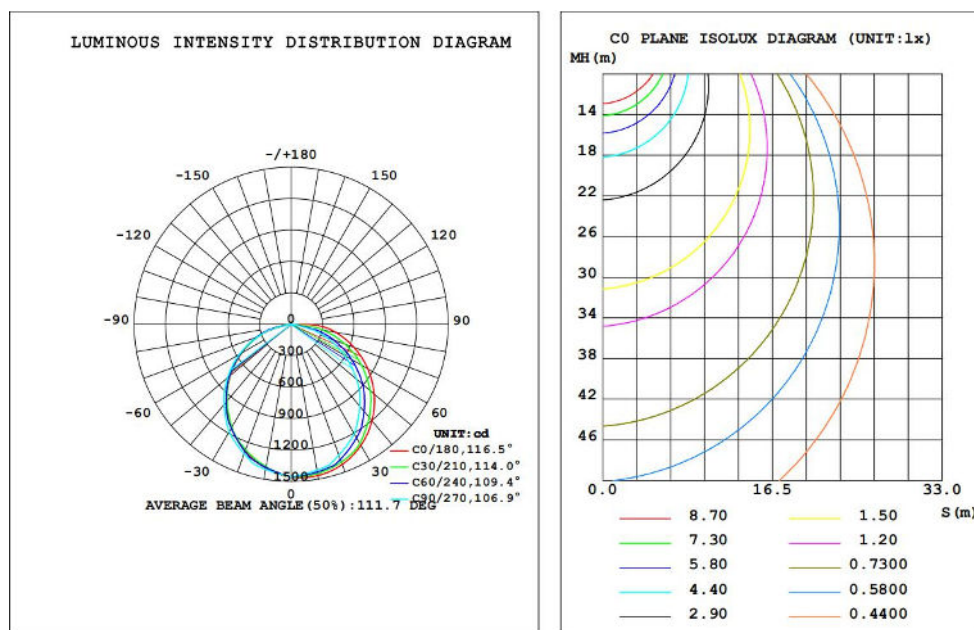





# CCT Tunable LED Troffer Light

## Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the Linear Highbay LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

## Dimension

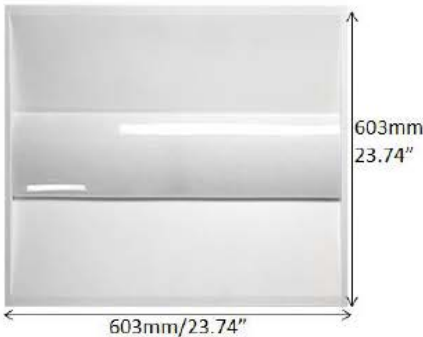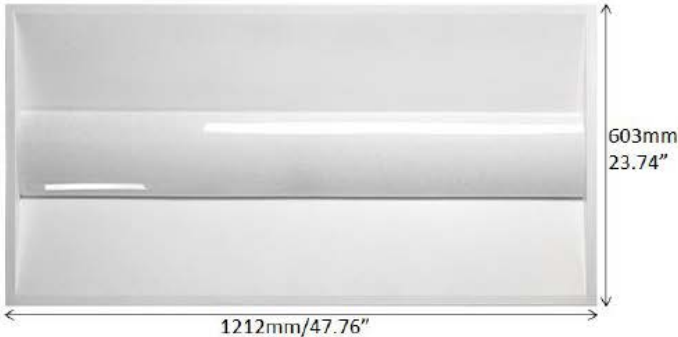




# CCT Tunable LED Troffer Light



## Packing

Model	Length/cm	Width/cm	Height/cm	Qty/ctn	G.W/kg
2x2	65.5	10.5	65.5	2	7
2x4	126	10.5	65.5	2	14.5

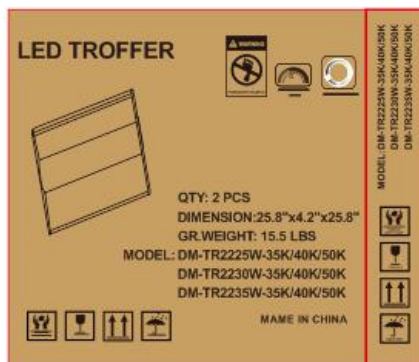

## Notice for User

Please turn off power before install or change assembly parts.  
The input voltage and lamps should be matched, after connecting the power line,  
Please make sure the wiring section is insulated.  
No-professionals, must not install and disassemble the lamps.

## After-sale Service

The product refers to electrics knowledge. Please don't disassemble it by yourself.  
If any quality problem happens, please contact the factory for warranty details.  
NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.