



FIXTURE CODE: **VCM**

LIGHT ENGINE RETROFITS

- L70 Rated life of 100,000+ hours
- Minimum CRI: 70; Custom CRI available upon request.
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Eligible for Rebates
- 50-90% energy savings
- Manufactured in the USA


INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional support

WARRANTY

- 5-year manufacturer's warranty
- **10YR** - Optional 10-year manufacturer's warranty
- U.S. manufacturing and quality control

CERTIFICATIONS



VAPORPROOF.CM

APPEARANCE

HOUSING	LENS	MOUNTING	DIFFUSION
• GRAY	• CLEAR GLASS	• CEILING	• NONE

FIXTURE INFORMATION

- CSA Listed for wet locations

ELECTRICAL CHARACTERISTICS

- Standard AC input: 120-277 VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard

OPTIONAL UPGRADES

- **HV1** - 480V up to 150W
- **HV2** - 480V greater than 150W
- **FR** - Frosted Lens
- **EM** - Emergency Battery Backup, 5W, 600 Lumens, 90 Minutes*

*MUST PROVIDE EXACT VOLTAGE REQUIREMENTS


OPTIONAL BEAM SPREAD AND TYPE DISTRIBUTION

- **80D** - Optional 80° Beam Spread

DIMENSIONS

Length: 11.5"

Width: 5.13"

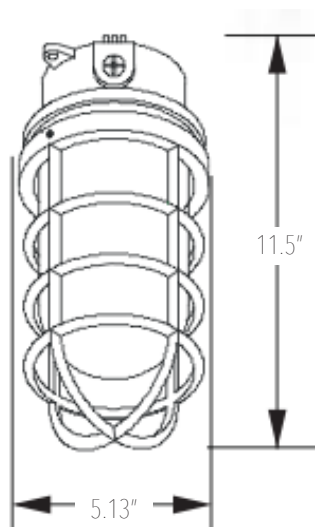



LIN-024-FIN

DRIVE CURRENT	WATTAGE	REPLACES	LUMEN OUTPUT	CATALOG #
A	24W	60-125W	3,576lm	LIN-024-FIN-A-CW-MT-VCM
B	36W	90-185W	5,054lm	LIN-024-FIN-B-CW-MT-VCM