


AVPL GL - Globe Series

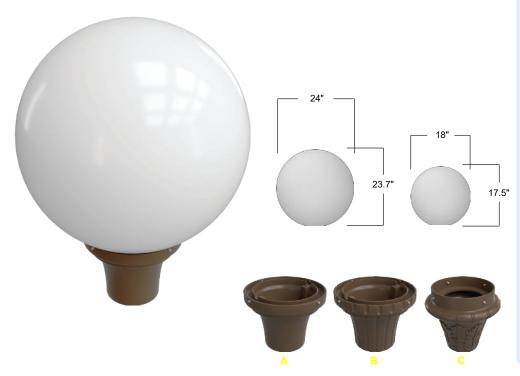

Description

This traditional Globe is an inexpensive solution for a variety of lighting applications. The GL series by AV Poles and Lighting is ideal for commercial, municipal and design build applications.

Materials

Available with clear smooth or smooth opal lens in either acrylic or polycarbonate construction.

Medium base porcelain socket.

Cast aluminum fitter.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

| Luminaire | Lamp Type | Volts | Mounting | Finish | Options |
|--------------------------|---|-------------------------------------|----------------|-------------|---|
| AVPL- GL-24 AVPL- GL-18 | LED 24W 36W 60W (350mA) (350mA) (350mA) PSMH 70W 100W 150W | 120 208 240 | | Dark Bronze | Clear Opal Smooth Smooth Acylic Acrylic House Internal Glass Side Louver Refractor |
| Fitter | 0 0 0 | 0 | ◯ Wall Mount 어 | White | Shield (Type V) (Type III,V) |
| O A | HPS 70W 100W 150W | 277 | Post Top | Grey | Internal Glass Chimney |
| | Color Temp | МТ | | Green | Electrical 10-20KV 0-10V Photo Surge Dimmable Cell + Protector Driver(s) Voltage |
| | 3000K 4000K 5000K Warm Natural Cool = LED Only | 120-277 Voltage Sensing = LED Only | | | High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor |