

Incredible **100,000** hrs

## GENERAL DESCRIPTION

Neptun's LED bollards features architectural design and durability to make it an excellent choice for new construction or retrofit applications. The LED-B96 series feature custom engineered optics for excellent illumination and uniformity. It can replace existing HID & HPS fixtures up to 100W.

## APPLICATION

- Security Lighting
- Area Lighting
- Walkway Lighting
- Landscape Lighting

## STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing.
- High Efficiency, UV protected, non-yellowing polycarbonate lens.
- Corrosion resistant electrocoat black finish (custom colors available).
- Continuous silicone gasketing surrounds lens for weather - tight seal.
- High output COB LED's.
- Bright white light (5000°K) for greater visibility and safety.
- High power factor, low THD driver with 6kV/3kA surge protection.
- InstantON flicker-free Cold Start and Hot Re-Start.
- Up to 15 years Maintenance free operation.
- 5 Year Warranty on complete fixture. (LED's & Housing)

## ORDERING INFORMATION

Sample Number: LED-BL96-015-UNV-850-BLK  
Custom options and accessories available. Please consult factory

| Series             | Wattage    | Voltage          | Color Temp.   | Color   |
|--------------------|------------|------------------|---|---|
| LED-BL96 = Bollard | 015 = 15 W | UNV = 120-277VAC | 835 = 3500°K<br>841 = 4100°K<br>850 = 5000°K*<br>* Standard | BLK = Black <span style="display: inline-block; width: 10px; height: 10px; background-color: black; vertical-align: middle;"></span><br>* Custom Colors Available |




### PRODUCT INFORMATION

| Model No.       | Description     | Rated Watts | Input Watts | Delivered Lumens | Universal Line Voltage (VAC) | Max Line Current (Amp) @ 120 - 277 | THD  | Power Factor | Weight |
|-----------------|-----------------|-------------|-------------|------------------|------------------------------|------------------------------------|------|--------------|--------|
| LED-BL96015-UNV | Bollard Fixture | 15          | 16          | 1,250            | 120 - 277                    | 0.13 - 0.05                        | <20% | >0.90        | 20 lbs |

### SPECIFICATIONS

- LED Driver ..... Constant Current
- Power Supply ..... 350mA
- Start Method ..... InstantON
- Hot Re-start ..... InstantON
- Universal Input Line Voltage ..... 120-277 VAC
- Input Line Frequency ..... 50/60 Hz
- Driver Off-State Draw ..... 0 Watts
- Sound Rating ..... Class A
- Projected (L70) @ 25°C ..... > 100,000 hrs.
- Color Temperature ..... 5,000°K
- Color Rendering Index (CRI) ..... > 80
- Minimum Starting Temperature ..... -40°C
- Maximum Starting Temperature ..... +50°C
- Lumens per Watt ..... > 80
- Shock / Vibration Resistant ..... Yes
- Power Factor ..... > 0.90
- Total Harmonic Distortion ..... < 20%
- Inrush Current Peak ..... < 10 Amp
- FCC Compliance ..... Part 15, Subp. C
- IP Rating ..... IP65
- Warranty ..... 5 Year

### DRILLING PATTERN

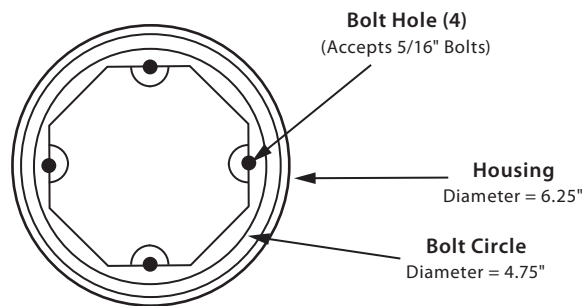

(Bolts Not Included)