

Post Top Lighting

YML-1PT34 Series




Applications


Parks, Shopping Malls, Courtyards, Historic Areas, etc.

- Efficiency of chips: 150-165 lm/w
- Structure: distinct design with retro appearance.
- LENS: high light transmittance PC lens with efficiency up to 93%-95%, anti-UV oxidation.
- Beam angle: Type V, 100°
- Lampshade: transparent PC, anti-UV
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated
- with powder coated finish for corrosion and static resistance.
- Installation: pole mounting
- Input voltage: 120-277 VAC, 50/60 HZ
- IP class: IP65


Dimension [Inch(mm)]

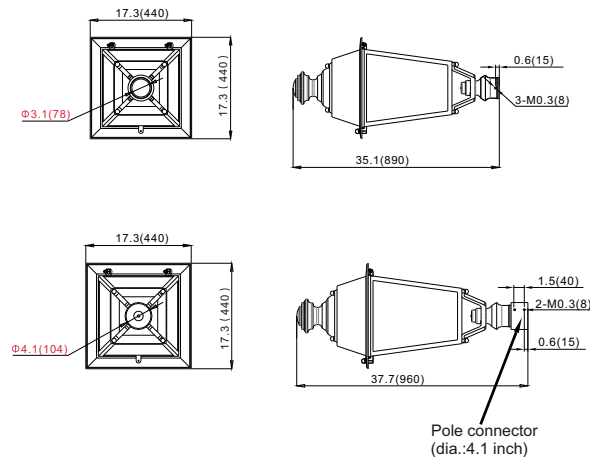


Distribution Curve Flux




YML-1PT34-25-750



YML-1PT34-40-750



YML-1PT34-60-750



YML-1PT34-80-750

Ordering Information

Example: YML-1PT34-25-750-B-5-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options
YML	1 120~277VAC 2 200~240VAC 3 120VAC 4 277~480VAC 5 347~480VAC	PT 34	25 (25W 2900Lumens) 25P (25W 3700Lumens) 40 (40W 4400Lumens) 40P (40W 5600Lumens) 60 (60W 6750Lumens) 60P (60W 8200Lumens) 80 (80W 8400Lumens) 80P (80W 10800Lumens) 100 (100W 11600Lumens)	7 70 8 80 9 90	27 2700K 30 3000K 40 4000K 50 5000K 57 5700K 65 6500K	B Black (standard) C Coffee S Silver	5 Type V 100 100	1 0~10V dimming 2 Timing dimming 3 Occupancy sensor (dimming control/ on off control) 4 Photocell 5 Wireless