



POLES & LIGHTING

AVPL-RSA-5" • ROUND STRAIGHT ALUMINUM SERIES • .125 WALL THICKNESS

ALUMINUM POLE SPECIFICATIONS:

SHAFT: One-piece extruded 6063-T6 aluminum alloy tube treated T6 temper. Available in .125, .188, .226 and .250 wall thickness.

ANCHOR BASE: Cast from A356 aluminum alloy and heat treated to T6 temper. Base plate and shaft are circumferentially welded top and bottom. The anchor base is provided with slotted holes.

ANCHOR BOLTS: Fabricated from carbon steel bar with minimum-yield. Strength of 55,000 PSI. Galvanized, per ASTM A-153. Each anchor bolt is furnished with two hex nuts and two flat washers.

BASE BOLT COVER: Two-piece standard full base cover is fabricated from heavy gauge quality carbon steel and pretreated with corrosion inhibitors. Provided with S304 stainless steel hardware. Spun and cast aluminum covers are available.

GROUNDING: Provision; 3/8-16 Threaded stud welded to inner shaft wall opposite hand hole. Flat washer and hex nut provided.

HAND HOLE: Reinforced 3" x 5" hand hole is located 18" above base. Cover and attachment hardware provided. Location at 90 deg. from drilling.

HARDWARE: S304 stainless steel

TOP CAP: Removable top cap provided with drill-mount poles.



FINISH: TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pretreatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

POLE DIMENSIONS				
POLE HEIGHT	TOP DIA. SIZE (in.)	BOTTOM DIA. SIZE (in.)	GAUGE	MOUNTING HEIGHT (ft.)
Per Pole Schedule	5.00	5.00	.125	Per Pole Height


BASE PLATE DIMENSIONS			
BOLT CIRCLE (in.)	BASE PLATE DIM. (in.)	BOLT HOLE (in.)	PLATE THICKNESS (in.)
Per Pole Schedule	11.00 sq.	Per Schedule	1.00

ANCHOR BOLT DIMENSIONS		ALLOWABLE WIND LOADING*
ANCHOR BOLT DIA. (in.)	ANCHOR BOLT LENGTH (in.)	
1.00	Per Schedule	Calculations are based on sustained Wind forces plus additional 1.3 wind gust. *SQ.FT


MAXIMUM EPA - SQ. FT.					
CATALOG NUMBER	MAX. FIXT. WT.	100 MPH	90 MPH	80 MPH	70 MPH
105-125	175	8.9	11.0	14.1	19.0
125-125	175	7.0	8.5	10.8	14.8
145-125	175	4.6	5.7	7.3	11.1
165-125	100	3.4	4.2	5.4	7.5
185-125	100	2.4	3.1	4.0	5.8

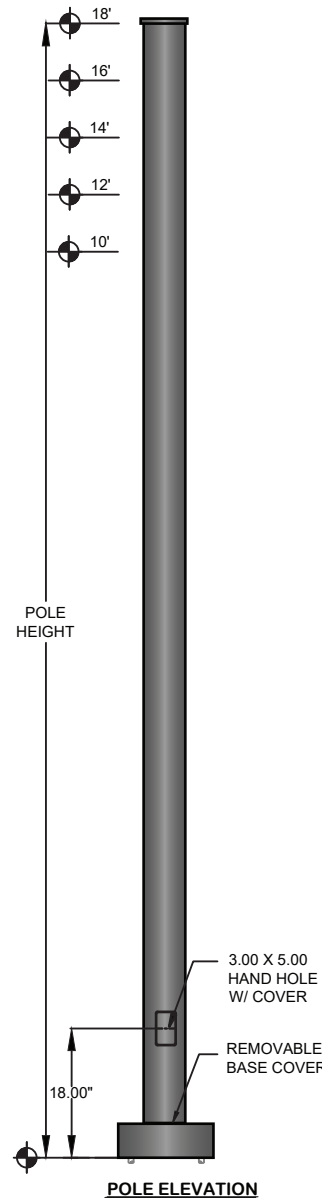


DRILLED MOUNT STYLES



TENON MOUNT STYLES




ANCHOR BOLT
MINIMUM.....3 1/2"
MAXIMUM.....3 3/4"

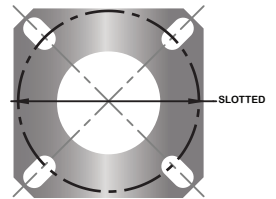

AL-5 TEMPLATE
11.00 X 11.00 X 1.00 ANCHOR PLATE
11.50\"/>

STANDARD COLORS AND FINISHES



OTHER COLORS AND FINISHES AVAILABLE - SEE ACCESSORIES CUTSHEET.

RSA 5" POLES	CATALOG	POLE SCHEDULE					MOUNTING OPTIONS					FINISH		
		NO.	AVPL-RSA-5" ROUND STRAIGHT ALUMINUM SERIES					1@90°	2@180°	2@90°	3@90°		4@90°	STANDARD: DBZ BLK WHT GRY GRN OPTION: ANOD
			POLE HEIGHT	SHAFT SIZE	WALL GAUGE	BOLT CIRCLE	ANCHORAGE							
		105-125	10'	5" DIA	.125	11 1/2"	1" X 36" X 4"	DRILLED DM19 (1@90°)	TENON PT23	ARM STYLE SPECIFY (SEE ARM CUTSHEET SPECS)				
		125-125	12'	5" DIA	.125	11 1/2"	1" X 36" X 4"	DM28 (2@180°)	(2-3/8" O.D. x 4")					
		145-125	14'	5" DIA	.125	11 1/2"	1" X 36" X 4"	DM29 (2@90°)	PT27					
		165-125	16'	5" DIA	.125	11 1/2"	1" X 36" X 4"	DM39 (3@90°)	(2-7/8" O.D. x 4")					
		185-125	18'	5" DIA	.125	11 1/2"	1" X 36" X 4"	DM49 (4@90°)	OTHER (SPECIFY):					

ORDER LOGIC:	SERIES	POLE HEIGHT	SHAFT SIZE	WALL GAUGE	BOLT CIRCLE	MOUNTING OPTIONS:	ARM STYLE	FINISH
EXAMPLE: AVPL-RSA-10-5-125-DM19-XX-GRY-XX	AVPL-RSA	-	5	-	125	-	-	-