




** AVAILABLE **

0 - 10V

FULL DIMMING

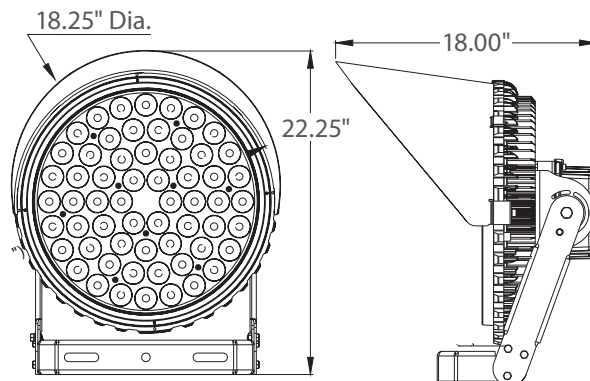

Incredible **100,000** hrs

GENERAL DESCRIPTION

Neptun's LED Sports/Flood Lighter fixture features an architectural design and durability to be used in new construction or retrofit applications. The LED-FL3 series fixture features excellent optics and its rugged design allows for use in a variety of indoor and outdoor applications. It can replace existing HID & HPS fixtures up to 1500 Watts.

APPLICATION

- Sports Field Lighting
- Sports Arena Lighting
- Gymnasium Lighting
- High-Mast Lighting
- Yard Lighting
- Area & Storage Lighting

STRUCTURE, MATERIALS, & FEATURES

- Pure aluminum housing with cooling fins.
- Heat and impact resistant polycarbonate lens.
- Continuous silicone gasket surrounds lens for IP65 weather - tight seal.
- Instant-On flicker-free Cold Start and Hot Re-Start.
- LED engine design with Advanced Thermal Management.
- High Output LED's.
- High power factor, low THD driver with 6kV/3kA surge protection.
Optional 20kV/10kA surge protector available.
- Up to 20 year maintenance free operation.
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- **Optional:** 0-10V Dimming, Wi-Fi Control, Remote Monitoring and ON/ OFF Control

ORDERING INFORMATION

Sample Number: LED-FL3-500-UNV-0-10VDIM-850-B10-SF
Custom options and accessories available. Please consult factory

| Series | Wattage | Voltage | Options | Color Temp | Beam Angle | Accessories |
|---|--|--|---|--|---|---|
| LED-FL3 = Sports / Flood Lighter | 300 = 300 W 400 = 400 W 500 = 500 W 600 = 600 W | UNV = 120-277 VAC 347V = 347 VAC 480V = 480 VAC | 0-10VDIM = 0-10V Dimming * Contact Factory for dimming options. | 841 = 4100°K 850 = 5000°K | B10 = 10° Beam (110lm/w) B30 = 30° Beam (140lm/w) B120 = 120° Beam (160lm/w) | SF = Slip Fitter Mounting Arm SP = 20kV/10kA surge protector |



PRODUCT INFORMATION

| Model No. | Description | Rated Watts | Delivered Lumens | Universal Line Voltage (VAC) | Max Line Current (Amp) @ 120 - 277 | THD | Power Factor | Weight |
|-----------------|-----------------|-------------|------------------|------------------------------|------------------------------------|------|--------------|--------|
| LED-FL3-300-UNV | LED Flood Light | 300 | 42,000 | 120-277 | 2.62 - 1.13 | <15% | >0.95 | 45 lbs |
| LED-FL3-400-UNV | LED Flood Light | 400 | 56,000 | 120-277 | 3.49 - 1.51 | <15% | >0.95 | 45 lbs |
| LED-FL3-500-UNV | LED Flood Light | 500 | 70,000 | 120-277 | 4.37 - 1.89 | <15% | >0.95 | 45 lbs |
| LED-FL3-600-UNV | LED Flood Light | 600 | 84,500 | 120-277 | 5.25 - 2.27 | <15% | >0.95 | 45 lbs |

SPECIFICATIONS

- Driver Constant Current
- Start Method InstantON
- Hot Re-start InstantON
- Driver UL Rating Class 1
- Driver UL Outdoor Rated Wet Location
- Sound Rating Class A
- ANSI Surge Protection IEEE C62.41 C High
- Driver Off-State Draw 0 Watts
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Projected (L70) @ 25°C > 100,000 hrs.
- Color Temperature 4,100°K / 5,000°K
- Color Rendering Index (CRI) > 80
- Beam Angle 10°/30°/120°
- Minimum Starting Temperature -40°C
- Maximum Starting Temperature +50°C
- Lumens per Watt > 130
- Shock / Vibration Resistant Yes
- Power Factor > 0.95
- Total Harmonic Distortion < 15%
- Inrush Current Peak < 10 Amp
- FCC Compliance Part 15, Subp. C
- EPA Rating 2.05 ft.²
- Housing IP Rating IP65
- Driver IP Rating IP67
- Warranty 5 Year

MOUNTING OPTIONS

Yoke Mount (Standard)



Slip Fitter Mount (SF)

