

Garage Site/ Canopy Lighting

YML-1GS03B Series

Models passed DLC listed:
YML-1GS03B-40
YML-1GS03B-60




UL1598



Applications


Parking Lots, Garages, Gas Stations, Corridors, Schools, Shopping Malls, etc.

Dimension[Inch(mm)]

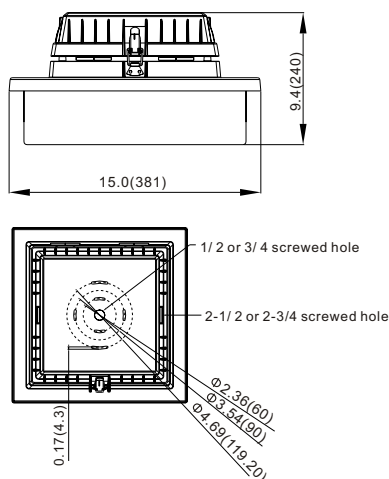

- Efficiency of chips: 150-165 lm/w, 170-180 lm/w
- Beam Angle: Type V
- Cover: high light transmittance PC, anti-UV oxidation.
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 100-277 VAC, 50/60 HZ
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP 53

Distribution Curve Flux



YML-1GS03B-80-750-V

Ordering Information

Example: YML-1GS03B-40-750-C-5-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options
YML	1 100~277VAC 2 200~240VAC 3 100~120VAC 4 277~480VAC 5 347~480VAC	GS 03B	40 (40W 4450Lumens) 40P (40W 4900Lumens) 60 (60W 6750Lumens) 60P (60W 7400Lumens) 80 (80W 8900Lumens) 80P (80W 9800Lumens) 100 (100W 11700Lumens) 100P (100W 12850Lumens)	7 70 8 80 9 90	27 2700K 30 3000K 40 4000K 50 5000K 57 5700K 65 6500K	C Coffee (standard) B Black S Silver	5 Type V	1 0~10V dimming 2 Timing dimming 3 Occupancy sensor (dimming control/ on off control) 5 Wireless