

NAME: LED Corn Light



Advantage

- UL, CUL, Certificate
- LG Innotek chip, high CRI.
- E26, E39 lamp base.
- 360-degree lighting.
- IP64 Waterproof Rating.
- Big heat sink, NO fans.
- Internal driver, input voltage AC100-277V.
- Sealant pouring for whole driver and lamp plastic housing.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide, easy Installation.
- Fits many different fixtures to replace traditional lamps.

Application

Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B).


Wattages	Part number	Lamp Base	Dimension (inch)	Lumen	Lumen per wattage	Input power	Equivalent	LED QTY
30W	EV-SLW-30WB1	E26	Φ 3.75"*8.6"	3250-3450 LM	120-127 LM/W	30W	60W CFL, 100W MHL/HPS/HID	100 PCS
40W	EV-SLW-40WB1	E26	Φ 3.75"*9.8"	4350-4600 LM	120-127 LM/W	40W	80W CFL, 150W MHL/HPS/HID	140 PCS
60W	EV-SLW-60WB1	E26	Φ 3.75"*11"	6500-6900 LM	120-127 LM/W	60W	120W CFL, 175W MHL/HPS/HID	200 PCS
80W	EV-SLW-80WB1	E39	Φ 5"*10.7"	10000-10800 LM	125-135 LM/W	80W	150W CFL , 250W MHL/HPS/HID	560 PCS
100W	EV-SLW-100WB1	E39	Φ 5"*11.5"	12500-13500 LM	125-135 LM/W	100W	200W CFL , 250W MHL/HPS/HID	728 PCS
120W	EV-SLW-120WB2	E39	Φ 5"*12.2"	15000-16200 LM	125-135 LM/W	120W	200W CFL , 400W MHL/HPS/HID	896 PCS
150W	EV-SLW-150WB1	E39	Φ 5"*14"	16500-17400 LM	110-116 LM/W	150W	400W MHL/HPS/HID	1064 PCS

Common Data


Color Temperature	4000K / 5000K
CRI	> 80
Viewing Angle	360 degree
Input Voltage	AC 100-277 V50/60Hz
PFC	>0.9
Waterproof Rating	IP64
Housing	Plastic+Aluminum
Housing Color	White + Grey
Operating Temperature	-20°C to 45°C / -4°F to 113°F
Operating Humidity	20%-70% RH

Corn light 30W

(Unit: mm)



Corn light 40W

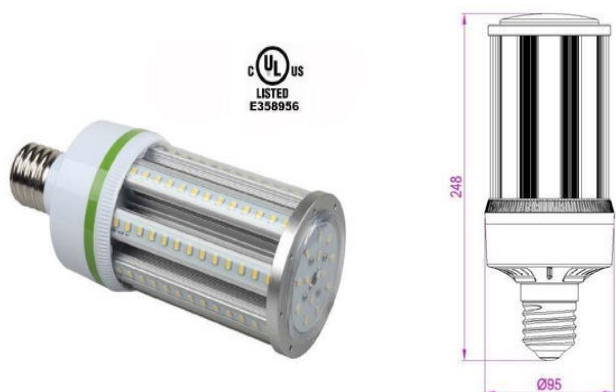

Corn light 60W



Corn light 80W



Corn light 100W



Corn light 120W



Corn light 150W

