



HAZARDOUS LOCATIONS LIGHT SPECIFICATION



J Series





Ratings and Certifications

- NEMA 4X, IP66
- UL1598/UL1598A/UL844/UL924
- **CSA C22.2 No.137/No.250.0**
- Class I, Division 1, Groups C, D
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups E, F, G
- Class III
- Marine and Wet Locations
- IECEX
- ATEX
- 5 years or other warranty period specified in agreement
- L70 rating for more than 150000 hours


Typical model specification

| Product Number | Wattage | Color | Voltage | Working Hours | Illumination Time |
|----------------|---------|-------|------------|---------------|-------------------|
| EX 3W J C I D1 | 3W | RE D | AC100 277V | 5 years | 3 hours |
| EX-7W JC1D1 | 7W | RE D | AC100-277V | 5 years | 3 hours |
| EX 11W1C1D1 | 11W | RE D | AC100 277V | 5 years | 3 hours |

Mechanical information

| | Size(in) |
|-----------------------|--------------|
| AC 100 – 277 V Models | 24 X 5 X 3.5 |

Structure Diagram

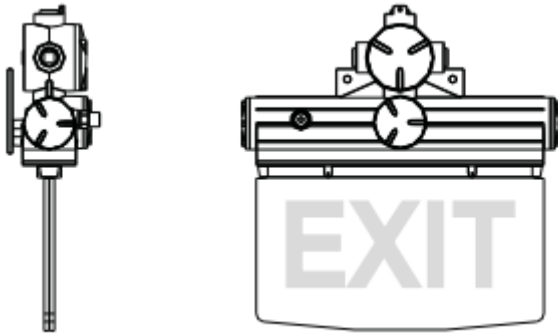

Technical Data

| | |
|----------------------------------|----------------------------|
| Permissible ambient temperature: | 10°C?55° C |
| Power: | 3-13W |
| Rated voltage AC: | AC100-277V |
| Frequency: | 50/60 Hz |
| Battery Warranty: | 5 Years |
| Enclosure material: | Copper free aluminum alloy |