

Incredible **100,000 hrs**

GENERAL DESCRIPTION

Neptun's 23" Induction Freezer / Gas Station fixture combines classic form and versatility to make it an excellent choice for new construction or retrofit applications. The 23 series canopy fixture is offered in a variety of wattages to provide maximum flexibility in all types of applications. It can replace existing HID & HPS fixtures up to 400W.

APPLICATION

- Canopy Lighting
- Gas Station Lighting
- Freezer Lighting
- Storage Lighting

STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing.
- Custom designed anodized aluminum reflectors for superior illuminance.
- High Efficiency, heat and impact resistant, UV protected, non-yellowing polycarbonate lens / refractor.
- Corrosion resistant electrocoat white finish (custom colors available).
- Hinged aluminum door frame.
- Continuous silicone gasketing surrounds lens for weather - tight seal.
- Inductively coupled circular induction bulb.
- High power factor, low THD electronic ballast with surge protection.
- Instant-On flicker-free Cold Start and Hot Re-Start.
- High quality glare-free light with high CRI above (83).
- Bright white light (5000°K) for greater visibility and safety.
- Advance phosphors for high lumen output and high lumen maintenance.
- Up to 20 year maintenance free operation.
- 10 Year Warranty.

ORDERING INFORMATION

Sample Number: 23080-UNV-850-LD-120V-WHT
 Custom options and accessories available. Please consult factory

Series	Lamp Wattage	Voltage	Color Temp	Accessories	Color
23 = 23" Canopy Fixture	080 = 80 W 100 = 100 W 120 = 120 W 150 = 150 W 200 = 200 W 250 = 250 W	UNV = 120-277 VAC 347V = 347 VAC 480V = 480 VAC	830 = 3000°K 841 = 4100°K 850 = 5000°K * * Standard	LD-120V = Photocell for 120V LD-277V = Photocell for 277V MD = Motion Sensor Detector	WHT = White * Custom Colors Available



PRODUCT INFORMATION


Model No.	Description	Rated Watts	Input Watts	Initial Lumens	Universal Line Voltage (VAC)	Max Line Current (Amp) @ 120 - 277	THD	Power Factor	Weight
23080-UNV	23" Canopy Fixture	80	82	6,400	120-277	0.87-0.37	<10%	0.98	28 lbs
23100-UNV	23" Canopy Fixture	100	105	8,000	120-277	0.87-0.37	<10%	0.98	28 lbs
23120-UNV	23" Canopy Fixture	120	126	9,600	120-277	1.05-0.45	<10%	0.98	28 lbs
23150-UNV	23" Canopy Fixture	150	158	12,000	120-277	1.31-0.56	<10%	0.98	28 lbs
23200-UNV	23" Canopy Fixture	200	210	16,000	120-277	1.75-0.75	<10%	0.98	30 lbs
23250-UNV	23" Canopy Fixture	250	265	20,000	120-277	2.18-0.94	<10%	0.98	30 lbs

SPECIFICATIONS


- Ballast Type Electronic
- Start Method InstantON
- Hot Re-start InstantON
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Lamp Operating Frequency 250 kHz
- Ballast Off-State Draw 0 Watts
- Sound Rating Class A
- ANSI Surge Protection Class A
- Lamp / Ballast System Life 100,000 Hrs.
- Lumen Maintenance @75,000Hrs > 70%
- Color Temperature 5000°K
- Color Rendering Index (CRI) 83
- Minimum Starting Temperature -20°F
- Maximum Starting Temperature 160°F
- Lumens per Watt 80
- Shock / Vibration Resistant Yes
- Power Factor > 0.98
- Total Harmonic Distortion < 10%
- Inrush Current Peak < 10 Amp
- ETL Listed / UL Standard 1598 Yes
- FCC Compliance Part 18, Subp. C
- IP Rating IP65
- Warranty 10 Year

MOUNTING OPTIONS

Surface Mount

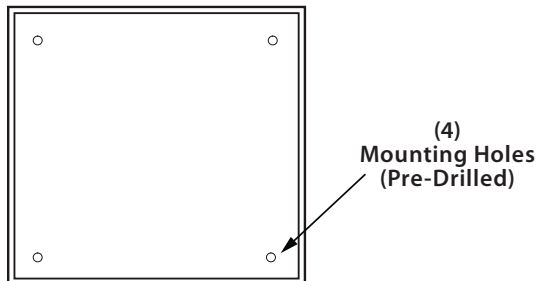

PHOTOMETRICS (See Complete IES File)



Type V Distribution