



TZ LIGHT

TZ LIGHT

Induction Flood Light

Model: TZ-FL-02





Features

- ◆ 70% more efficiency and 50% more energy saving: the light efficiency is 80-85 lm/w and the light could reach up to 140-150 pupil lumens per watt.
- ◆ The light's lifespan is as long as 100,000 hours and it's free from maintenance.
- ◆ People see clearer and healthier in more uniform light with 80+ CRI.
- ◆ High IP65 protecting class, resistant to corrosion, thermals and shocks.
- ◆ High pure mirror surface reflector particularly designed for induction lighting.



Application

- ◆ Billboards;
- ◆ Squares;
- ◆ Stadiums;
- ◆ Buildings;
- ◆ Factories.





Product Show





Specification


Model	TZ-FL-02-80W	TZ-FL-02-100W	TZ-FL-02-120W	TZ-FL-02-150W	TZ-FL-02-200W	TZ-FL-02-250W
Power	80W	100W	120W	150W	200W	250W
Lumen	6,400lm	8,000lm	9,600lm	12,000lm	16,000lm	20,000lm
Power Factor	>0.99	>0.99	>0.99	>0.99	>0.99	>0.99
Voltage	110-277VAC	110-277VAC	110-277VAC	110-277VAC	110-277VAC	110-277VAC
CCT	2700K - 6500K					
THD	≤ 10%, International THD Standard					
CRI	>80					
Luminous Efficiency	80-85 lm/w					
Cover	Tempered Glass					
IP Grade	Ip65					
Lumen Maintenance	40000H ≥ 80%					
Fixture Body	Die Casting Aluminium					
Working Temperature	-30°C ~ +45°C					
Lifespan	100,000 Hours					
Warranty	5 years					



Light Distribution Curve

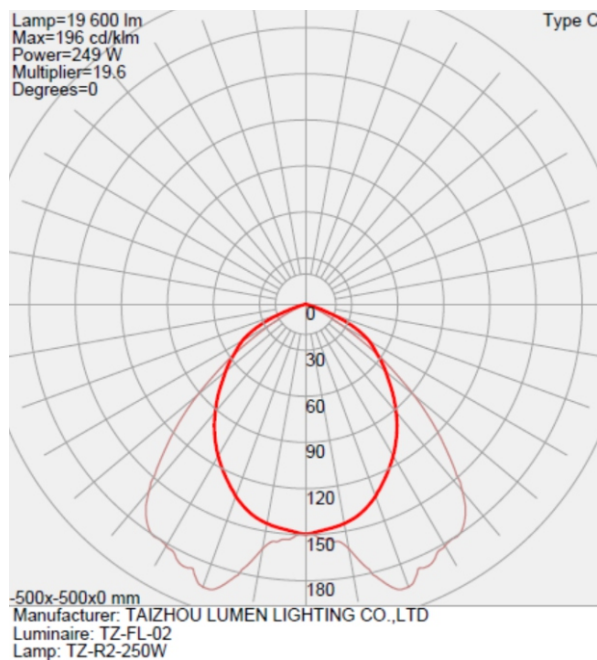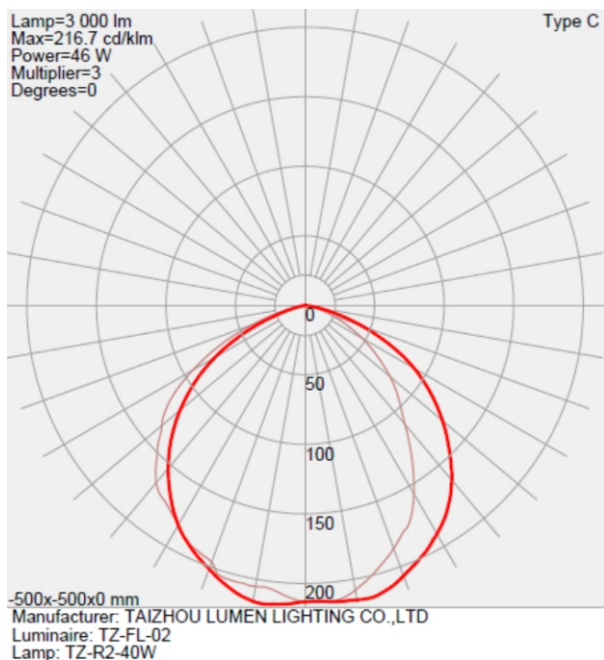


Dimensions

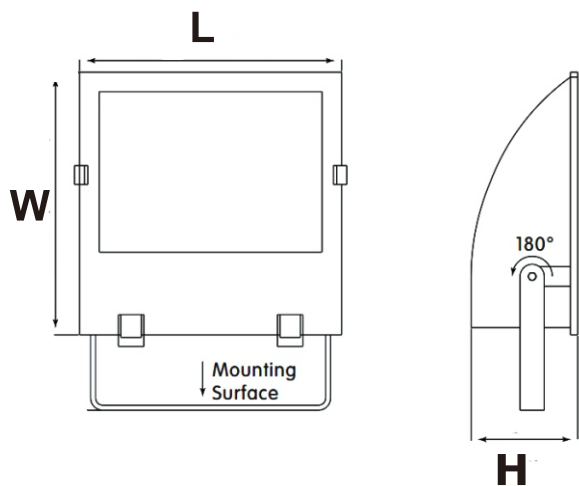

Power	Dimmension(mm)		
	L	W	H
80W	425	435	140
100W	425	435	140
120W	425	435	140
150W	425	435	140
200W	535	565	215
250W	535	565	215



Installation

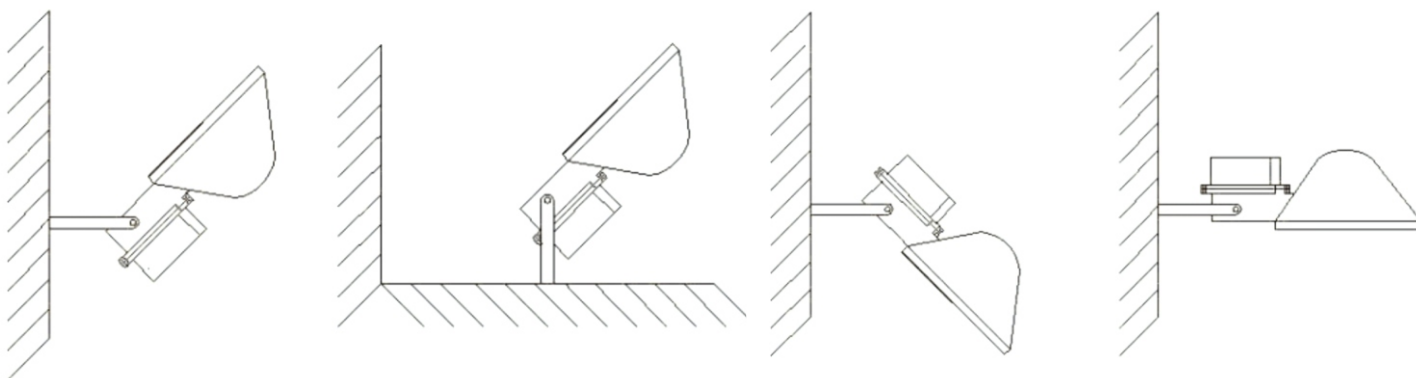

Packaging

Model	TZ-FL-02 80W	TZ-FL-02 100W	TZ-FL-02 120W	TZ-FL-02 150W	TZ-FL-02 200W	TZ-FL-02 250W
Carton Size(mm)	500*500* 250	500*500* 250	500*500* 250	500*500* 250	600*600* 280	600*600* 280
Qty/Carton (pcs)	1	1	1	1	1	1
G.W(kg)	6.5	6.5	7	7	8.5	8.5

