




DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

LG-CLP-330FAL

Large LED AREA/FLOOD light

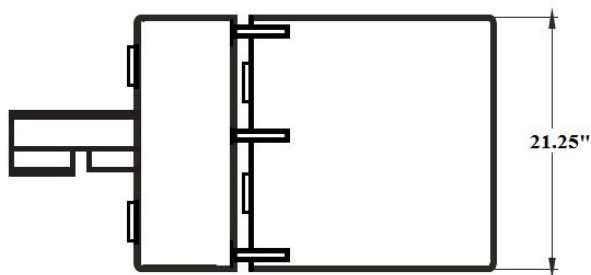

Large LED area or flood fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, parking garages, school campuses, Industrial/commercial spaces, wall washer, parking lots, recreational parks. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum & hinged front door frame.
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat bronze finish (standard) various colors available (custom).
- Clear prismatic polycarbonate lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Mount with Extruded Mounting Arms or Direct Pole Mount Arm

OPTIONS

- (OCC) Motion sensor
- (PC) Button photo cell
- (EMR) Emergency battery backup
- (GS) Glare shield
- (AEA) Adjustable extruded arm
- (EA6) 6" extruded arm
- (EA10) 10" extruded arm
- (EA12) 12" extruded arm
- (EA18) 18" extruded arm
- (SF) slip fitter
- (EAWM) extruded arm wall mount



Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
LG-CLP-330FAL-120CLED	125W	16,522	26,419	5000K	70+	>200,000	120-277V	50/60HZ	400w HPS
LG-CLP-330FAL-200CLED	215W	27,520	44,032	5000K	70+	>200,000	120-277V	50/60HZ	750w PSMH
LG-CLP-330FAL-250CLED	265W	23,978	38,367	5000K	70+	>200,000	120-277V	50/60HZ	1000w MH
LG-CLP-330FAL-360CLED	375w	46,032	73,651	5000K	70+	>200,000	120-277V	50/60HZ	1000w HPS

Ordering Guide

Example: (LG-CLP-330FAL-250CLED-50-MV-BZ-WC)

LG-CLP-330FAL					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
LG-CLP-330FAL	120W-120CLED 200W-200CLED 250W-250CLED 300W-300CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	OCC- MOTION SENSOR PC- BUTTON PHOTO CELL EMR- EMR BATTERY GS- GLARE SHIELD AEA-ADJUSTABLE EXTRUDED ARM EA6- 6" EXTRUDED ARM EA10- 10" EXTRUDED ARM EA12-12" EXTRUDED ARM SF- SLIP FITTER WC- WIRELESS CONTROL