


DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

SM-CLW-3032

Small LED Flood light

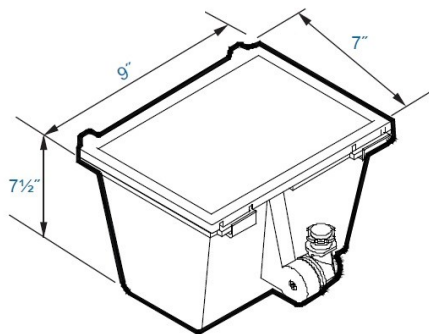

Small LED Flood light fixture, suitable for wet locations, Perfect for lighting up commercial landscape, walkways, entry ways, perimeters, school campuses, industrial/commercial spaces, sign lighter. This fixture has a wide rectangular light distribution. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat **bronze finish (standard)** various colors available (custom).
- Clear tempered glass lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box or use 1/2" Surface Conduit

OPTIONS

- (PC) Button photo cell
- (WG) Wire guard stainless steel
- (GS) Glare shield
- (WC) Wireless Control
- (FLSTK) Ground Stake
- (PTF) Post top fitter
- (PG) Polycarbonate guard

DESIGNLIGHTS
CONSORTIUM

NEMA

Wireless Controls
Available



PHILIPS
LUMILEDS

Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent	DLC Listed
SM-CLW-3032-5CLED	7W	757	1,211	5000K	70+	>200,000	120-277V	50/60HZ	35w HPS	No
SM-CLW-3032-10CLED	12W	1,376	2,201	5000K	70+	>200,000	120-277V	50/60HZ	50w HPS	No
SM-CLW-3032-15CLED	20W	1,918	3,068	5000K	70+	>200,000	120-277V	50/60HZ	70w HPS	No
SM-CLW-3032-18LED	21W	1,646	2,633	4000K	60+	>200,000	120-277V	50/60HZ	70w HPS	Yes
SM-CLW-3032-40CLED	45W	5,504	8,806	5000K	70+	>200,000	120-277V	50/60HZ	150w HPS	No

Ordering Guide

Example: (SM-CLW-3032-40CLED-50-MV-BZ-PC)

SM-CLW-3032					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
SM-CLW-3032	5W-5CLED 10W-10CLED 15W-15CLED 18W-18LED 40W-40CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	PC- BUTTON PHOTOCELL WG- WIRE GUARD GS- GLARE SHIELD FLSTK- GROUND STAKE PTF- POST TOP FITTER WC- WIRELESS CONTROL PG- POLYCARBONATE GUARD