



Description

Our Street Lights are becoming the primary selection for governments around the world looking to brighten their roads. The exquisite design of the model is only matched by its illuminance on the asphalt.



Not all product variations listed on this page are DLC qualified. To ensure that a specific model is qualified, visit www.designlights.org/search

Applications

Highways
Freeways

Neighborhoods
Streets / Roads

Specs

Efficacy
Input Voltage
Finish

150 lm/W
100-277V
Gray

Details

IP Rating
Materials
Lens
EPA Rating
L70 Life
Warranty
CRI
Certifications
Chip Man.
Whip Length

IP65
Die Cast Aluminum
Tempered Glass
0.35
150,000 Hours
10 Years
70+
UL, DLC 5.1, FCC, CE, RoHS, UFC
Philips
2.67'

Electrical

Power Factor
Frequency
Max THD
Operating Temp.

0.99
50/60 Hz
16%
-40° F to 113° F
-40° C to 45° C

Dimming


Optional

Ordering Information

ORDERING/DLC #:	Wattage	CCT	Lumens	Equivalent
U-ISL-30-30	30W	3000K	4,268 lm	150W MH
U-ISL-30-40	30W	4000K	4,320 lm	150W MH
U-ISL-30-50	30W	5000K	4,440 lm	150W MH
U-ISL-60-30	60W	3000K	8,100 lm	300W MH
U-ISL-60-40	60W	4000K	8,340 lm	300W MH
U-ISL-60-50	60W	5000K	8,580 lm	300W MH
U-ISL-90-30	90W	3000K	12,600 lm	450W MH
U-ISL-90-40	90W	4000K	12,960 lm	450W MH
U-ISL-90-50	90W	5000K	13,320 lm	450W MH
U-ISL-120-30	120W	3000K	16,800 lm	600W MH
U-ISL-120-40	120W	4000K	17,280 lm	600W MH
U-ISL-120-50	120W	5000K	17,760 lm	600W MH
U-ISL-150-30	150W	3000K	21,000 lm	750W MH
U-ISL-150-40	150W	4000K	21,600 lm	750W MH
U-ISL-150-50	150W	5000K	22,200 lm	750W MH

Additional Notes

- Check for ETA's
- Altech Electronics reserves the right to make periodic improvements to our product specs



Accessories and Options



Phenix External Emergency Inverter (18470X-3) (optional)




NEMA Photocell (optional)




Compatible with controls and integrations

Fixture Dimensions and Weight

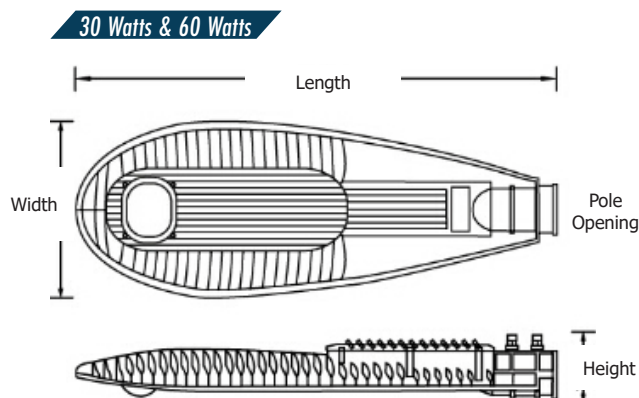

Length	Width	Height	Pole Opening	Weight
20.5 in.	8.6 in.	4.9 in.	2.2 in.	8.6 lb.
520 mm.	220 mm.	125 mm.	56 mm.	3.9 kg.

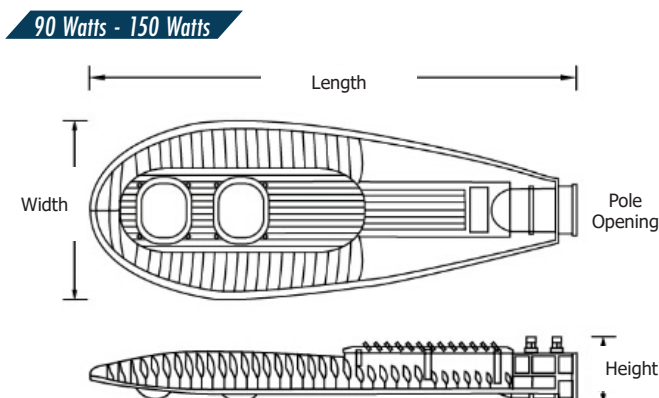

Length	Width	Height	Pole Opening	Weight
28.7 in.	11.6 in.	5.5 in.	2.5 in.	16.9 lb.
730 mm.	295 mm.	140 mm.	63.5mm.	7.6 kg.

Wiring Precaution

The international color scheme is brown (hot), blue (neutral) and green/yellow (ground) wiring. Always disconnect power when installing or troubleshooting. Consult a licensed technician.

