



LED Bollard Round Low Lumen 6 Series



Description

The LITELUME™ Bollard Collection (LL-B) features an anti-corrosion, shock resistant heavy duty die-cast aluminum housing for long-lasting durability. Easy installation and maintenance due to our self-oriented top cover design. A wide range of sizes and lumen packages allow for variety of applications. Introducing the Round Low Lumen 6 Series.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

Fixture Information

Size:	10W/18W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black Custom Options: White (WH) and Gray (GY)
Power Factor:	.95
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

360 to 720 lm

Lumens Per Watt (typical):

36 to 40 lm/W

CCT:

3000K
4000K
5000K

Distribution:

T5 120D

Lifespan:

100,000 hours

Ratings & Certificates

ETL Listed for Wet Location
IP65 Listed




Intertek



Dimensions

Item	Diameter	Length
Round Top	6.00"	32.00"
Flat Top	6.00"	31.50"

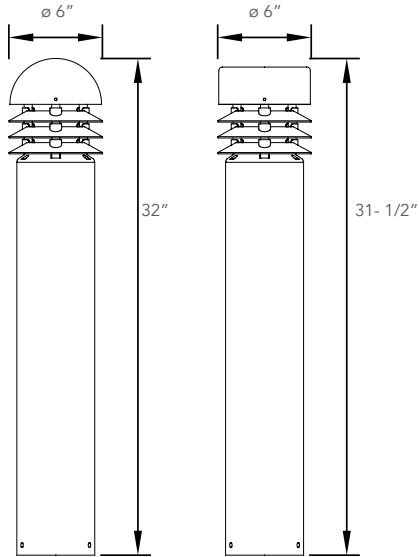

Photometric Data

