

CLP-257

Architectural Lighting
DESIGN - QUALITY



Crystal 
Lighting



CLP-257 Architectural Style Luminaire is available in two different sizes and multiple wattage. CLP-257 is suitable for outdoor, wet locations. It is essential for illuminating residential exteriors, walkways, perimeters, school campuses, commercial spaces, parking lots, and recreational parks.

- 10 year/100,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources.
- Improved lumen maintenance.
- Available in Type 3 and Type 5 Light Distribution.
- Utilizes high efficient Lumiled LED's.
- Operating temperatures: -30°C ~ 60°C.
- Driver: Constant current, 120~277v or 480v
- 10Kv Surge Protector. (standard)
- 0-10 Dimming, Occupancy Sensors, Photo Cell and Wireless Controls (Optional)

CONSTRUCTION

- Housing is Heavy-Duty CAST Aluminum.
- 3 Mil Powder Coating finish (standard).
- Opal Lens (Standard)
- Silicone Gasket to Prevent Leakage and provide Weather-Tight Protection
- Mounting: 2" 3/8 or 3"OD, Tenon or Round Pole (Standard), for other mounting please contact Factory.

Example: (CLP-257-1-35CLED-T3-30K-MV-FA-T23-BZ-WC)




LISTED

PHILIPS
LUMILEDS



CAT #	Wattage	Light Dist.	CCT	Driver	Lens	Mounting	Color	Options
CLP-257-1	20W (20CLED)	TYPE 3 (T3)	3000K (30K)	120-277 (MV)	Clear Seedy Acrylic (CSA)	Post Top 2" 3/8O.D (T23)	Bronze (BZ)	Photo Cell (PC)
	35W (35CLED)	TYPE 5 (T5)	4000K (40K)	480V (HV)	Opal Acrylic (PA)	Post Top 3"O.D (T3)	Black (BK)	Wireless Control (WC)
CLP-257-2	75W (75CLED)		5000K (50K)		Frosted Acrylic (FA)	<u>Pendant Mount Stem</u> (Comes with 1/2 Coupling)	Grey (GRY)	
	90W (90CLED)				Clear Tempered Glass (CTL)	1' (PM1) 2' (PM2) 3' (PM2) 4' (PM4)	White (WH)	
	120W (120CLED)						Custom (CST)	

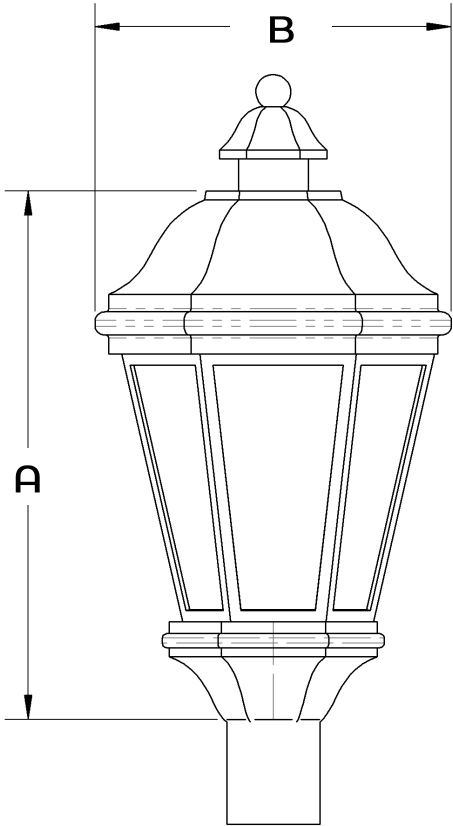

Shade Dimensions			EPA
CAT#	A	B	
CLP-257-1	24"	11"	1.1
CLP-257-2	32"	15"	1.76

CAT #	IMPOT POWER	LUMEN OUTPUT	LPW	COLOR TEMP	CRI	RATED LIFE	INPUT VOLTAGE	INPUT REQUENCY	HID Equivalent
CLP-257-1-20CLED	25W	3,650	182	5000K	70+	>200,000	120-277V	50-60HZ	100W HID
CLP-257-1-35CLED	42W	5,711	163	5000K	70+	>200,000	120-277V	50-60HZ	175W HPS
CLP-257-2-75CLED	84W	10,674	142	5000K	70+	>200,000	120-277V	50-60HZ	250W HPS
CLP-257-2-90CLED	97W	12,193	135	5000K	70+	>200,000	120-277V	50-60HZ	400W PSMH
CLP-257-2-120CLED	129W	20,201	168	5000K	70+	>200,000	120-277V	50-60HZ	400W HPS