


CLP-3040 Series

LED Area Fixture

DESIGN - QUALITY

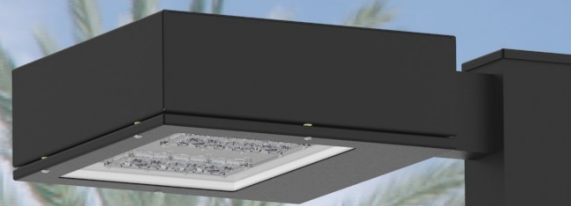

Crystal 
Lighting



CLP-3040 Area Fixture

CLP-3040 Series LED Area or Flood Fixture, Suitable for Wet locations. Perfect for lighting up Residential Exteriors, Walkways, Entry Ways, Perimeters, Storage Areas, Parking Garages, School Campuses, Industrial & Commercial Spaces, Parking Lots, Recreational Parks. This fixture has a wide light distribution.

10 year/100,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources.
- Improved lumen maintenance.
- High efficient Phillips Lumiled LED's.
- Operating temperatures: -30°C ~ 60°C.
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional).
- Suitable for Wet Locations.
- Options: Dimming, Occupancy Sensors, Photocell and Wireless Controls capable.
- Operating Life: >60,000 hours

CONSTRUCTION



- Housing Heavy-Duty Aluminum Housing.
- 3 Mill Powder Coat Finish, (Various colors available) (Custom).
- Types 2,3,4 and 5, Clear Optic. *Clear Tempered Lens in Flood light (*SLIP FITTER AND SWIVEL BRACKET)
- Silicone Gasket to prevent leakage and provide IP-66 Rated Product.
- Mounting: Extruded Arm 6", 10", 12" & 18", Swivel Bracket, Slip Fitter, 6" Arm Wall Mount.



Example: (CLP-3040S-10W-T5-30K-MV-BLK-EA6-OCC)



MODEL	WATTS	OPTIC	COLOR	VOLTAGE	FINISH	MOUNTING	OPTIONS
CLP-3040S	10W (10CLED) 20W (20CLED) 30W (30CLED) 40W (40CLED)	TYPE 2 (T2) TYPE 3 (T3)	3000K (30K) 4000K (40K)	120-277V(MV) 377V (347) 480V (480)	BRONZE (BZ) GRAY (GRY)	6" EXTRUDED ARM (EA6) 10" EXTRUDED ARM (EA10)	MOTION SENSOR (OCC) BUTTON PHOTO CELL (PC)
CLP3040M	60W (60CLED) 80W (80CLED) 100W (100CLED) 120W (120CLED)	TYPE 4 (T4) TYPE 5 (T5)	5000K (50K)		BLACK (BLK) WHITE (WH) CUSTOM (CST)	12" EXTRUDED ARM (EA12) AEA-ADJUSTABLE EXTRUDED ARM (AEA) *SLIP FITTER (SF) *SWIVEL BRACKET (SB) 6" EXTRUDED ARM WALL	EMR BATTERY (EMR) HOUSE SIDE SHIELD (HSS) WIRELESS CONTROL (WC)
CLP-3040L	150W (150CLED) 200W (200CLED) 250W (250CLED) 300W (300CLED)						

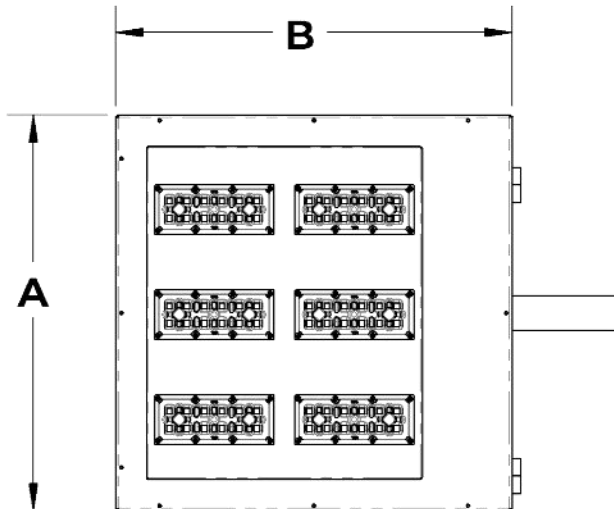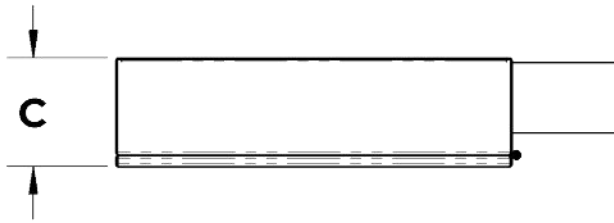

Shade Dimensions				EPA
CAT#	A	B	C	
CL3040S	12" 1/2	12" 1/2	5.1/4	.45
CL3040M	16" 1/4	16" 1/4	5" 1/2	.62
CL3040L	22" 5/8	22" 5/8	6" 1/4	.98

CAT#:	INPUT POWER	LUMEN OUTPUT	LPW	COLOR-TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLP-3040S	10W	1938	189	5000K	70+	>200,000	120-277V	50/60HZ	35W MH
CLP-3040S	20W	3650	182	5000K	70+	>200,000	120-277V	50/60HZ	50W HPS
CLP-3040S	30W	5222	174	5000K	70+	>200,000	120-277V	50/60HZ	70W PSMH
CLP-3040S	40W	6492	162	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3040M	50W	7320	146	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3040M	60W	8320	136	5000K	70+	>200,000	120-277V	50/60HZ	250W HPS
CLP-3040M	80W	10340	129	5000K	70+	>200,000	120-277V	50/60HZ	250W MH
CLP-3040M	100W	14640	146	5000K	70+	>200,000	120-277V	50/60HZ	400W PSMH
CLP-3040M	120W	16984	141	5000K	70+	>200,000	120-277V	50/60HZ	400W HPS
CLP-3040L	150W	20680	137	5000K	70+	>200,000	120-277V	50/60HZ	400W HPS
CLP-3040L	200W	30020	150	5000K	70+	>200,000	120-277V	50/60HZ	750W PSMH
CLP-3040L	250W	36600	146	5000K	70+	>200,000	120-277V	50/60HZ	1000W MH
CLP-3040L	300W	43620	145	5000K	70+	>200,000	120-277V	50/60HZ	1000W HPS