

CLP-3050

Architectural LED Luminaire
DESIGN-FUNCTION-QUALITY

Crystal Lighting Corp.





CLP-3050 Traditional Globe. Available in three different sizes and in multiple finishes. **CLP-3050** Post Mount Luminaire is commonly installed in exterior facilities such as: Public Parks, Shopping Plazas and other Business Facilities or Residential Areas.

-10 year/50,000hr limited warranty.

Features

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes highly efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant Current, 120~277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- 0-10 Dimming Driver, Occupancy Sensors, Photocell or Wireless Controls (Options)
- Operating Life: >200,000 hours

Construction

- Acrylic Globe and Diecast Aluminum Base.
- 3 Mil Powder Coat Finish
- Frosted, Clear or Opal Acrylic Lens (Options)
- Silicone Gasket to prevent leakage and provide weather-tight protection.
- Mounting: Over 3" OD Pole or Tenon, Adapter is required for other Poles Sizes or Shapes.

Example: CLP-3050-GL10-40CLEd-SYM-30K-MV-BLK-3OD-OAL




PHILIPS
LUMILEDS



NEMA



Cat #	Globe Sizes	Wattage	Light Dist.	Color Temp.	Voltage	Finish	Mounting	Options
CLP-3050	10" Globe (GL10)	20W (20CLEd)	Symmetric (SYM)	3000K (30K)	120-277V (MV)	Black (BLK)	3" OD (3OD)	Opal Acrylic Lens (OAL)
	14" Globe (GL14)	40W (40CLEd)		4000K (40K)		White (WHT)		Frosted Acrylic Lens (FAL)
	18" Globe (GL18)	60W (60CLEd)		5000K (50K)		Silver (SLR)		Clear Acrylic Lens (CAL)
						Bronze (BRZ)		
						Graphite (GPH)		
						Custom (CST)		

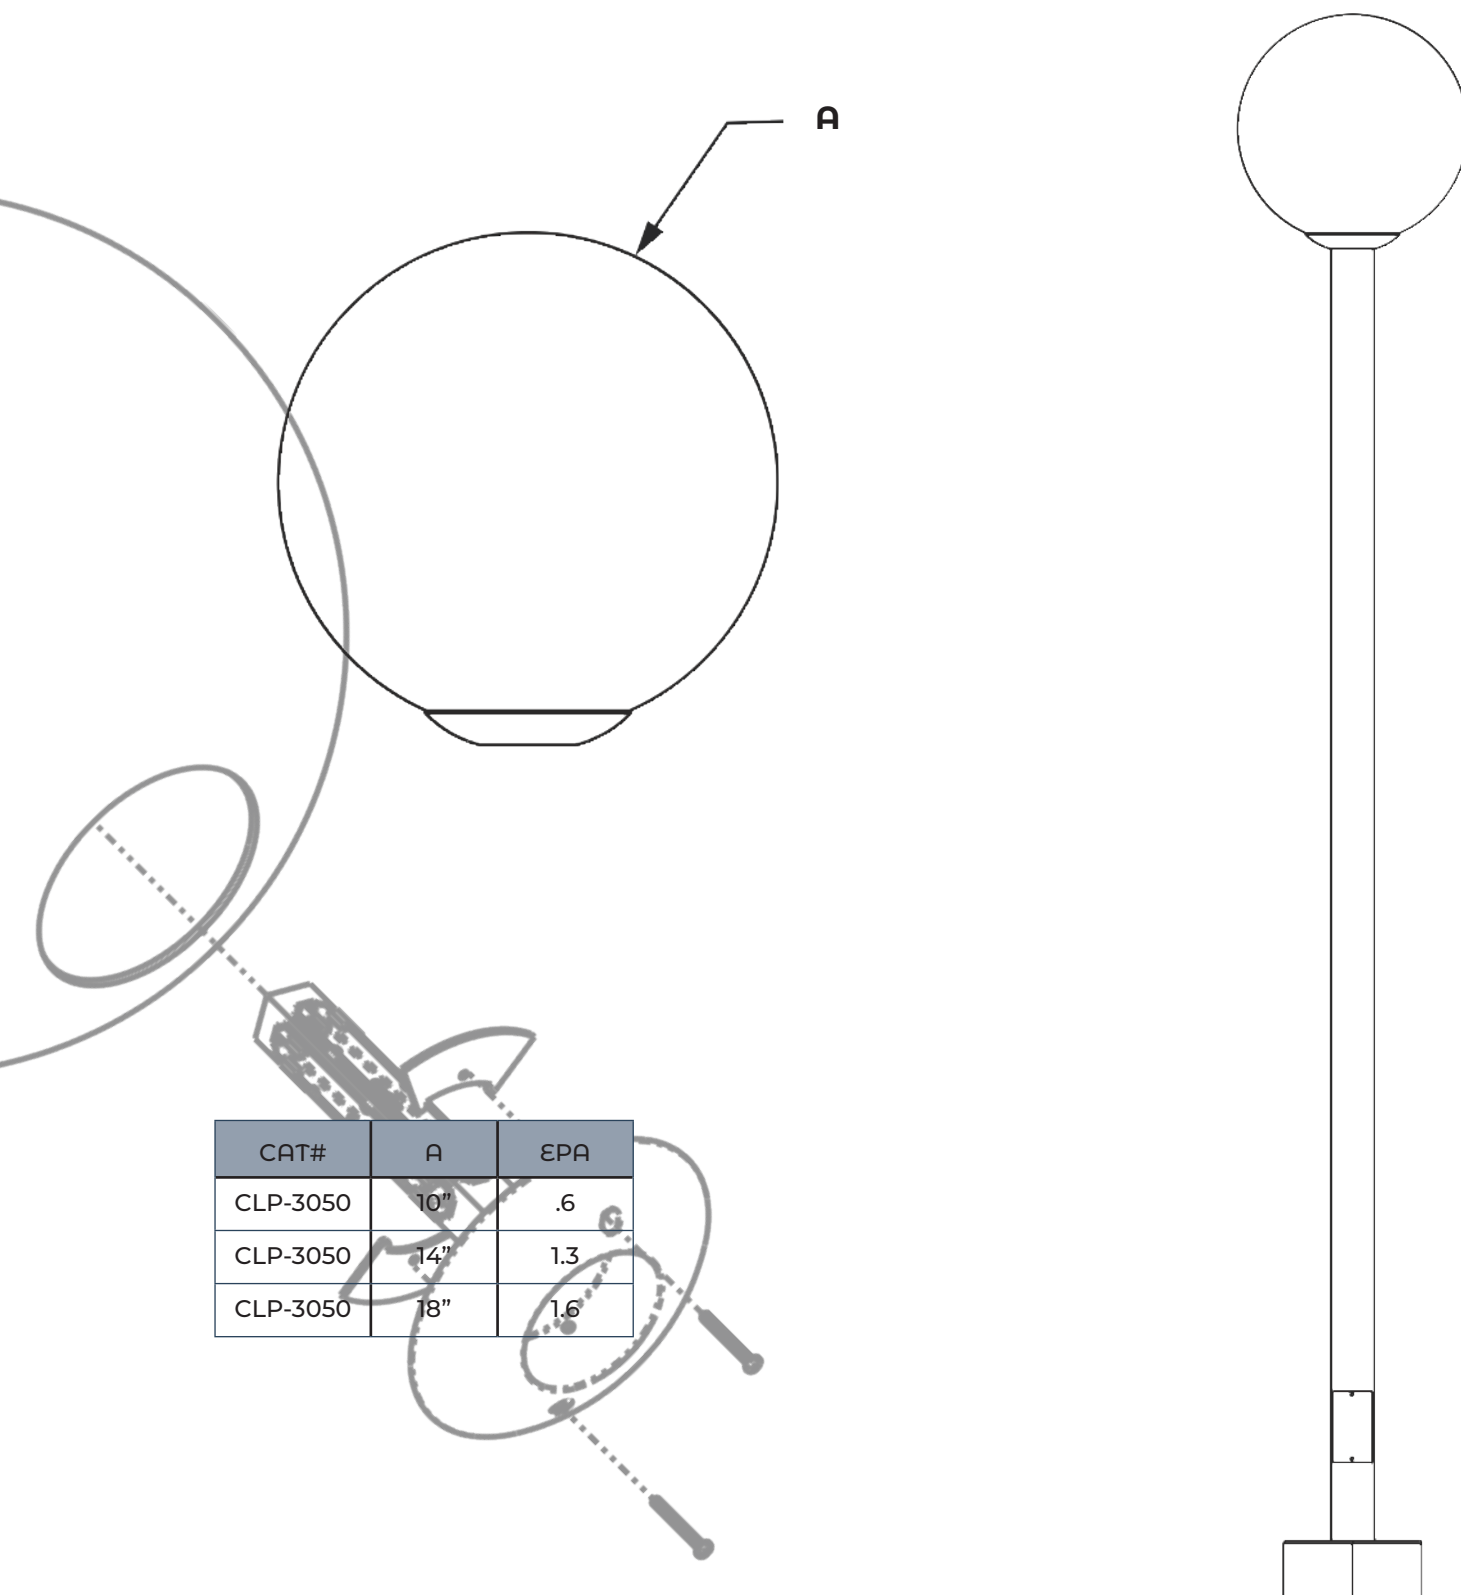

CAT#	A	EPA
CLP-3050	10"	.6
CLP-3050	14"	1.3
CLP-3050	18"	1.6

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	HID Equivalent
CLP-M56-20CLED	25W	3,120	156	5000K	70+	>200,000	120-277V	100W MH
CLP-M56-40CLED	45W	5,475	136	5000K	70+	>200,000	120-277V	150W MH
CLP-M56-60CLED	65W	8,784	146	5000K	70+	>200,000	120-277V	175W MH

Proudly Manufactured and Assembled in the USA