

CLP-3072 Series
LED Area Lighting
DESIGN - QUALITY



Crystal 
Lighting

CLP-3072 LED Area LED fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, parking garages, school campuses, Industrial/commercial spaces, wall washer, parking lots, recreational parks. This fixture has a wide light distribution.
-10 year/100,000 hour limited warranty.

FEATURES


- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- 10Kv Surge Protector. (standard)
- IP-66 Rated
- 0-10 Dimming, Occupancy Sensors, Photo Cell and Wireless Controls (Optional)
- Operating Life: >60,000 hours

COSTRUCTION.


- Housing is Heavy-Duty Spun Aluminum.
- 3 Mils Powder coat finish
- Clear glass lens standard, prismatic glass lens optional
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Arm Mount, Spider Mount, Yoke Mound. (SM and YM 3" O.D Standard)




OPTIC DISTRIBUTION




TYPE 2 (T2)



TYPE 3 (T3)



TYPE 4 (T4)









TYPE 5 (T5)

Example: (CLP-3072-120CLEd-50-MV-T5-BRZ-WC)



MODEL	WATTS	OPTIC TYPE	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	OPTIONS
CLP-3072	20W (20CLEd)	TYPE 2 (T2)	3000K (30K)	120-277V (MV)	BLACK (BLK)	6" EXTRUDED ARM (EA6)	MOTION SENSOR (OCC)
	40W (40CLEd)	TYPE 3 (T3)	4000K (40K)	377V (347)	WHITE (WH)	10" EXTRUDED ARM (EA10)	BUTTON PHOTO CELL (PC)
	60W (60CLEd)	TYPE 4 (T4)	5000K (50K)	480V (480)	BRONZE (BRZ)	12" EXTRUDED ARM (EA12)	HOUSE SIDE SHIELD (HSS)
	80W (80CLEd)	TYPE 5 (T5)			SILVER (SIL)	SPIDER MOUNT (SM)	WIRELESS CONTROL (WC)
	100W (100CLEd)				GRAPHITE (GPH)		
	120W (120CLEd)				MARINE GRADE (MG)	YOKE MOUNT (YM)	

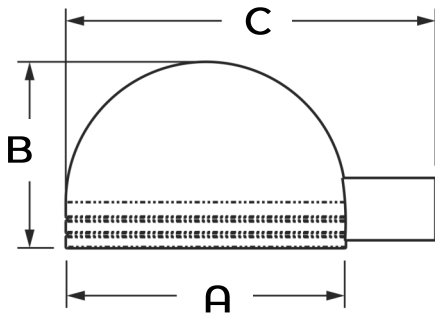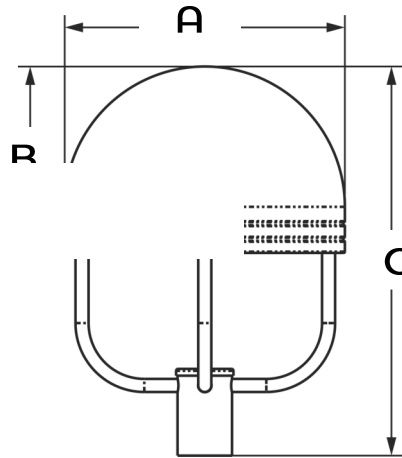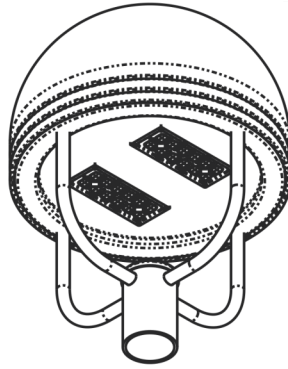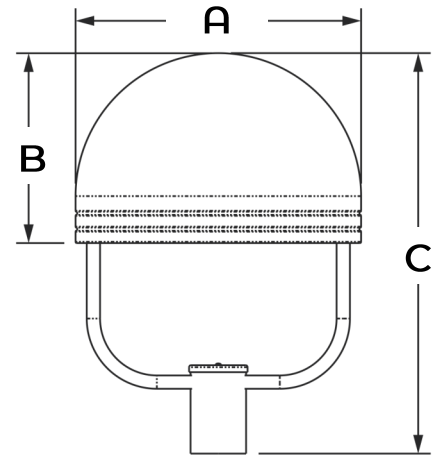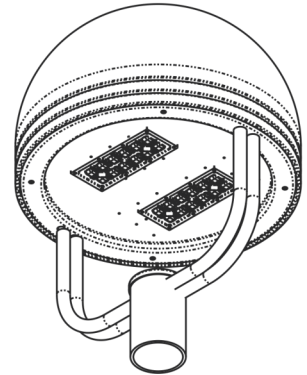ARM MOUNTSPIDER MOUNTYOKE MOUNT

Shade Dimensions				EPA
CAT#	A	B	C	
CLP-3072-AM	18"	12"	23" 3/4	1.16
CLP-3072-SM	18"	12"	25"	1.33
CLP-3072-ym	18"	12"	25"	1.25

CAT#:	INPUT POWER	LUMEN OUTPUT	LPW	COLOR-TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLP-3072	20CLED	3,650	182	5000K	70+	>200,000	120-277V	50/60HZ	35W MH
CLP-3072	40CLED	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ	50W HPS
CLP-3072	60CLED	8,559	142	5000K	70+	>200,000	120-277V	50/60HZ	70W PSMH
CLP-3072	80CLED	12,714	158	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3072	100CLED	14,265	142	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3072	120CLED	17,118	142	5000K	70+	>200,000	120-277V	50/60HZ	250W HPS