

CLP-5000 Series

Architectural LED Lighting
DESIGN - QUALITY



Crystal 
Lighting

Two black outdoor lanterns are shown against a white background. The lantern on the left is mounted on a short, thick black post, while the one on the right is mounted on a taller, thinner black post. Both lanterns have a classic design with a bell-shaped top, a decorative finial, and a curved frame supporting a glass-paned body. A red circular seal with the text 'MADE in the USA' and stars is located in the bottom left corner.

FEATURES:

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, Occupancy Sensors, Photo Cell and Wireless controls capable (optional)
- Operating Life: >60,000 hours

- Housing is spun aluminum material
- Powder Coat Black (5mil. standard) various colors available (custom).
- Clear flat glass lens (standard).
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Comes ready to mount over 3"1/2 Tenon (standard) can be built to mount on other size poles and shapes per your request (Adapter required)



LISTED





PHILIPS
LUMILEDS

Example: (CLP-5000-Sm-T2-50CLED-30K-mV-BZ-WC)


CAT #	MOUNTING	TYPE	WATTS	COLOR TEMP.	VOLTAGE	COLOR	OPTIONS
CLP-5000	SPIDER MOUNT (SM) YOKE MOUNT (YM)	TYPE 2 (T2)	20W (20CLED)	3000K (30K)	120-277V (MV)	BLACK (BLK)	Motion Sensor (OCS)
		TYPE 3 (T3)	40W (40CLED)	4000K (40K)	347-480V (48)	WHITE (WH)	Button Photo Cell (PC)
		TYPE 4 (T4)	50W (50CLED)	5000K (50K)		BRONZE (BRZ)	Wireless controls (WC)
		TYPE 5 (T5)	60W (60CLED)			SILVER (SIL)	
			70W (70CLED)			GRAPHITE (GPH) MARINE GRADE (MG)	

Dimensions		
CAT#	A	B
CLP-5000	14" 3/8	26.00"

EPA	
CAT#	EPA
CLP-5000-SP	.85
CLP-5000-YA	.83

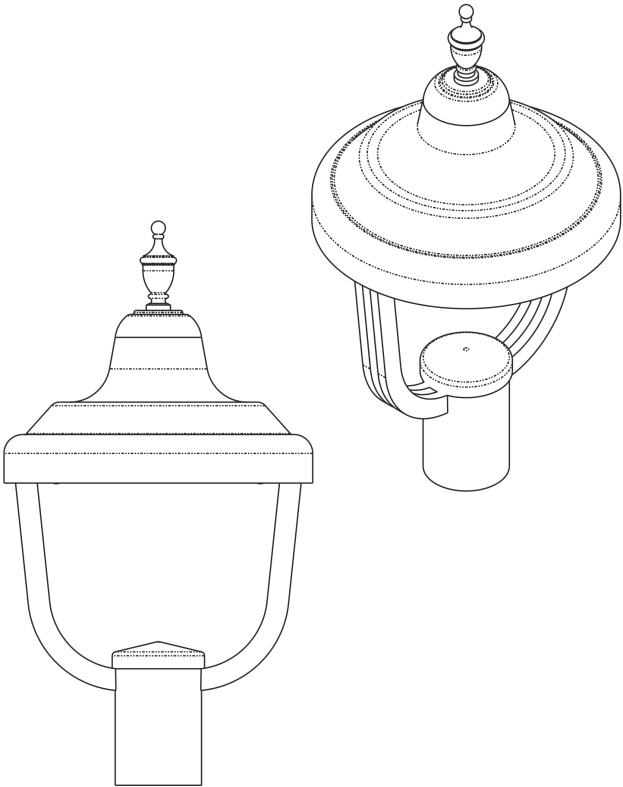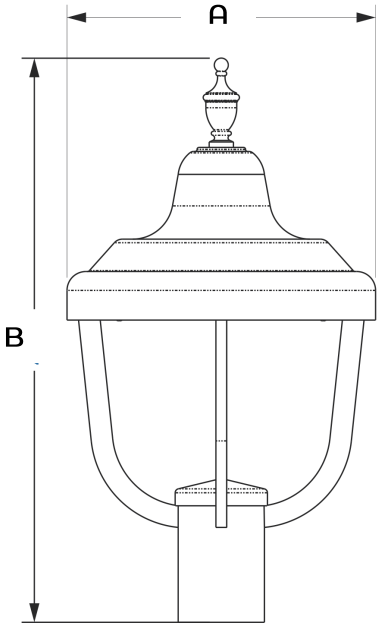

CLP-5000-YM

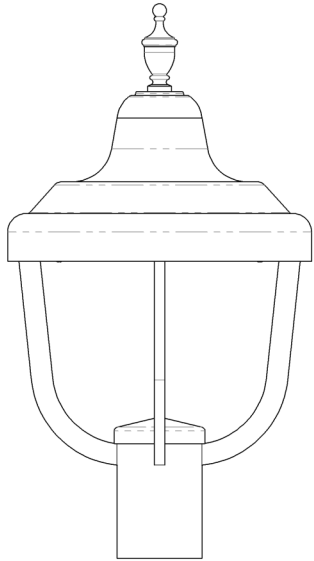

CLP-5000-SM

MODEL #	INPUT POWER	LUMEN OUTPUT	LP/W	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLP-5000-20CLED	25W	3,650	182	5000K	70+	>200,000	120-277V	50/60HZ	100w MH
CLP-5000-40CLED	45W	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ	150w HPS
CLP-5000-50CLED	55W	7,780	155	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
CLP-5000-60CLED	65W	8,539	142	5000K	70+	>200,000	120-277V	50/60HZ	250w PSMH
CLP-5000-70CLED	75W	9,986	142	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS



All products are proudly manufactured and/or assembled in the USA