

CLP-TC Series

Architectural LED Lighting
DESIGN -FUNCTION-QUALITY



**Crystal
Lighting** 

CLP-TC has an elegant design that adds style and class to any location. A few locations that this fixture is suitable for are: townships, parks, walkways, housing communities, and driveways. Internally, the CLP-TC is durable, reliable and designed to tolerate wet locations. -10 Year/100,000 hour limited warranty is included.

FEATURES

- Energy Savings: Over 60% compared to HID light sources
- Improved lumen maintenance.
- Manufactured with high efficient Lumiled® LED'S.
- Operating Temperatures: -30°C ~ 60°C.
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional).
- Suitable for wet locations.
- 0-10 Dimming, Occupancy Sensors, Photo Cell and Wireless Controls (Optional)
- 10Kv Surge Protector. (standard)
- Operating life: >200,000 hours

CONSTRUCTION.

- Housing is heavy-duty Cast Aluminum.
- 3 Mil. Powder Coating Finish.
- Frosted Acrylic Lens (Standard).
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Over 3" O.D Pole or Tenon (standard), Adapter is required for other mountings .




Example: (CLP-TC-50CLED-T5-30K-MV-BRZ-3R-WC)





CLP-TC							
CAT #	Wattage	Light Dist.	Color Temp.	Voltage	Color	Mounting	Options
CLP-TC	40W (40CLED) 50W (50CLED) 60W (60CLED) 100W (100CLED)	TYPE 2 (T2) TYPE 3 (T3) TYPE 4 (T4) TYPE 5 (T5)	3000K (30K) 4000K (40K) 5000K (50K)	120-277V (MV) 480V (HV)	Black (BLK) White (WH) Bronze (BRZ) Graphite (GPH) Marine Grade (MG) Custom (CST)	3" O.D (3R)	Button Photo Cell (PC) Wattage Adjuster (WA) House Side Shield (HSS) Opal Acrylic Lens (OAL) No Lens (NL)

Post Top

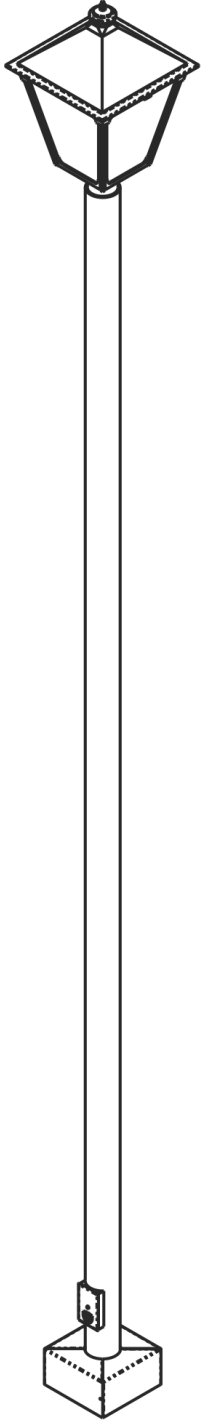


Arm Mount (D180)

DA7-180 (Optional)

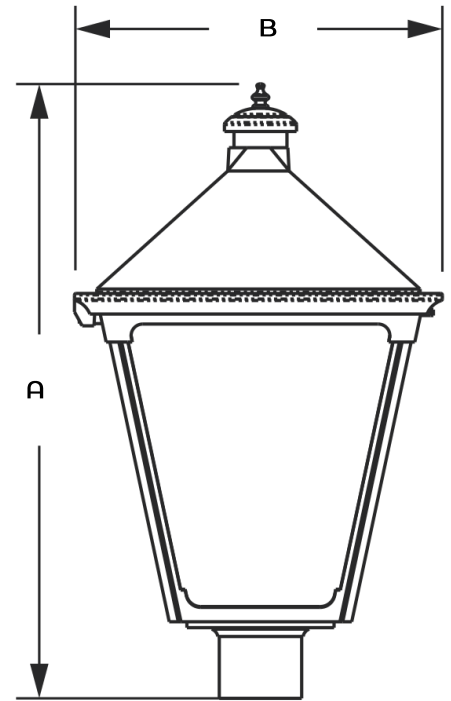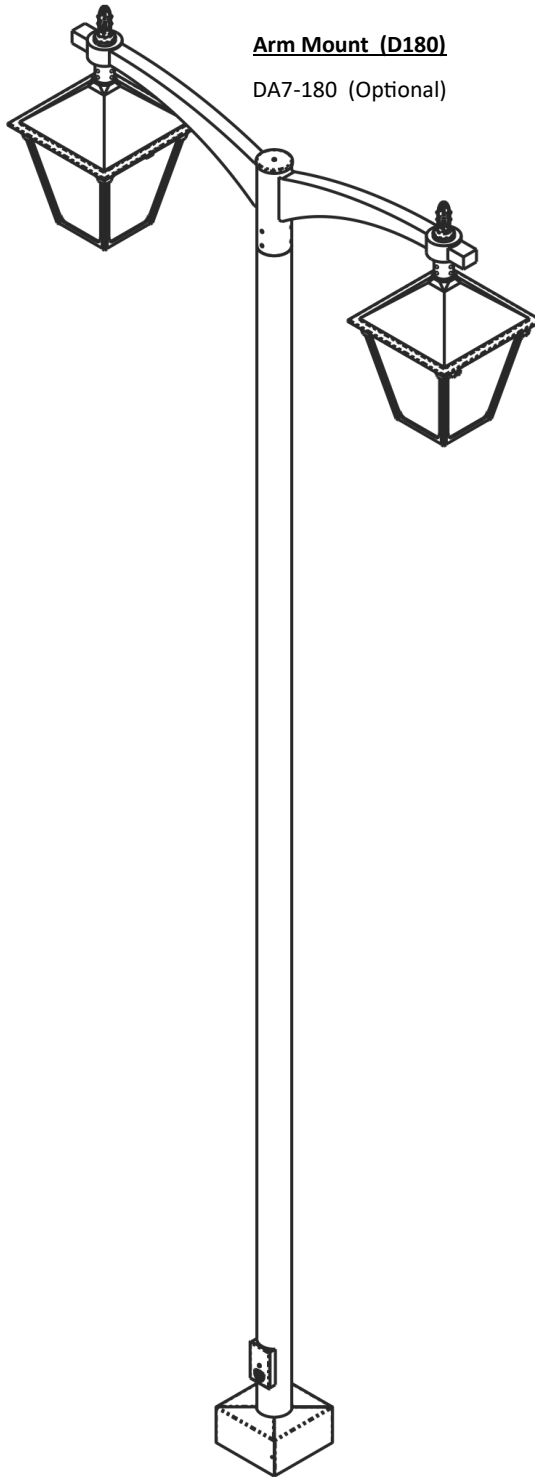

Dimensions

CAT#	A	B	EPA
CLP-TC	26"	15" 1/2	1.48

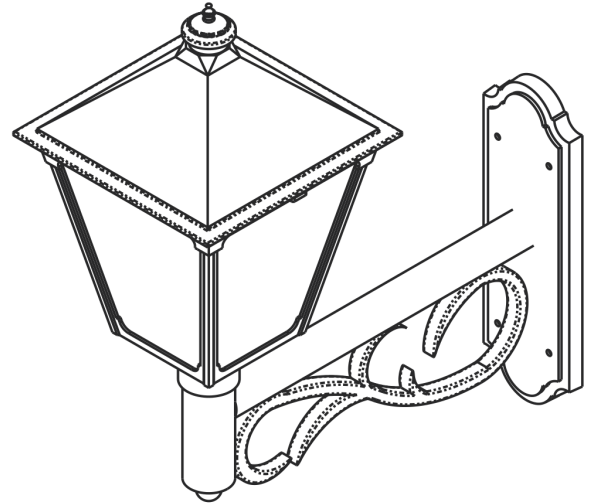

Wall Mount Arm

CLP-246B (Optional)

Cat#	Input Power	Lumen Output	LP/W	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	Input Frequency
CLP-TC-40CLED	40W	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ
CLP-TC-50CLED	50W	7,055	141	5000K	70+	>200,000	120-277V	50/60HZ
CLP-TC-60CLED	60W	8,466	141	5000K	70+	>200,000	120-277V	50/60HZ
CLP-TC-100CLED	100W	14,110	141	5000K	70+	>200,000	120-277V	50/60HZ