

**EROS**  
Area LED Lighting  
DESIGN-FUNCTION-QUALITY



*Crystal Lighting Corp.*






ERS-SA



ERS-EA6




ERS-SF

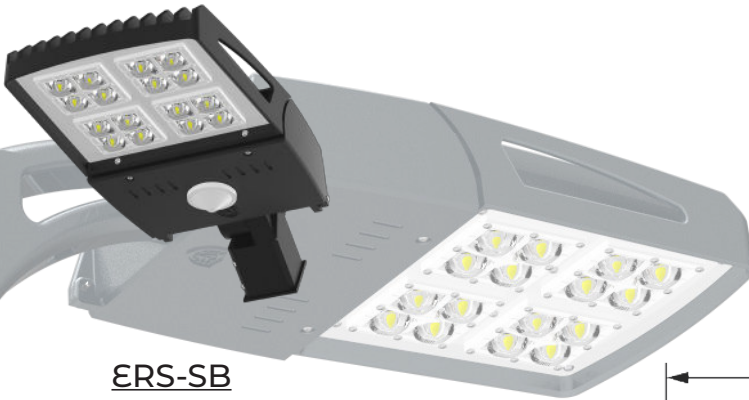

ERS-WM



ERS-SB

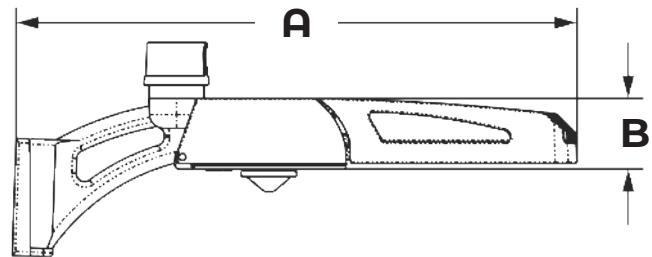

Dimensions			
Cat#	A	B	EPA
ERS-SA	25" 7/8	3" 1/4	.49
ERS-SF	24" 5/8	3" 1/4	.45
ERS-SB	22" 7/8	3" 1/4	.40

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	HID Equivalent	HID Equivalent
ERS-1M-20CLED	25W	3120	156	5000K	70+	>200,000	120-277V	50/60HZ	50W HPS
ERS-1M-40CLED	45W	5475	136	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
ERS-1M-50CLED	55W	6548	130	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
ERS-2M-80CLED	85W	10950	136	5000K	70+	>200,000	120-277V	50/60HZ	250W MH
ERS-2M-100CLED	105W	12,997	129	5000K	70+	>200,000	120-277V	50/60HZ	400W PSMH
ERS-3M-120CLED	125W	16426	136	5000K	70+	>200,000	120-277V	50/60HZ	400W HPS
ERS-3M-150CLED	155W	19526	130	5000K	70+	>200,000	120-277V	50/60HZ	40W HPS
ERS-4M-180CLED	185W	23974	133	5000K	70+	>200,000	120-277V	50/60HZ	750W MH
ERS-4M-200CLED	205W	25995	129	5000K	70+	>200,000	120-277V	50/60HZ	750W PS

Proudly Manufactured and Assembled in the USA