



Floodlight 45W/60W



Description

The LITELUME™ Floodlight (LL-FL) medium size is a high performance LED solution designed with versatility and a slim, low profile design. The rugged, die-cast aluminum housing with UV resistant powdercoat finish minimizes wind load requirements and features an integral, watertight LED driver compartment along with high performance aluminum heat sinks.

Applications: Parking lots, Auto dealerships, Billboard, Façade, Wall Washing, Landscape, and general outdoor lighting.

Fixture Information

Size:	45W/60W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Knuckle Mount Yoke Mount
Lens:	High Performance Acrylic NEMA 7H*6V optics
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

5,550 to 7,450 lm

Lumens Per Watt (typical):

130 to 133lm/W

CCT:

3000K
4000K
5000K

Beam Angle:

7H*6V

Lifespan:

Features Philip Lumileds with up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
IP66 rated







Dimension

Item	Width	Length	Height	Weight
Floodlight (45W) w/ Knuckle Mount	3.12"	7.95"	7.50"	2.932 lb
Floodlight (45W) w/ Yoke Mount	3.12"	8.47"	6.56"	3.527 lb
Floodlight (60W) w/ Knuckle Mount	3.12"	7.95"	7.50"	3.152 lb
Floodlight (60W) w/ Yoke Mount	3.12"	8.47"	6.56"	3.748 lb

Knuckle Mount

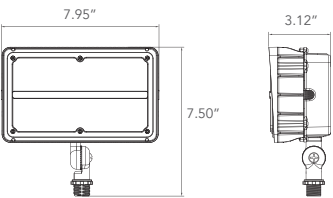

Yoke Mount

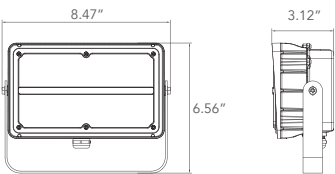


Mounting Options



Knuckle Mount- Die-cast aluminum knuckle provides flexibility in mounting from a variety of areas.

Yoke Mount- Die-cast aluminum yoke is easily adapted to many surfaces and allows easy fixture aiming angles.

Photometrics
15W

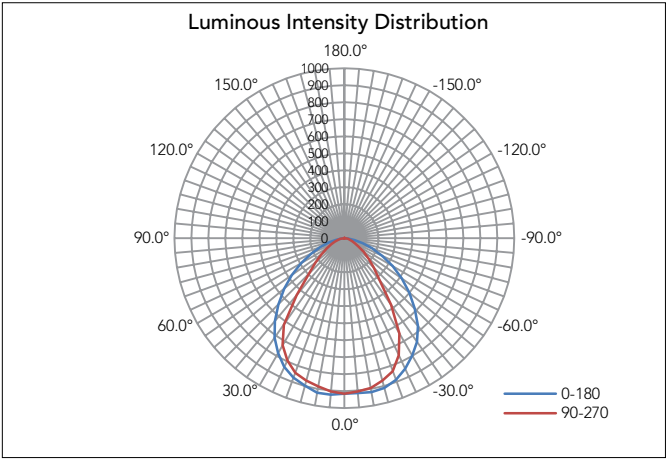

27W

