


DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## LG-CLW-3032

## Large LED Flood light

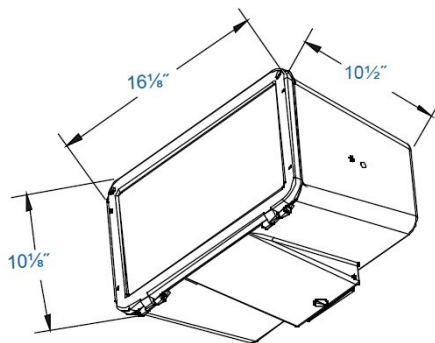

Large LED Flood light fixture, suitable for wet locations, Perfect for lighting up commercial landscape, walkways, entry ways, perimeters, school campuses, industrial/commercial spaces, sign lighter. This fixture has a wide rectangular light distribution. Comes with a 5 year/50,000 hour limited warranty.

### FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

### CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat **bronze finish (standard)** various colors available (custom).
- Clear tempered glass lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Several mounting options, see below

### OPTIONS

- (PC) Button photo cell
- (WG) Wire guard stainless steel
- (GS) Glare shield
- (SF) Slip fitter
- (SY) Small yoke
- (LY) Large yoke
- (TM) Pole tenon mount
- (PG) Polycarbonate guard
- (WC) Wireless Control

DESIGNLIGHTS  
CONSORTIUM

NEMA

Wireless Controls  
Available



PHILIPS  
LUMILEDS

Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent	DLC LISTED
LG-CLW-3032-20CLED	25W	2,750	4,530	5000K	70+	>200,000	120-277V	50/60HZ	100w MH	NO
LG-CLW-3032-54LED	56W	4,854	7,766	4000K	60+	>200,000	120-277V	50/60HZ	175w MH	YES
LG-CLW-3032-60CLED	65W	8,256	13,622	5000K	70+	>200,000	120-277V	50/60HZ	250w PSMH	NO
LG-CLW-3032-80CLED	85W	11,008	18,163	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS	NO
LG-CLW-3032-100CLED	105W	13,760	22,704	5000K	70+	>200,000	120-277V	50/60HZ	400w PSMH	PENDING

### Ordering Guide

Example: (LG-CLW-3032-40CLED-50-MV-BZ-SF)

LG-CLW-3032					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
LG-CLW-3032	20W-20CLED 54W-54LED 60W-60CLED 80W-80LED 100W-100CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	PC- BUTTON PHOTOCELL WG- WIRE GUARD GS- GLARE SHIELD SF- SLIP FITTER SY- SMALL YOKE LY- LARGE YOKE TM- POLE TENON MOUNT WC- WIRELESS CONTROL