



# Post Top Flat Round Luminaire



Adjustable to 25°, 45°, 70°, & 90°

## Description

The LITELUME™ Post Top Flat Round Luminaire (LL-PTFR) combines style, performance and adjustability. Featuring a die-cast aluminum housing with outstanding corrosion protection, and secondary UV resistant polycarbonate optics. The PTFR provides an aesthetically pleasing addition to any walkway, park, downtown corridor or parking lot with its steady well-defined construction. The highly functioning optics and adjustability provide maximum distribution to make the PTFR a premier choice for outdoor area lighting.

## Fixture Information

Size:	52W/77W
Housing:	Die-cast aluminum housing
Finish:	Protective powdercoat
Color:	Standard: Bronze
Mounting:	Tenon fits 2 - 2 7/8" standard OD
Power Factor:	>.95
CRI:	80
Surge Protector:	Complies with ICE61000-4-5, input transient surge protection (2-6kV)
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	5-Year Limited Warranty

## Performance Data

### Lumen Output:

6662 to 10025 lm

### Lumens Per Watt (typical):

126 to 130 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

Type V

### Lifespan:

Features Philips Lumileds with up to 174,000 running hours.

## Ratings & Certificates


UL Listed for wet locations  
IP65






## Dimensions

Item	Height	Diameter
Post Top Flat Round	20.6"	18"

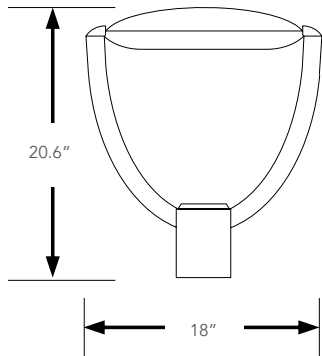


## Photometric Data

LL-PTFR-52-30-UNV-T5-BZ

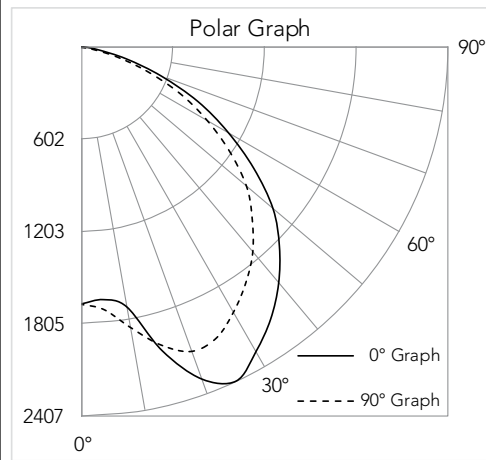

LL-PTFR-77-30-UNV-T5-BZ

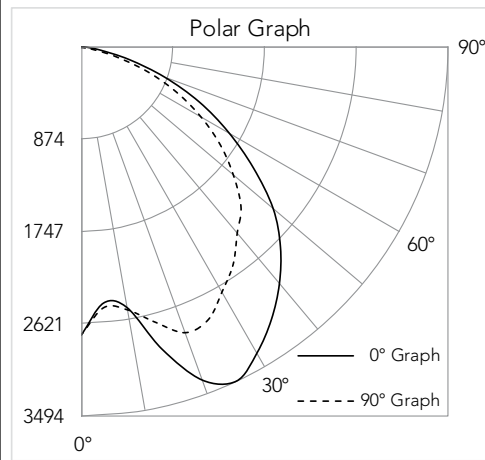



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-PTFR-52-50-UNV-T5-BZ	52	6887	5000	120-277	T5
LL-PTFR-52-40-UNV-T5-BZ	52	6785	4000	120-277	T5
LL-PTFR-52-30-UNV-T5-BZ	52	6662	3000	120-277	T5
LL-PTFR-77-50-UNV-T5-BZ	77	10025	5000	120-277	T5
LL-PTFR-77-40-UNV-T5-BZ	77	9883	4000	120-277	T5
LL-PTFR-77-30-UNV-T5-BZ	77	9713	3000	120-277	T5

\* Please contact LITELUME for all Custom Option Requests

## Accessories Ordering Information

Part #	Description
TLPC	Twist Lock Photocell 120-277V

\* Please contact LITELUME for all Custom Option Requests