




LED Tunnel Light-- B Series


Feature

- Low power consumption. More than 60% energy saving compared to conventional HID/HPS.
- Environmental friendly. Lead and mercury free.
- LED type: SMD3030 CRI : $\geq 75+$
- Input voltage(V): 85~265V AC or 110-277VAC, 50/60Hz at choice
- Project Beam: 78*132Degree
- LENS Degree: 60*60degree, 90*90degree, 60*150degree
- Frequency: 50~60Hz
- Light failure: $< 3\%$ within 3000Hrs
- Lifespan: $\geq 50,000$ hrs
- IP grade: IP65
- Humidity: 5 ~95% RH.
- Work temperature: $-20 \sim 55^{\circ}\text{C}$
- Store temperature: $-40 \sim 85^{\circ}\text{C}$
- Warranty: 3 years; Osram chip + China driver
- Warranty: 5 years; Osram & Philips chip + Meanwell driver



Light Distribution

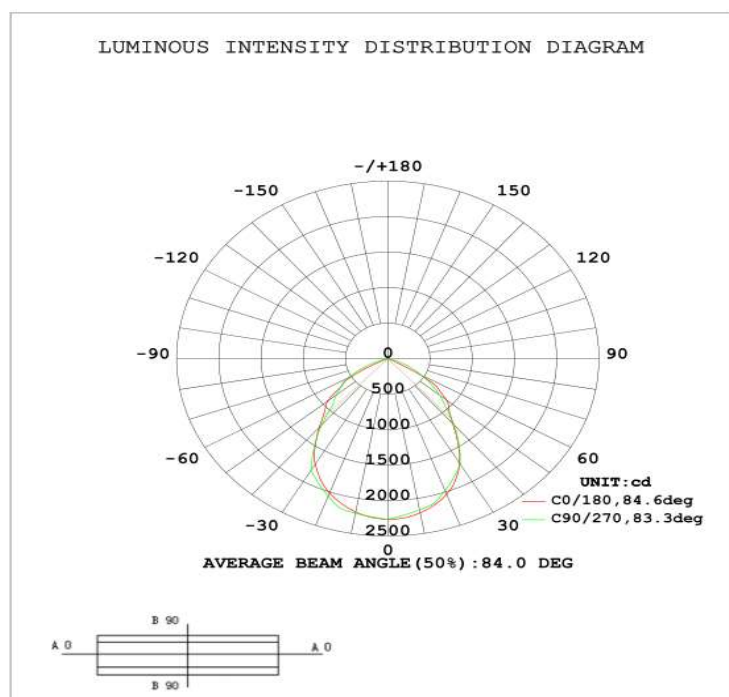

Light distribution curve


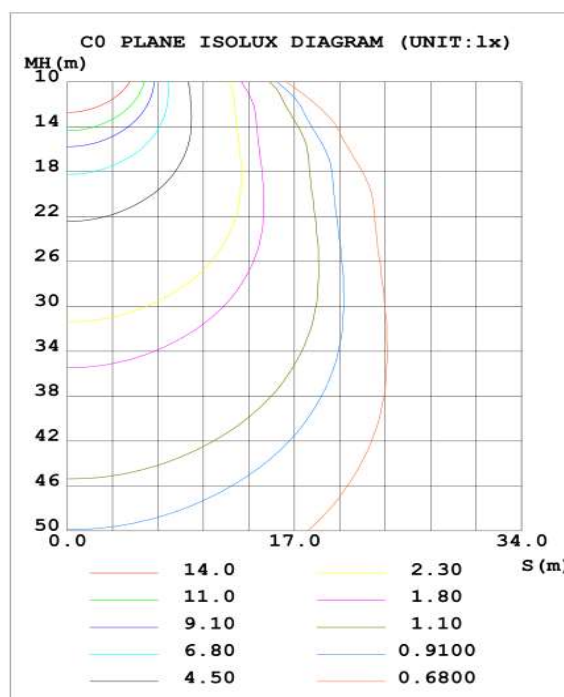


Average illumination curve

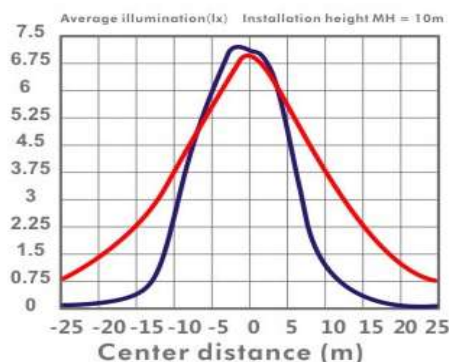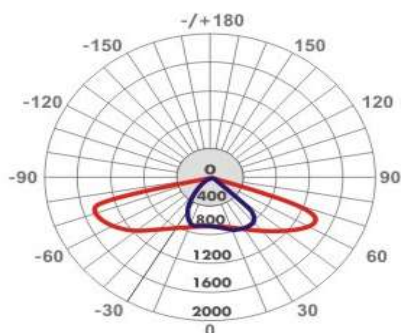

Advantage

TSTU-50B

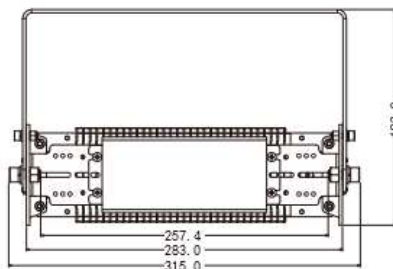

Power: 1*42pcs 3030



Weight: 3.5kg

Products Size: 315*193*129.2mm

Packing Size: 330×210×215mm

Packing Model: 2pcs/carton

TSTU-100B



Power: 2*42pcs 3030



Weight: 4.0kg

Products Size: 315*238*129.2mm

Packing Size: 340×250×160mm

Packing Model: 1pcs/carton

TSTU-150B



Power: 3*42pc 3030

Weight: 4.8kg


Products Size: 315*283*130mm

Packing Size: 340×300×160mm

Packing Model: 1pcs/carton

Products' picture and size

TSTU-200B

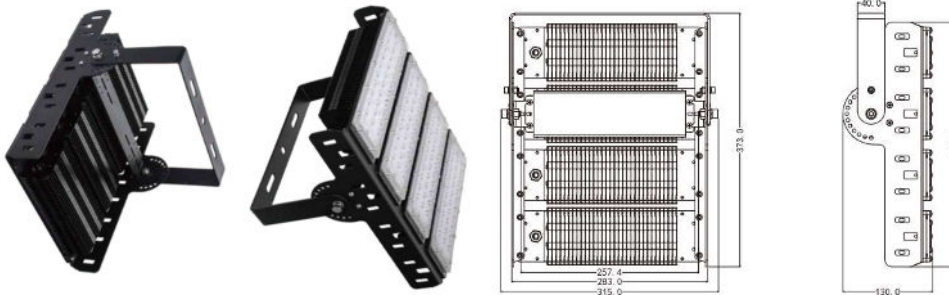

Power: 4*42pc 3030


Weight: 6.0kg

Products Size: 315*373*130mm

Packing Size: 390×340×160mm

Packing Model: 1pcs/carton

TSTU-300B

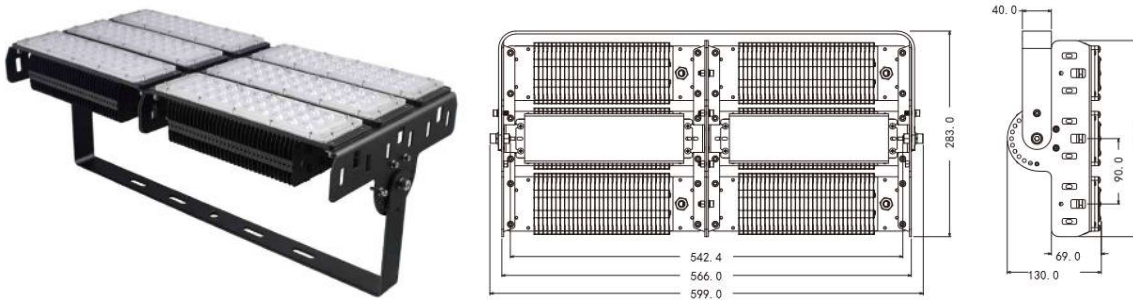

Power: 6*42pc 3030

Weight: 10.0kg

Products Size: 599*283*130mm

Packing Size: 630*320*160mm

Packing Model: 1pcs/carton

TSTU-400B



Power: 8*42pc 3030

Weight: 13.0kg

Products Size: 599*360*130mm

Packing Size: 635*430*180mm

Packing Model: 1pcs/carton