


DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

SM-CLC-2282

Industrial LED high bay light fixture

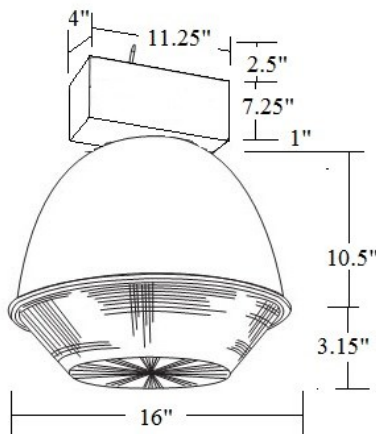

Industrial LED high bay fixture, suitable for dry locations, designed to mount on ceilings up to 20 ft. heights in factories, foundries, machines shops, warehouse, large retail stores, gymnasiums and indoor sport arenas. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for damp locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy duty aluminum material
- Comes with hook to hang from eye loops, chains, etc.
- Powder coat **white finish (standard)** various colors available (custom).
- Acrylic drip lenses available (**OPTIONAL**)
- Mounting: Hook to hang from ceiling

OPTIONS

- (OCC) Motion sensor
- (EMR) Emergency battery backup
- (GL) Glass Lens
- (PDL) Prismatic Drop Lens
- (CDL) Conical Drop Lens
- (3PC) 3 prong cord
- (L5-15P) 120v twist lock plug 3' cord
- (L6-15P) 240v twist lock plug 3' cord
- (L7-15P) 277v twist lock plug 3' cord



Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
SM-CLC-2282-50CLED	55W	6,890	11,024	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
SM-CLC-2282-75CLED	80W	9,590	15,344	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS

Ordering Guide Example: (SM-CLC-2282-50CLED-50-MV-WH-OCC)

SM-CLC-2282					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
SM-CLC-2282	50W-50CLED 75W-75CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480=480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	OCC- MOTION SENSOR EMR- EMR BATTERY PDL- Prismatic drop lens CDL- Conical drop lens 3PC- 3 prong cord L5-15P- 120v twist lock plug 3' cord L6-15P- 240v twist lock plug 3' cord L7-15P- 277v twist lock plug 3' cord