



**POLES & LIGHTING**

**AVPL-RTA-20'-40' • ROUND TAPERED ALUMINUM SERIES • .250 WALL THICKNESS**

**ALUMINUM POLE SPECIFICATIONS:**

**SHAFT:** One-piece extruded 6063-T6 aluminum tapered alloy tube treated T6 temper. Available in .125, .188, .226 and .250 wall thickness.

**ANCHOR BASE:** Cast from A356 aluminum alloy and heat treated to T6 temper. Base plate and shaft are circumferentially welded top and bottom. The anchor base is provided with slotted holes.

**ANCHOR BOLTS:** Fabricated from carbon steel bar with minimum-yield. Strength of 55,000 PSI. Galvanized, per ASTM A-153. Each anchor bolt is furnished with two hex nuts and two flat washers.

**BASE BOLT COVER:** Two-piece standard full base cover is fabricated from heavy gauge quality carbon steel and pretreated with corrosion inhibitors. Provided with S304 stainless steel hardware. Spun and cast aluminum covers are available.



**GROUNDING:** Provision; 3/8-16 Threaded stud welded to inner shaft wall opposite hand hole. Flat washer and hex nut provided.

**HAND HOLE:** Reinforced 3" x 5" hand hole is located 18" above base. Cover and attachment hardware provided. Location at 90 deg. from drilling.


**HARDWARE:** S304 stainless steel

**TOP CAP:** Removable top cap provided with drill-mount poles.


**FINISH:** TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pretreatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

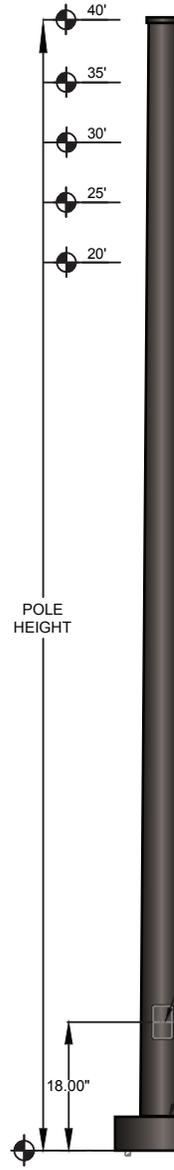


**DRILLED MOUNT STYLES**



**TENON MOUNT STYLES**



**ANCHOR BOLT**  
MINIMUM.....3 1/2"  
MAXIMUM.....3 3/4"



**AL-6 TEMPLATE**  
11.75 X 11.75 X 1.00 ANCHOR PLATE  
13.00" DIA. BOLT CIRCLE

POLE DIMENSIONS				
POLE HEIGHT	TOP DIA. SIZE (in.)	BOTTOM DIA. SIZE (in.)	GAUGE	MOUNTING HEIGHT (ft.)
Per Pole Schedule	SEE SCHEDULE	SEE SCHEDULE	.250	Per Pole Height

BASE PLATE DIMENSIONS			
BOLT CIRCLE (in.)	BASE PLATE DIM. (in.)	BOLT HOLE (in.)	PLATE THICKNESS (in.)
Per Pole Schedule	11.75 sq.	Per Schedule	1.00

ANCHOR BOLT DIMENSIONS		ALLOWABLE WIND LOADING*
ANCHOR BOLT DIA. (in.)	ANCHOR BOLT LENGTH (in.)	
1.00	Per Schedule	Calculations are based on sustained Wind forces plus additional 1.3 wind gust. *SQ.FT

MAXIMUM EPA - SQ. FT.					
CATALOG NUMBER	MAX. FIXT. WT.	100 MPH	90 MPH	80 MPH	70 MPH
2064-250	200	5.8	7.7	10.3	14.4
2574-250	225	5.9	7.5	9.7	13.8
3084-250	200	5.8	7.6	10.1	13.7
3584-250	100	4.0	5.3	7.2	9.5
4084-250	200	4.4	5.6	7.8	10.7

**STANDARD COLORS AND FINISHES**



OTHER COLORS AND FINISHES AVAILABLE - SEE ACCESSORIES CUTSHEET.

RTA POLES	CATALOG NO.	POLE SCHEDULE					MOUNTING OPTIONS					FINISH
		AVPL-RTA-20-40 ROUND TAPERED ALUMINUM SERIES					1@90°	2@180°	2@90°	3@90°	4@90°	
		POLE HEIGHT	SHAFT SIZE	WALL GAUGE	BOLT CIRCLE	ANCHORAGE	○	○=○	○=○	○=○	○=○	
	2064-250	20'	6" X 4"	.250	13"	1" X 36" X 4"	DRILLED DM19 (1@90°) DM28 (2@180°) DM29 (2@90°) DM39 (3@90°) DM49 (4@90°)	TENON PT23 (2-3/8" O.D. x 4") PT27 (2-7/8" O.D. x 4") OTHER (SPECIFY):	ARM STYLE SPECIFY (SEE ARM CUTSHEET SPECS)	STANDARD: DBZ BLK WHT GRY GRN  OPTION: GALV		
	2574-250	25'	7" X 4"	.250	13"	1" X 36" X 4"						
	3084-250	30'	8" X 4"	.250	13"	1" X 36" X 4"						
	3584-250	35'	8" X 4"	.250	13"	1" X 36" X 4"						
	4084-250	40'	8" X 4"	.250	13"	1" X 36" X 4"						

ORDER LOGIC:	SERIES	POLE HEIGHT	SHAFT SIZE	WALL GAUGE	BOLT CIRCLE	MOUNTING OPTIONS:	ARM STYLE	FINISH
EXAMPLE: AVPL-RTA-30-84-250-DM19-XX-DBZ-XX	AVPL-RTA	-	-	250	-	DRILLED / TENON	-	-