

T8U-IDFH11-1800-L-EBA-01

LED T8 Bypass U-Bend Tube

Project Name:	Notes:	Date:	Туре:

DESCRIPTION

Looking for that hard-to-find LED U-Bend tube? Portor Industry has it! Our 6" gap U-bend tubes are made from high-quality glass and feature incredible lumen output.

Ideal use for office spaces, warehouses, hotels, restaurants, and schools.



CONSTRUCTION

Glass tubes with polycarbonate connectors.

ELECTRICAL

T8 Type B (ballast bypass), AC line input. Single-ended wiring. Luminaire is built with quality 100-277VAC internal drivers.

RETROFIT EASILY

Bypass the ballast and save on energy use. Produces uniform light output that is consistent from end-to-end.

DIMMING

Non-dimmable and not compatible with ballast.

CERTIFICATION


UL Listed, FCC, RoHS, CE







DIMENSION

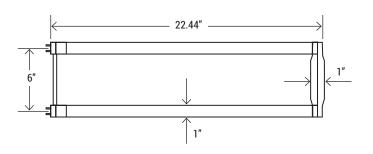

TECHNICAL SPECIFICATION

WATTAGE	15W			
LUMENS	1,800 lumens			
EFFICACY	120 lm/W			
VOLTAGE	AC100-277V			
POWER FREQUENCY	50/60 Hz			
CCT	5000K			
CRI	Ra>80			
BEAM ANGLE	360°			
LENS TYPE	Frosted			
WORKING TEMP.	-40°F - +122°F			
STORAGE TEMP.	-40°F - +158°F			
IP RATING	IP40 Suitable for damp locations			
DIMMABLE	Non-dimmable			
POWER FACTOR	>0.9			
THD	≤20%			
WARRANTY	5 year limited			
PORTOR CAT#	PT-UBT-6INB/15W-5K-F			

MODEL NUMBER(S)							
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE	
T8U-IDFH11-1800-L-EBA-01	15W	1,800	120	5000K	>80	AC 100/277V	

