


WPMP Mini Wall Pack

Outdoor

The Mini Wall Pack is a robust retrofit that outperforms outdated wall mounted HID fixtures. This addition to ATG's premium line of perimeter lighting products is typically found within parking structures or along main buildings, providing safety lighting for pedestrians and drivers.



Luminaire	Mini Wall Pack	Type
Project		
Product		
Notes		

Features

- Built from die-cast aluminum
- IP65 Silicon Gasket
- Built from Polycarbonate Lens
- Safety Mechanism against accidental closing



Order Format

Sample: WPMP-12-40

Series	Wattage	CCT	Voltage	Dimming	Lens	Finish Color
WPMP =Wall Pack Mini	12=12W 24=24W	40=4000K 50=5000K	Blank=100-277V	Blank=1-10V Dimming ND=Non-Dimming	Blank=Clear F=Frosted	Blank=Bronze

Application

The Mini Wall Pack is typically found within parking structures or along main buildings, providing safety lighting.



Construction

The robust design of the Mini is precision manufactured from Die-cast aluminum. It is available with clear or frosted polycarbonate lens.

Electrical

12W AND 24W models are available for the Mini Wall Pack. The calculated L70 lifespan of this fixture is greater than 50,000 hours with a standard input of 120-277VAC.

Optics

Color accuracy is rated at 80+ CRI, in a color temperature of 4000K and 5000K.

Certifications

- DLC Premium
- RoHS
- UL listed
- CE
- Title 24
- IP65 rated

Input Voltage (VAC)	120-277
CRI	80+
CCT(K)	4000, 5000
PF	>.95
THD	<15%
L70 (Hours)	>50,000
Color	Bronze Powdercoat
Housing	Injection Die-Cast Aluminum
Lens Material	PC Plastic Diffuser
Lens Type	Frosted, Clear
Temperature Range	-40°C to 40°C
Warranty	10 Years


Lumen Data

Wattage (W)	4K		5K	
	Efficacy (Lm/W)	Lumens (Lm)	Efficacy (Lm/W)	Lumens (Lm)
12W	123	1,476	125	1,500
24W	119	2,856	121	2,904

Bug Rating	
4K	B1-U3-G2
5K	B1-U3-G2

Dimensions

12W
24W

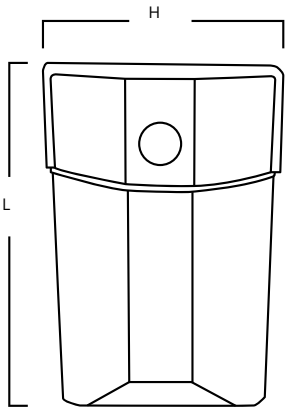


Part No.	Length (L)	Height(W)	Width(W)
WPMP-12	8.3"	5.5"	3.5"
WPMP-24	8.3"	5.5"	3.5"


Recorded in inches

Photometric

60-100W
Replacement

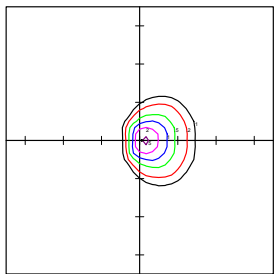


WPMP-12-50K@10'
Replaces 60W-100W

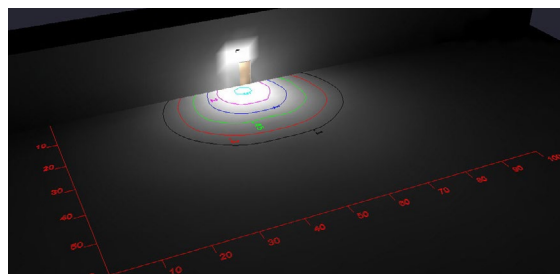


WPMP-12-50K@10'
Replaces 60W-100W

Photometric


**60-100W
Replacement**

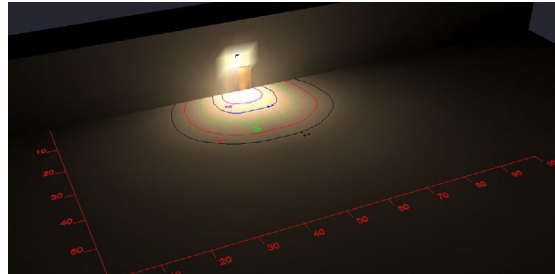


WPMP-12-40K@10'
Replaces 60W-100W

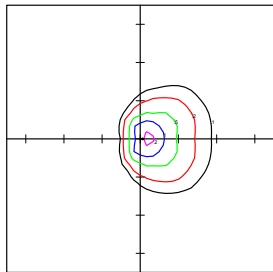


WPMP-12-50K@16'
Replaces 60W-100W

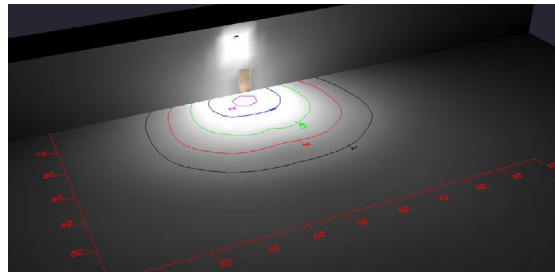


WPMP-12-50K@16'
Replaces 60W-100W

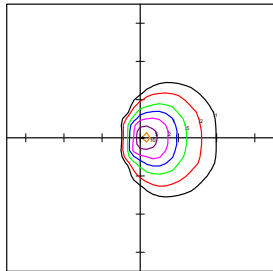


WPMP-24-50K@10'
Replaces 60W-100W

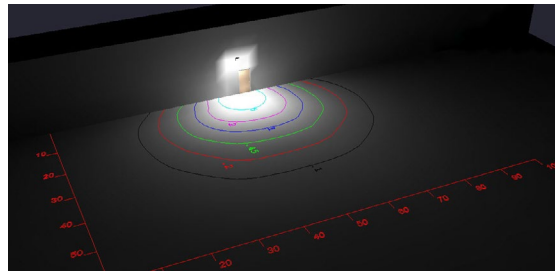

WPMP-24-50K@10'
Replaces 60W-100W

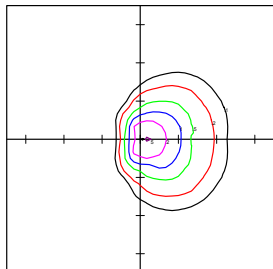

WPMP-24-50K@16'
Replaces 60W-100W

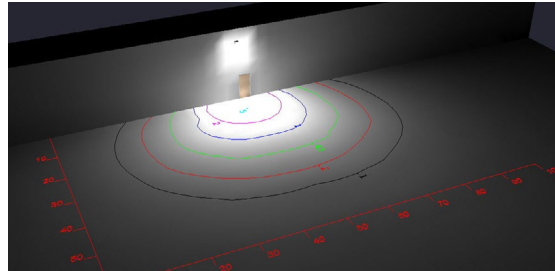

WPMP-24-50K@16'
Replaces 60W-100W