



All products are proudly manufactured and/or assembled in the USA

RLM Series

LED Architectural Fixture

DESIGN - QUALITY



RLM Series Architectural LED Fixture




RLM Shades are made from Spun 0.080 High purity aluminum. Wall arms are formed 1/2 and 3/4 NPT aluminum pipe.

Finish
Powder-Coat, Variety of standard and custom finishes are available.


- Features.**
- 0-10 Volt Dimming
 - Driver: Constant current, 120-277v, 50/60Hz, 480v (optional)
 - 10 Year Warranty
 - Suitable for wet locations

Shade Dimensions		
CAT#	D	H
CLA-SH1	16"	9" 1/2
CLA-SH2	18"	9"1/2
BRN-SH1	16"	9"



CAT #	SHADE DIAMETER	WATTAGE	DRIVER	CCT	FINISH	MOUNTING OPTIONS
CLASSIC (CLA) -----	16"SHADE 1 (SH1)	10W - 1376Lms (10)	MULTI-VOLT (MV) 480V (48)	3000K - 70CRI (307)	Aluminum	<u>Pole Mount</u>
	18"SHADE 2 (SH2)	20W - 2752Lms (20)		3000K - 80CRI (308)	BLACK (BLK)	ARM1 (A1)
BARN (BRN) -----	16" SHADE 1 (SH1)	30W -4128Lms (30)		4000K - 70CRI (407)	WHITE (WH)	<u>Wall Mount</u>
	9"1/2 SHADE 1 (SH1)			4000K - 80CRI (408)	BRONZE (BRZ)	ARM2 (A2)
SLANTED (SLD)				5000K - 70CRI (507)	SILVER (SIL)	ARM3 (A3)
				5000K - 80CRI (508)	MARINE GRADE (MG)	ARM4 (A4)
					Steel	ARM5 (A5)
					GALVANIZED (GVZ)	ARM6 (A6)
						ARM7 (A7)
						<u>STEM (ST)</u>
						Or
						<u>CORD (CR)</u>
						6" (6)
						12" (12)
						18" (18)
						24" (24)
						CUSTOM (CST)

RLM Series

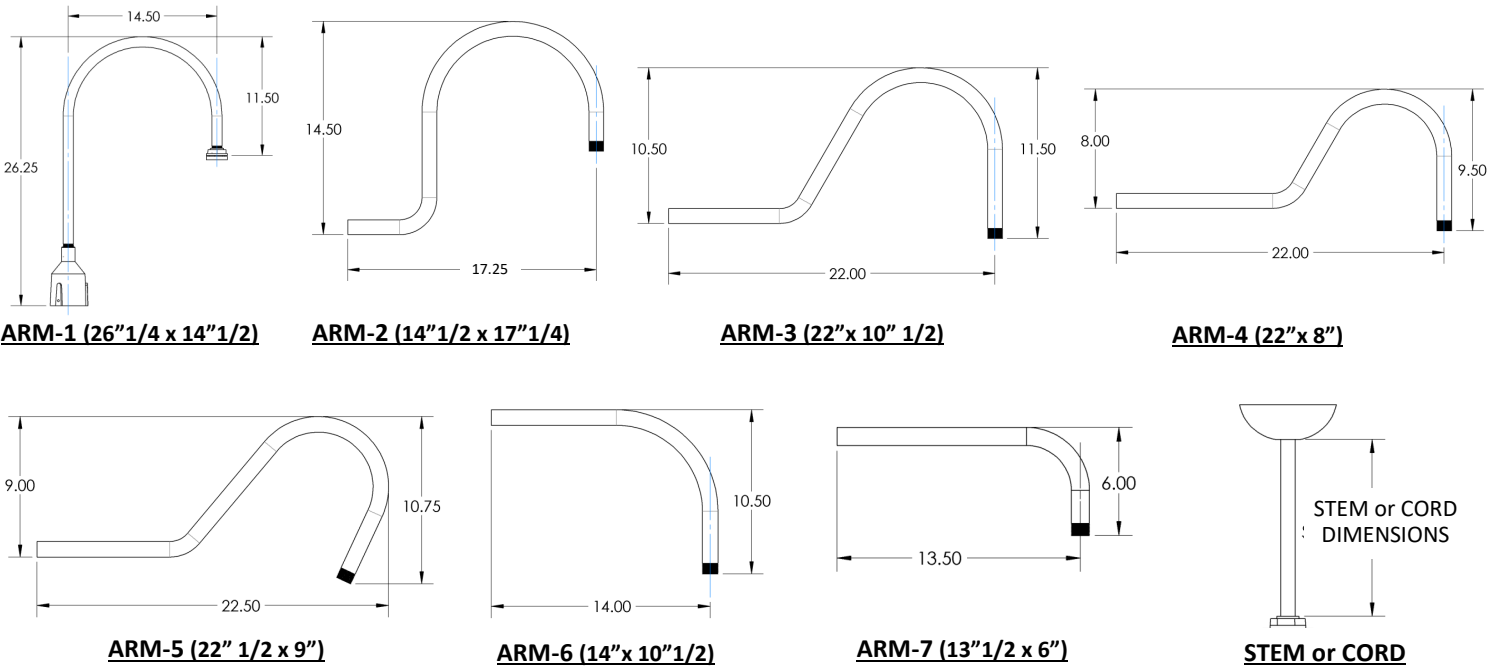

CLASSIC




BARN




SLANTED

DISTRIBUTION

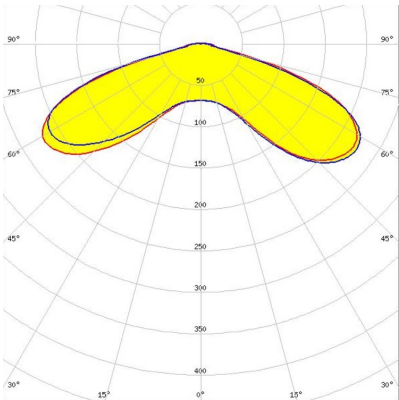

TYPE 5

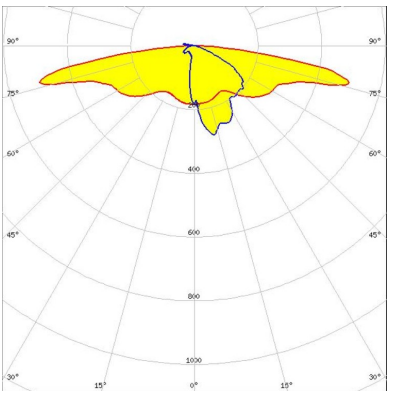

TYPE 3