


## Model Number


LS-HHBC400W

LS-HHBC500W

LS-HHBC600W

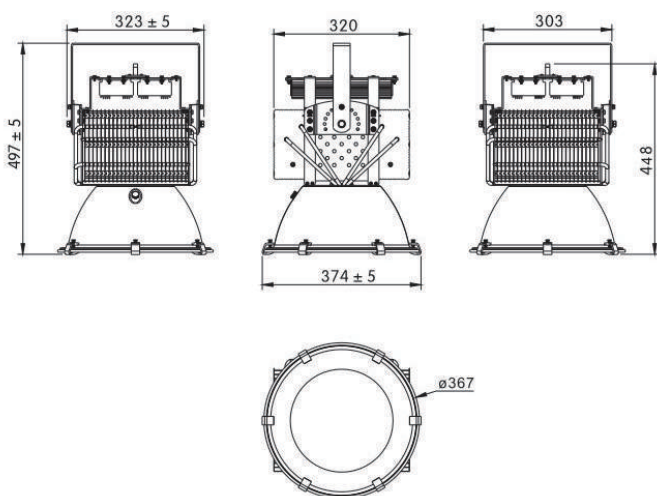

LS-HHBC400W

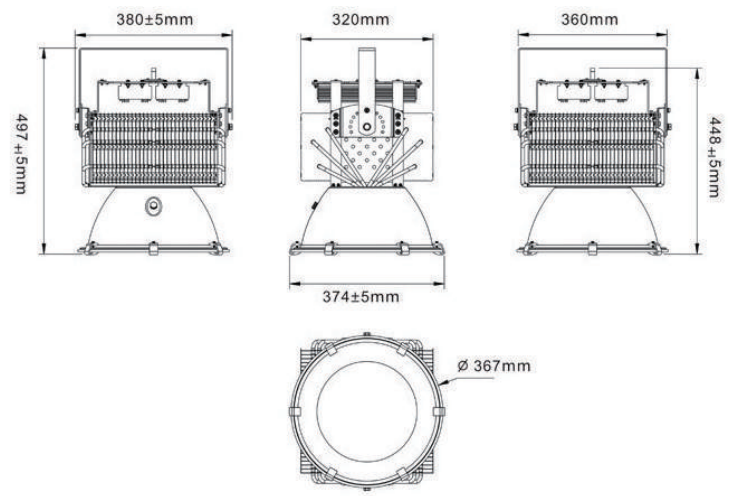


LS-HHBC500W/600W


# Luminous Intensity Distribution(C)

UNIT:cd  
 — V 0.0DEG PLAN  
 — H 0.0DEG PLAN


BeamAngle(50%):85.0 Deg  
 BeamAngle(10%):105.0 Deg

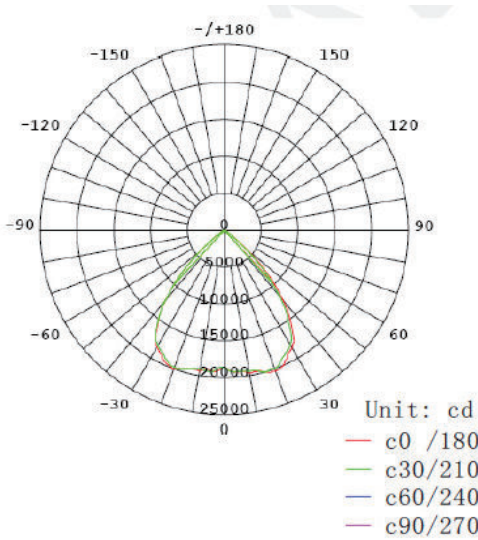

LS-HHBC400W

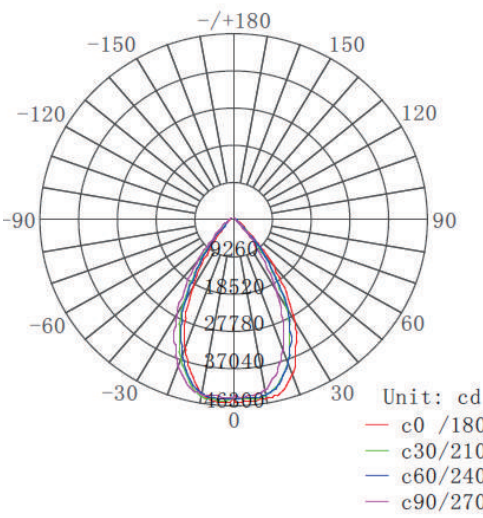

LS-HHBC500W

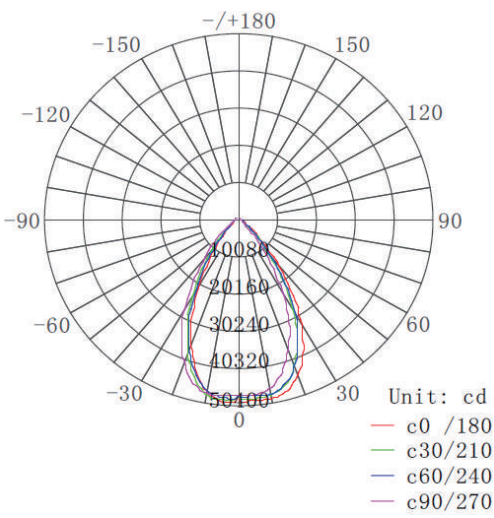

LS-HHBC600W

## Main Parameters

| Model#              | LS-HHBC400W                       | LS-HHBC500W | LS-HHBC600W |
|---------------------|-----------------------------------|-------------|-------------|
| Power               | 400W                              | 500W        | 600W        |
| Output Lumen        | 36000lm                           | 45000lm     | 54000lm     |
| Certificate         | DLC CE RoHS                       |             |             |
| Voltage             | 90~277VAC (180V-528VAC available) |             |             |
| LED/Driver brand    | CREE XML LED/MEAN WELL Driver     |             |             |
| Material            | Die-casting aluminum              |             |             |
| CCT                 | 3000K-6500K                       |             |             |
| Beam Angel          | 85Deg.(50%) 105Deg.(10%)          |             |             |
| PF                  | >0.9                              |             |             |
| CRI                 | ≥75                               |             |             |
| IP Rating           | IP65 Outdoor use                  |             |             |
| Working Temperature | -22°F ~140°F/-30℃~60℃             |             |             |
| Lifespan            | >50,000hrs                        |             |             |

## Applications

LED highbay lights are used in workshops, factories, warehouse, toll stations, gas stations, supermarket, exhibition halls, gymnasiums, etc..

