

CL-3099-SQ
Wall Pack LED Luminaire
DESIGN-FUNCTION-QUALITY



Crystal Lighting Corp.



CL-3099-S is a sleek, Versatile Cylinder Profile, 3 optional mountings Wall, Ceiling and Pendant Mount. **CL-3099-S** Architectural lighting solution for residential, hospitality and commercial spaces.


• 10 Year/100,000hrs Limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- 0-10 Dimming Driver, Occupancy Sensors, Photo Cell and Wireless Controls(Optional)
- Optics: 50°, 78° (6" Od and 8" OD)
- **Dark Sky Complaint** (Down Light Only / 3000K)

CONSTRUCTION


- Aluminum Heavy Gauge Housing
- Mounting: Wall Mount, Ceiling or Pendant Options
- Lens: Clear Acrylic Lens (Standard) See ordering guide for other Options

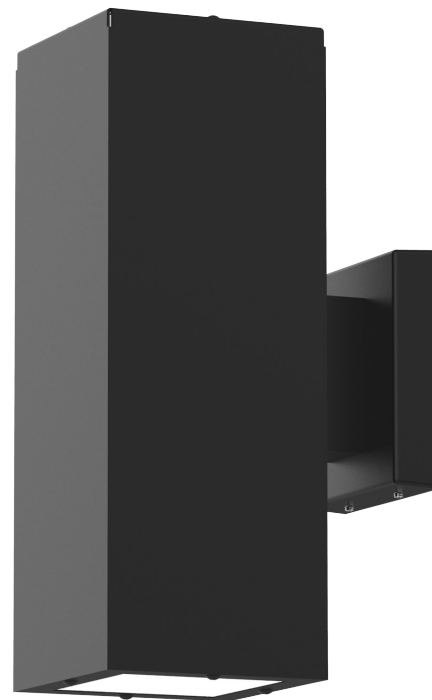


Example: CL-3099-8S-20CLEd-T2-40K-MV-BRZ-WM-OCC-EMR

CL-3099								
Cat #	Diameter	Light direction	Wattage	Color Temp.	Voltage	Color	Mounting	Options
CL-3099	4" SQ (4S) -----	Wall Mount Option Up/ Down Light (UDL)	12W (12CLEd)	3000K (30K)	120-277V (MV)	Black (BLK) White (WH) Bronze (BRZ) Silver (SIL) Graphite (GPH) Marine Grade (MG)	Wall Mount (WM)	Emergency Battery (EMR)
	6" SQ. (6S) -----	Down Light (DL)	15W (15CLEd) 20w (20CLEd)	4000K (40K) 5000K (50K)			Ceiling Mount (CM)	Button Photo Cell (PC)
	8" SQ. (8S)	Ceiling Mount Down Light (DL)	30W (30CLEd) 50W (50CLEd)				*Pendant Mount (PM) *Specify Stem Length	Wireless controls (WC)



CL-3099-4S




CL-3099-6S

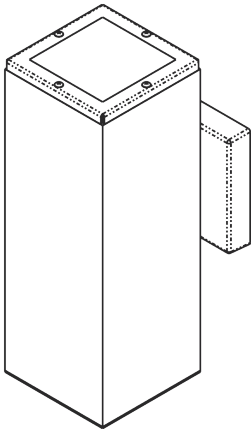

CL-3099-8S

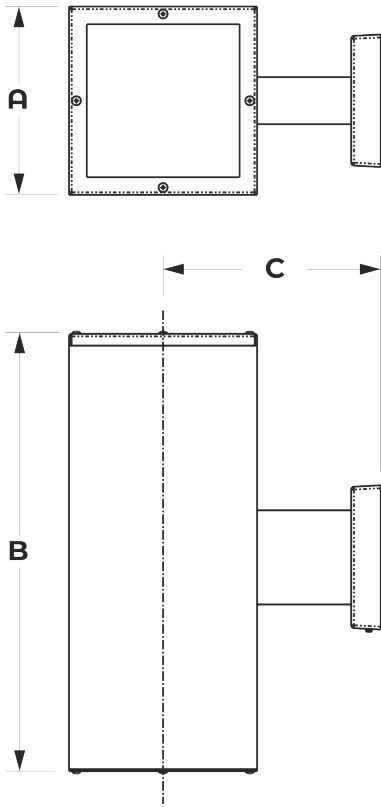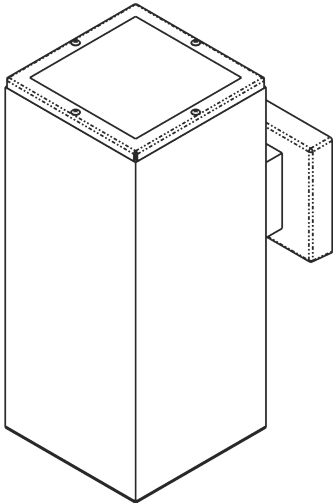

See Ordering
Guide

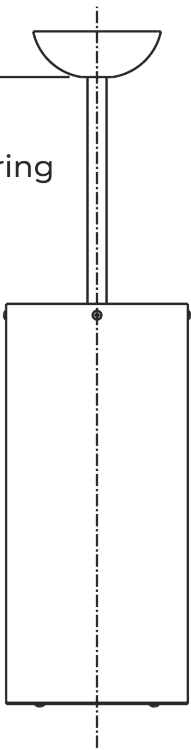

Dimensions			
Cat#	A	B	C
CL-3099-4S-WM	4" SQ	12"	5"
CL-3099-4S-CM	4" SQ	12"	n/A
CL-3099-6S-WM	6" SQ	16"	6" 1/8
CL-3099-6S-CM	6" SQ	16"	n/A
CL-3099-8S-WM	8" SQ	18"	9" 1/4
CL-3099-8S-CM	8" SQ	18"	n/A

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	HID Equivalent	HID Equivalent
CLP-3099-4S-12CLED	18W	1,348	112	5000K	70+	>200,000	120-277V	50/60HZ	70W MH
CLP-3099-6S-15CLED	20W	1,744	116	5000K	70+	>200,000	120-277V	50/60HZ	100W HPS
CLP-3099-6S-20CLED	25W	2,230	111	5000K	70+	>200,000	120-277V	50/60HZ	100W PSMH
CLP-3099-8S-35CLED	35W	4,388	125	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3099-8S-50CLED	55W	6,120	122	5000K	70+	>200,000	120-277V	50/60HZ	175W MH