


CLP-3099 Series

LED Ceiling / Wall Mount
DESIGN - QUALITY

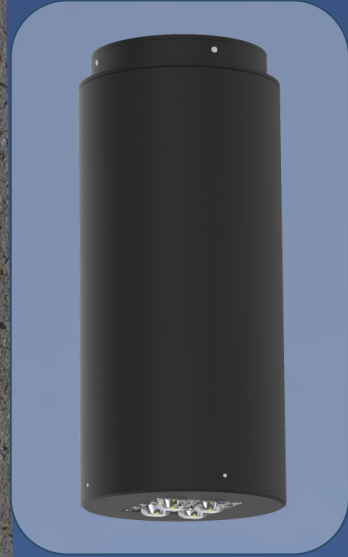

Crystal 
Lighting

CLP-3099

LED Ceiling / Wall Mount

CLP-3099 is a sleek, Versatile Cylinder Profile, 3 optional mountings Wall, Ceiling and Pendant Mount. CLP-3099 Architectural lighting solution for residential, hospitality and commercial spaces.


10 Year/100,000hrs warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Optics: 50°, 78° (6" Od and 8" OD)

CONSTRUCTION

- Aluminum Heavy Gauge Housing
- Mounting: Wall Mount, Ceiling or Pendant Options
- Lens options: Type 5 Optic 6" and 8" O.D (Standard) / 4" OD Clear Acrylic Lens (Standard)

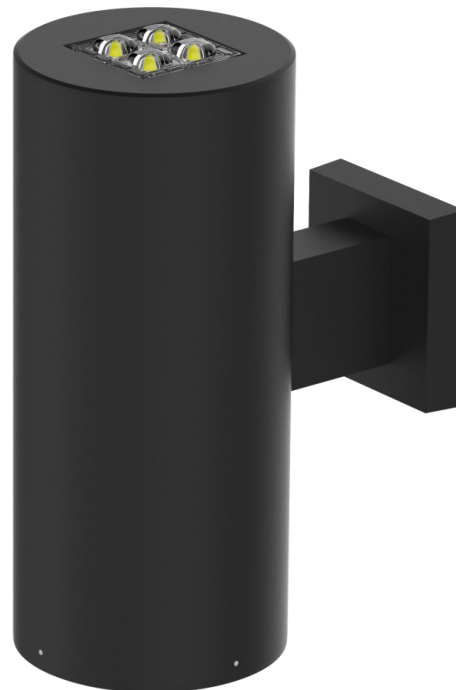

OPTICS


- VANDAL PROOF
- HIGH PERFORMANCE




Example: CLP-3099-8OD-UD-50W-4K-MV-BLK-WM-PC

CAT #	DIAM.	LIGHT DIRECTION	WATTAGE	COLOR TEMP	VOLTAGE	COLOR	mounting	OPTIONS
CLP-3099	4" OD (4OD)	Wall Mount Option UP/ DOWN (UD) DOWN (D)	12W (12CLED)	3000K (3K)	120-277V (mv)	BRONZE (BZ)	*WALL MOUNT (wm)	PHOTO CELL (PC)
	6" OD (6OD)		15W (15CLED)	4000K (4K)		GRAY (GRY)	CEILING MOUNT (cm)	Clear Glass (CG)
	8" OD (8OD)	Ceiling Mount DOWN (D)	20w (20CLED)	5000K (5K)		BLACK (BLK)	**PENDANT MOUNT (pm)	
			30W (30CLED) 50W (50CLED)			WHITE (WH) CUSTOM (CST)	**SPECIFY STEM LENGTH	



CLP-3099-8"OD

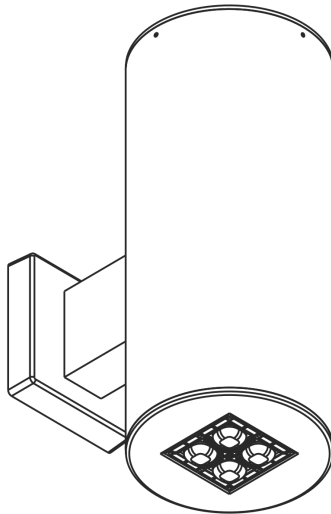

CLP-3099-6"OD

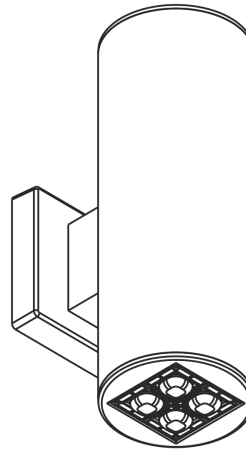


CLP-3099-4"OD

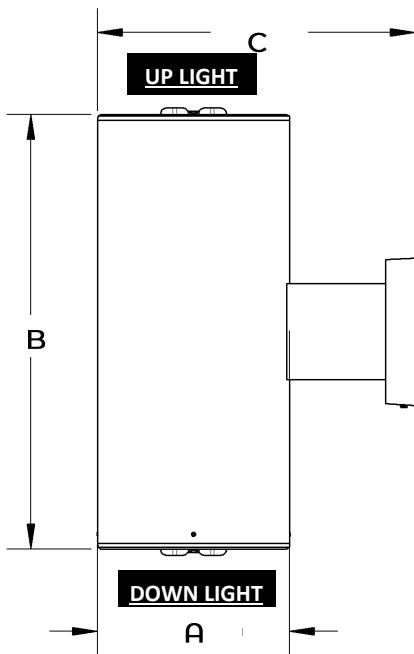

WALL MOUNT
UP&DOWN LIGHT

****PENDANT MOUNT**
Specify Stem or Cord Length

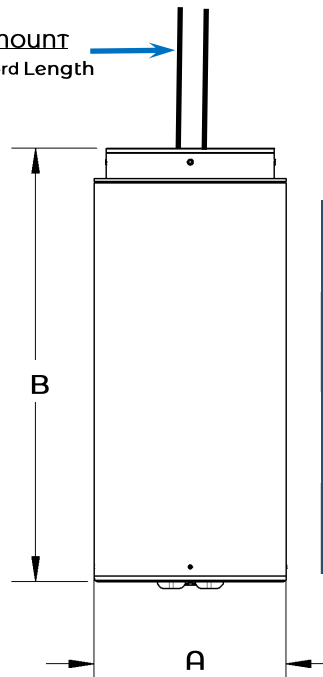

CEILING MOUNT

Dimensions			
CAT#	A	B	C
CLP-3099-4OD-WM	4" OD	12"	7"
CLP-3099-4OD-CM	4" OD	12"	n/A
CLP-3099-6OD-WM	6" OD	16"	9" 1/8
CLP-3099-6OD-CM	6" OD	16"	n/A
CLP-3099-8OD-WM	8" OD	18"	13" 1/4
CLP-3099-8OD-CM	8" OD	18"	n/A

Cat #	Input Power	Lumen Output	LPW	Color Temp (CCT)	CRI	Rated Life (L70)	Input Voltage	Input Frequency	HID Equivalent
CLP-3099-4OD-12CLED	18W	1,348	112	5000K	70+	>200,000	120-277V	50/60HZ	70w MH
CLP-3099-6OD-15CLED	20W	1744	116	5000K	70+	>200,000	120-277V	50/60HZ	100w HPS
CLP-3099-6OD-20CLED	25W	2230	111	5000K	70+	>200,000	120-277V	50/60HZ	100w PSMH
CLP-3099-8OD-35CLED	40W	4388	125	5000K	70+	>200,000	120-277V	50/60HZ	150w HPS
CLP-3099-8OD-50CLED	55W	6120	122	5000K	70+	>200,000	120-277V	50/60HZ	175W MH