



DAISY14

LED Ceiling Mount Lighting

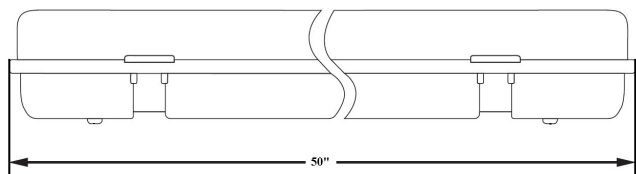

DAISY14 luminaire is vapor tight, water and dustproof. This fixture is build using high efficiency LED strips with a dimmable and programmable Phillips driver, Daisy 14 features an IP67 rated enclosure. Comes with standard stainless steal hardware, silicone seal and Polycarbonate frosted lens. Great for food processing facilities, Commercial kitchens, Breweries, Industrial facilities, Live-stock containment buildings, Parking Garages, Laundries, Car Washes, Underpasses, tunnels. Comes with a 10 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips lumileds LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- 0-10v dimming 80CRI (standard) up to 5000 lumen output
- Operating Life: >60,000 hours

CONSTRUCTION

- Gray polycarbonate body with stainless steel clips
- 1/2" rubber plugs for conduit, sensors or photo cell mounting.
- Gray polycarbonate fixture body
- Frosted polycarbonate lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Surface mount
- ETL Listed for Wet Locations



Cat#	INPUT-POWER	DELIV-ERED LU-MENS	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FRE-QUENCY	Fluorescent Equivalent	DLC LISTED
DAISY14-34LED	40W	4,120	5000K	85	>200,000	120-277V	50/60HZ	2-32w T8	NO
DAISY14-52LED	56W	5,545	5000K	85	>200,000	120-277V	50/60HZ	3-32w T8	YES

Example: (DAISY14-34LED-50-MV-OCC)

DAISY14				
MODEL	WATTS	COLOR TEMP	VOLTAGE	OPTIONS
DAISY14	34W-34LED	30-3000K	MV=120-277V	OCC- MOTION SENSOR
	52W-52LED	35-3500K		WC- Wireless controls
		40-4000K		EMR- EMR BATTERY
		50-5000K		PC- PHOTO CELL