




DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLA-3275

Small Architectural LED Area Light Fixture

The **CLA-3275** is a simple, yet elegant small architectural LED area light fixture that is suitable for wet locations. The **CLA-3275** is ideal for illuminating locations such as residential exteriors, walkways, perimeters, school campuses, industrial/commercial spaces, and any other location that is looking for an upgraded, vintage look. This fixture has a wide light distribution and is dark sky compliant. For the benefit of your investment, we have included a 10 year warranty.

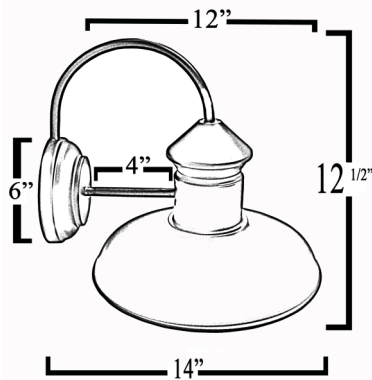

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- High efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- Powder coat: bronze finish (standard), various colors available (custom)
- Opal acrylic lens (standard), and other lens options available
- Silicone gasket to prevent leakage and provide weather-tight protection
- Mounts to a standard wall mount 4-inch junction box

OPTIONS

- (OCC) Motion sensor
- (PC) Button photo cell
- (WC) Wireless controls
- (PG) Prismatic glass

PHILIPS LUMILEDS



MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID EQUIVALENT
CLA-3275-5CLED	7W	757	1,211	5000K	70+	>200,000	120-277V	50/60Hz	35w HPS
CLA-3275-10CLED	12W	1,376	2,201	5000K	70+	>200,000	120-277V	50/60Hz	50w HPS
CLA-3275-15CLED	20W	1,918	3,068	5000K	70+	>200,000	120-277V	50/60Hz	75w MH
CLA-3275-20CLED	25W	2,752	4,403	5000K	70+	>200,000	120-277V	50/60Hz	100w MH

Ordering Guide Example: CLA-3275-15LED-50-MV-BLK-EMR

CLA-3275				
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
CLA-3275	5W-5CLED	27-2700K	MV=120-277V 480-480V	STANDARD:
	10W-10CLED	30-3000K		BZ-BRONZE
CLA-3275	15W-15CLED	35-3500K		ADDITIONAL CHARGE:
	20W-20CLED	40-4000K		GRY-GRAY
	50-5000K	57-5700K		BLK-BLACK
	65-6500K			WH-WHITE
				CUS-CUSTOM