


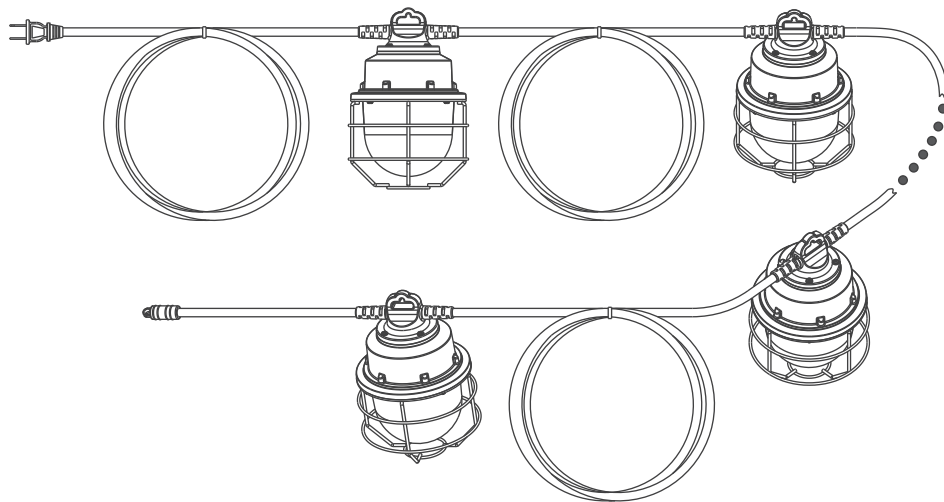


www.youlumi.com

Portable Luminaire / Light

YL-HA11 series

High Volt/Low Volt/Connectable
5*20W/10*20W




Reliable lifespan
> 50,000 hours



Flame retardant
material



Outdoor use
Waterproof design

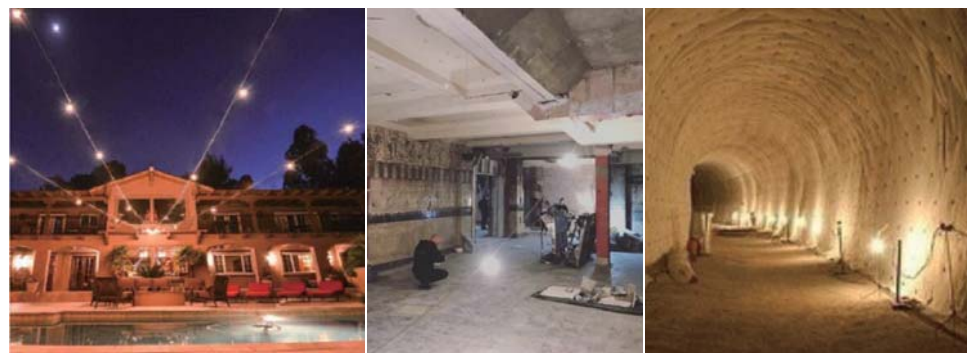

CAUTIONS


- Suitable for damp locations.
- Risk of electric shock. Do not expose the plug to water.
- Do not use with dimmers.
- Don't take apart the lamps without our permit.



SHENZHEN YOULUMI CO.,LTD




Specifications



Single lamp Parameter		
	High Volt	Low Volt
AC Input	100~277VAC 50/60Hz	24V AC/DC
Wattage	20W±10%	18W±10%
LED Qty	72 PCS SMD2835	64 PCS SMD2835
Lumen±5%	2,300 lm	2,070 lm
PF	≥0.9	—
THD	<20%	—
CRI	≥80	
CCT	2700-6500K	
Dimensions	ø120*188mm ø4.72"x7.40"	




Model No.	Input	Wattage	L1	L2	L3	L	Weight	Carton size	Per Carton
YL-HA11-5*20W-M-xxK-3P	100~277VAC 50/60Hz	100W±10%	3M 10ft	3M 10ft	0.2M 8"	15.78M 51.77ft	NW 4.90kg 10.80 lbs	700*180*H215mm 27.56"x7.09"x8.47"	1pc GW5.65kg/12.46 lbs
YL-HA11-10*20W-M-xxK-3P	100~277VAC 50/60Hz	200W±10%	3M 10ft	3M 10ft	0.2M 8"	31.30M 102.69ft	NW 9.75kg 21.50 lbs	700*310*H215mm 27.56"x12.21"x8.47"	1pc GW10.95kg/24.14 lbs

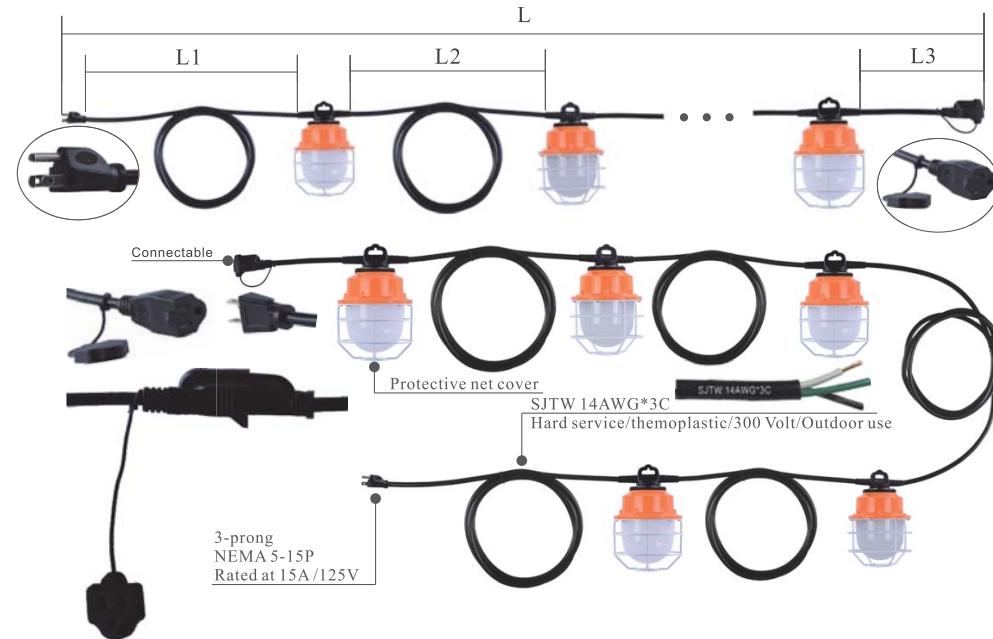


YL-HA11 series

Model No.	Input	Wattage	L1	L2	L3	L	Weight	Carton size	Per Carton
YL-HA11-5*20W-M-xxK	100~277VAC 50/60Hz	100W±10%	3M 10ft	3M 10ft	0.2M 8"	15.78M 51.77ft	NW 4.60kg 10.14 lbs	700*180*H215mm 27.56"x7.09"x8.47"	1pc GW5.35kg/11.80 lbs
YL-HA11-10*20W-M-xxK	100~277VAC 50/60Hz	200W±10%	3M 10ft	3M 10ft	0.2M 8"	31.30M 102.69ft	NW 9.15kg 20.17 lbs	700*310*H215mm 27.56"x12.21"x8.47"	1pc GW10.35kg/22.82 lbs

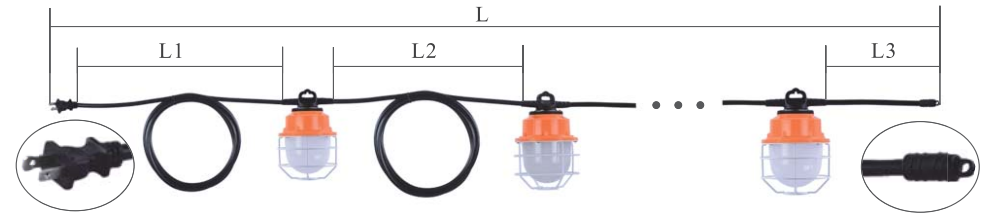

Model No.	Input	Wattage	L1	L2	L3	L	Weight	Carton size	Per Carton
YL-HA11-5*18W-X-xxK	24V AC/DC	90W±10%	3M 10ft	3M 10ft	0.2M 8"	15.78M 51.77ft	NW 4.59kg 10.12 lbs	700*180*H215mm 27.56"x7.09"x8.47"	1pc GW5.34kg/11.77 lbs

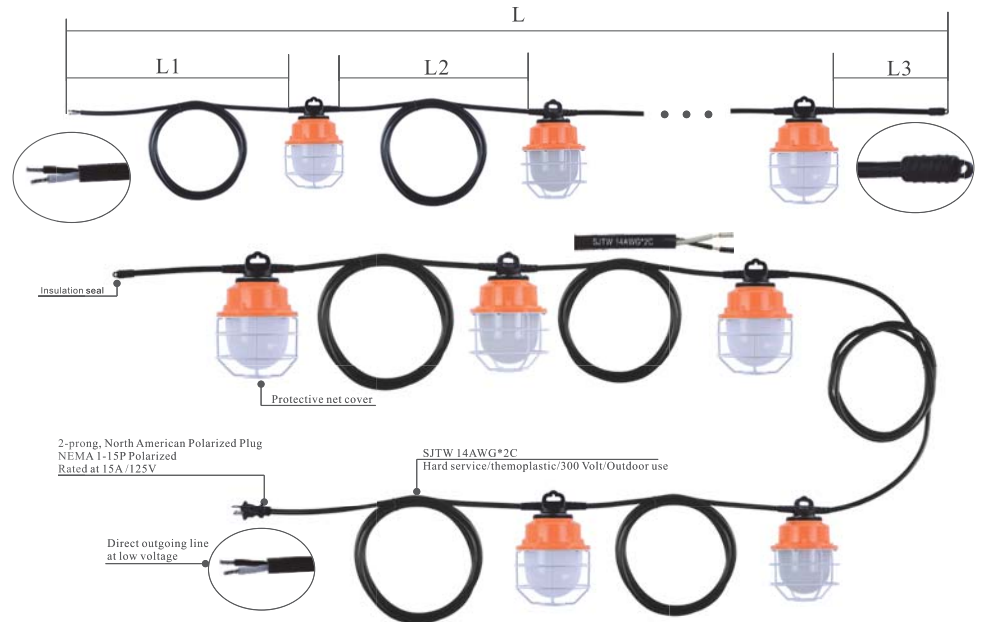

- * '5*20W' stands for 5 pcs 20W lamp; '10*20W' stands for 10 pcs 20W lamp.
- * 'M' stands for Input 100~277V AC; 'X' stands for Input Low Voltage 24V.
- * 'xxK' stands for color temperature, Example: '50K' stands for 5000K (Kelvin Temperatures may vary +/- 250K).
- * '3P' stands for 3-Plug and Connectable.
- * 'L1'/'L2'/'L3' Custom length of Please inquire. Extending the power cord may increase the size of the package.
- * DLC not available for all CCT. Please inquire.