



Oval LED Emergency Wall Pack Light

Date:..... Location: .....

Product:..... Project:.....

Quantity:..... Catalog# .....



## FEATURES

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- UL-94V-0 flame rating, fire-resistant
- IP65 protection
- Power consumption: 4.8W max
- Output: Super bright COB LED 12W
- 1000lm for general mode
- 433lm for emergency mode
- 4.8V 1800mAh Nickel Cadmium Battery
- Backup time: >90minutes
- Charging time: 24 hours
- Overcharge & Over-discharge protection
- Conversion time: <0.2second
- Operating temperature: -10°C~40°C
- Dimension: 26.5x16x9.8CM

## PERFORMANCE

Model NO	Emergency Duration	Wattage	Voltage/Current Input		Lumen Efficiency	Kelvin Options
			120V	277V		
LSEW12W	90 minutes	12W	0.14A	0.05A	100LM/W	5000K

## Special functions



- 1、 When the power supply system is out of power, the lamps start the emergency system to turn on the lights, and the duration can be up to 90 minutes.
- 2、 The lamp has a light-sensing function, when the light < 3FC lamps are automatically turned on, and the light > 3FC lamps are automatically turned off

## Electric Characteristic

Model NO	Input voltage	Color Temperature	Efficiency	Power		CRI	Light Efficiency	Working temperature	Certificate
				Input power	Empower				
LSEW12W	120-277V/AC	5000K	100LM/W	12W	4W	>72	87D	-10°C+40°C	UL

### PRODUCT ORDERING GUIDE


LS 1	EW 2	12W 3
LS	- EW	12W

LS      LEDSION

EW      Emergency Wall Pack


12W      Power 12W

### DIMENSION

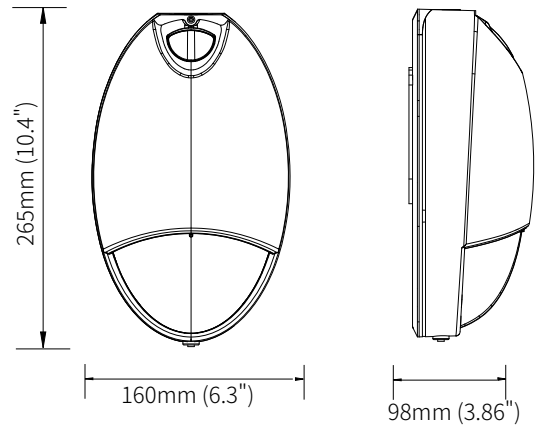

### DIMENSION


LSEW12W Input Power

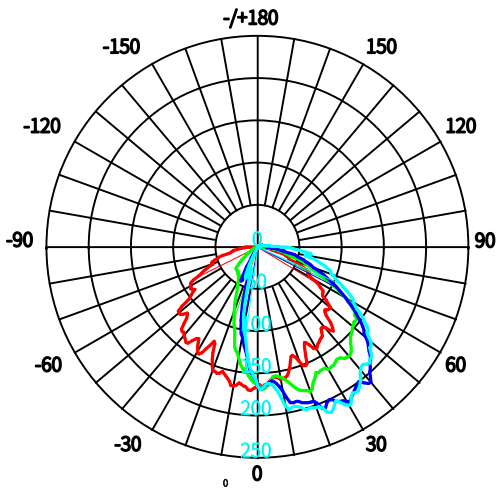

AVERAGE BEAM ANGLE(50%): 86.4°

Test Number:LSEW12W	UNIT:CD
Lumens:1200LM	- C0/180,120.1
Test Number:12W	- C30/210,120.9
Test Number:5000K	- C60/240,111.3
	- C90/270,131.4

LSEW12W Empower

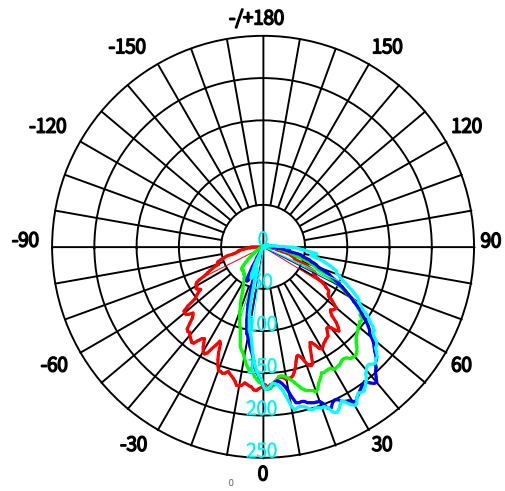

AVERAGE BEAM ANGLE(50%): 86.4°

Test Number:LSEW12W	UNIT:CD
Lumens:400LM	- C0/180,120.1
Test Number:4W	- C30/210,120.9
Test Number:5000K	- C60/240,111.3
	- C90/270,131.4