



The decorative, sophisticated design of the CL-2087 enhance the appearance of any location. It is available in 3 different sizes and multiple finishes. CL-2087 is commonly installed in ExteriorLocations such as: Hotels, Restaurants, Public Transpor-tationss facilities, and other Commertial Areas.
-10year or 10,000 Hour Limited Warranty

Features:


- 120/277 Multi-volt
- UL listed for damp and wet locations
- Kelvin: 30K, 40K or 50K
- High efficacient Lumined LED`s

Construction


- Housing is aluminum Heavy Gauge material
- Frosted Acrylic Lens (Standard)
- Multiple Finishes to choose (See Ordering Guide)



Strap Design



SD-0





SD-A

Note: For other strap options contact Factory



Example: CL-2087-S-SD0-10CLEd-30K-MV-BLK-WM-PC

| Cat # | Strap Design | Wattage | Color Temp. | Voltage | Finish | Mounting | Options |
|-----------------------------------|-------------------------|------------------------------------|----------------------------------|------------------|---|--------------------|---|
| CL-2087 S (CL-2087-S) ----- | Strap Design-0 (SD0) | 5W (5CLEd) | 3000K (30K) | 120-277V (MV) | Matte Black (MBLK) Glossy Black (GBLK) Texture Black (TBLK) Texture White (TWHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) | Wall Mount (WM) | Button Photocell (PC) Emergency Batt. Pack (EMR) Frosted Acrylic Lens (Standard) (FAL) Opal Acrylic Lens (OAL) |
| | Strap Design-A (SDA) | 10W (10CLEd) 20W (20CLEd) | 4000K (40K) 5000K (50K) | | | | |
| CL-2087 m (CL-2087-M) | | 30W (30CLEd) | | | | | |
| CL-2087 L (CL-2087-L) | | 25W (25CLEd) 40W (40CLEd) | | | | | |

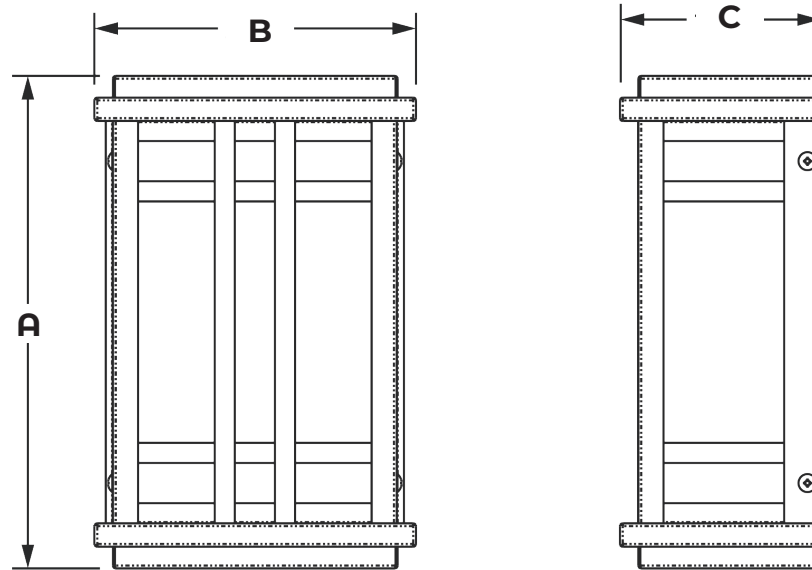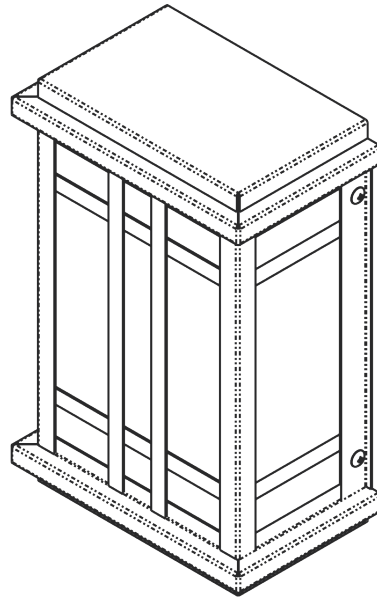

| CL-2087 Dimensions | | | |
|--------------------|-----|-----|----|
| Cat# | A | B | C |
| CL-2087-S | 10" | 6" | 4" |
| CL-2087-M | 12" | 8" | 5" |
| CL-2087-L | 15" | 10" | 5" |

| Cat # | Input Power | Lumen Output | LPW | Color Temp. (CCT) | CRI | Rated Life (L70) | Input Voltage |
|-----------------------------|-------------|--------------|-----|-------------------|-----|------------------|---------------|
| CL-2087-S-5CLED | 10W | 918 | 183 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087-S-10CLED | 15W | 1,914 | 191 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087-S-15CLED | 20W | 2754 | 183 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087- s/m -20CLED | 25W | 2,935 | 146 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087- m/L -30CLED | 35W | 4842 | 161 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087- m/L -35CLED | 40W | 5320 | 152 | 5000K | 70+ | >200,000 | 120-277V |
| CL-2087- m/L -40CLED | 45W | 6252 | 156 | 5000K | 70+ | >200,000 | 120-277V |

Proudly Manufactured and Assembled in the USA