

Our EVO line offers an all-in-one solar street light system with easy installation and operation. It includes a versatile bracket that fits any square or round pole. Ideal for area lighting, it features a high-performance Lithium iron phosphate battery, a mono solar panel, and LEDs delivering 196 lumens per watt. Advanced motion sensors enhance energy savings by adjusting brightness based on movement. With a robust design and a 5-year warranty, Our EVO line is a cost-effective and reliable choice for various solar lighting projects, balancing high quality with budget considerations.



NOMINAL FLUX **23520 LUMENS**
NOMINAL POWER **120 WATTS**

LIGHTING

Efficiency 196 Lumens/Watts
 Chips LED **PHILIPS** Luxeon 30-30
 LED lifetime Over 100 000 hours LM80
 Optics/CCT TII-S / 2300 to 6500K
 Recommended Installation Height From 19.6 to 26.2 feet

BATTERY

Technology Lithium Iron Phosphate LIFEPO4
 Capacity 922 Wh
 Autonomy Over 24 hours at full charge - 4 Rainy Days back up
 Charging time 5-6 hours
 Lifespan Over 5000 CYCLES @ 50% DOD over 10 years Lifetime
 Working temp 14°F to 158 °F - (optional -40°F TO 158 °F)

ENERGY

Solar panel 140 Watts /18V
 Cells type Monocrystalline Panel Grade A 25 years
 Certificate IEC 61215 - IEC 61730 I and II - IEC 60904

ELECTRONIC

Controller MPPT SMART CONTROLLER (SOLUX BRIDGE optional)
 Sensor Microwave 360° Motion Sensor
 Cabling Waterproof Connector, Plug and Play
 Protection Battery Management System (BMS)

MECHANICAL

Pole mounting 3.5 Inches - 2.9 Inches
 Material Aluminium and Stainless Steel

DIMENSIONS

Product 62.3 x 17.3 x 9.7 Inches
 Carton size 64.9 x 19.6 x 10.4 Inches
 Net Weight 43.2 Lbs
 Gross Weight 53.8 Lbs
 Qty /Ctn 20"/40" 129/333

Model Number **AVS-EVO-120W**
SKU **789771**

Beyond Solar retains the right to modify or change product specifications without prior notice, as part of our ongoing commitment to improvement.



CERTIFICATIONS > **IEC / TUV / EMC / LM-79- 08 and LM-80 test standards / IK8 / IP65 / CE / ULOR**

** Beyond Solar offers a 5 Year Limited Warranty for the EVO-Series luminaire shall be free from defects in material and workmanship for up to five (5) years from date of shipment. This limited warranty covers all components when installed and operated according to Beyond Solar instructions. Fixture suitable for ambient temperature from 14° to 122°. PV Panels - 20 year performance warranty Controller & Batteries : 5 years*

LUMINAIRE HOUSING & LEDS

23520 LUMENS - 2300 TO 6500 K

High pressure die-cast low-copper aluminum. **Protection class (IP65).** Beyond Solar uses a high quality Polyester Powder Coating from **AKZO NOBEL**. This powder coating provides an excellent salt and humidity resistance as well as ultra violet resistance for color retention for this product.

Our Luminaire is equipped with **PHILIPS LUXEON HE PLUS** High efficiency Chips offering and overall **196 Lumens per Watt efficacy..**

Our luminaire also complies with the **DARK SKY** requirement for light pollution with an **Upward lighting of 0,71%**



LED **3030**

LED QTY (PCS) **144**


LENS (PCS) **4**

CRI **> 80**

EVO OPTICS LIGHT DISTRIBUTION

LIGHT DISTRIBUTION CURVES

AVERAGE BEAM ANGLE (50%) : **91,2 DEG**

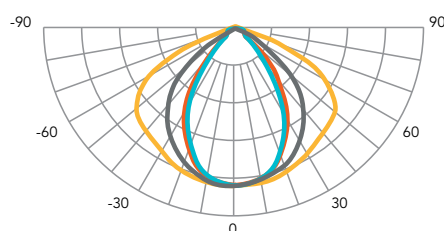

● C0/180,129.4°

● C60/240,72.7°

● C30/210,96.3°

● C90/270,66.4°

BATTERY LIFEPO4

The **EVO** line utilizes advanced **Iron Phosphate Lithium LiFePo4** battery.

This leading solar technology offers **over 5000 cycles at 50% DOD**, ensuring a robust **lifespan exceeding 10 years**. It combines reliability with efficiency, aligning with our budget-friendly yet high-quality **PERFORMANCE** range.


EXTREME TEMPERATURE

14 °F TO 158 °F (-40 °F OPTIONAL)

When Standard Lithium LiFePo4 batteries enjoy a working temperature range from 14°F TO 158 °F. Beyond Solar **offers as optional** a new Special LIFEPO4 battery with working range of **-40 °F. to 158 °F.**

EASY MAINTENANCE & ANTI THEFT SCREWS

Easy and direct access to the battery casing for maintenance. The fixation are made with anti theft screws, which request special tooling to unscrew.

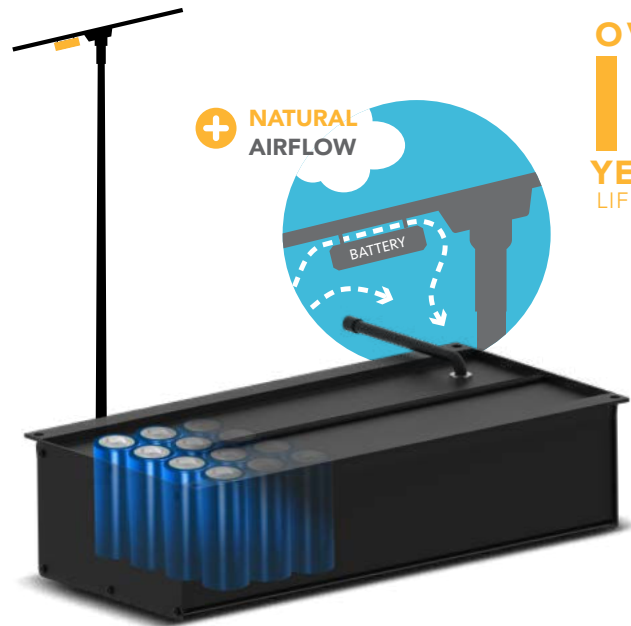

**OVER
10
YEARS
LIFETIME**

ALUMINUM WATERPROOF CASING & NATURAL AIRFLOW

High temperatures greatly negatively affect the battery's lifespan. This is why our batteries are **encapsulated in an aluminum waterproof casing** for a perfect heat dissipation.

In addition to that, the casing enjoys a natural airflow which **keeps the battery to ambient temperature.**

BMS ELECTRONIC PROTECTION BATTERY MANAGEMENT SYSTEM

Our batteries are equipped with **electronic circuit boards for a higher protection**, ensuring battery functioning optimization no matter the situation.

THE BMS PROTECTS AGAINST • OVER/UNDER CURRENT • OVERLOAD
• OVER/UNDER VOLTAGE • OVER/UNDER CHARGE • TEMPERATURE MANAGEMENT



COMPARISON OF DIFFERENT BATTERY TECHNOLOGIES

▶ LIFETIME & CYCLES AT 50% DOD*

Comparisons of different
battery technologies



Lead Acid
450



NimH
1400




Lithium ION
1000




Lithium LifePO4
5 000

▶ CHARGING TEMPERATURE RANGE WITHOUT CAPACITY LOSS


Minimum & Maximum temperature range
for Optimal charging during the day




Lead Acid



NimH



Lithium ION



Lithium
LifePO4


SOLAR PANEL

140 WATTS

High efficiency mono-crystalline **Solar panels**. Carefully selected **Grade A** Solar cells. Up to 19.4% efficiency.

Its **octagonal Anodized** aluminium alloy frame gives it a modern and elegant design as well as perfect resistance to corrosion. They are also equipped with fully **waterproof Plug and Play connectors**.

OUR PV PERFORMANCE GUARANTEE

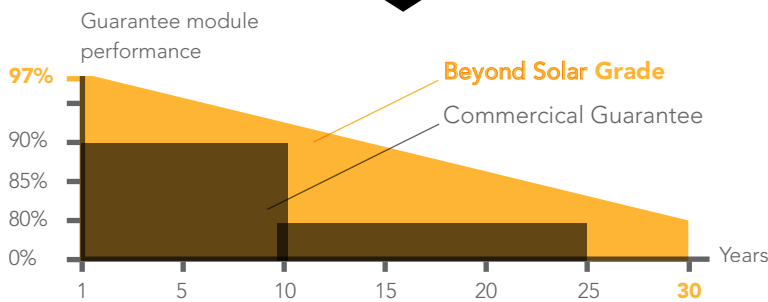

GRADE 'A'

CONTROLLER MPPT



WATERPROOF CONNECTORS "PLUG & PLAY"

All our components are assembled
seamless and easy to access

In a search for performance and reliability, our products are equipped with MPPT technology controller offering the best charging efficiency on the market up to 98%

FEATURES

3 Phases charging:

- Charge MPPTT
- Constant voltage
- Floating voltage

The controller also acts against:

REMOTE CONTROL MONITORING

In order to facilitate all maintenance operations and above all to diagnose any possible problem, without having to intervene mechanically on the luminaire, **Beyond Solar luminaires are equipped with a wireless diagnostic system via remote control.**

With a simple click it is possible to have real-time information such as:

- Automatic diagnosis in case of malfunction
- State of charge and battery history
- Real Time load and solar panel energy production history
- Age of the product and installation
- Temperature and its history



*Remote control not included

MOTION SENSOR MICROWAVE

Beyond Solar luminaires are equipped with microwave detectors that use the **Doppler effect** (like car radars) to detect a nearby objects and measure the distance. The sensor emits a high frequency wave to reflect off of and analyze the objects in the vicinity.

Since the microwaves **only detect specific objects**, detection reliability increases resulting in:


- Much better reliability compared to the Infrared detector
- Up to **360°** Directivity
- Insensitivity to **other environmental variations** such as light, color, temperature, etc.



360° CONVERGE

OPERATION MODE & LIGHTING SCHEDULE

In addition to automatic switching on and off , you have the possibility of choosing among **different modular operating modes** according to the needs of the project

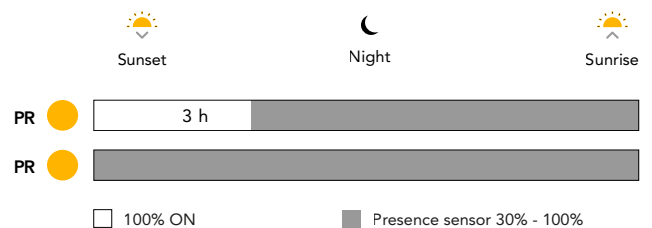

CONTACT US FOR **MORE PROGRAM OPTIONS**

EASY INSTALLATION

NO CABLING NO TRENCHING

With a well designed bracket support,
EVO is effortless and flexible to install.


INSERT, ORIENTATE & CHOOSE YOUR TILT

DIMENSIONS*

SOLAR PANEL & LED



ANTI THEFT SCREW

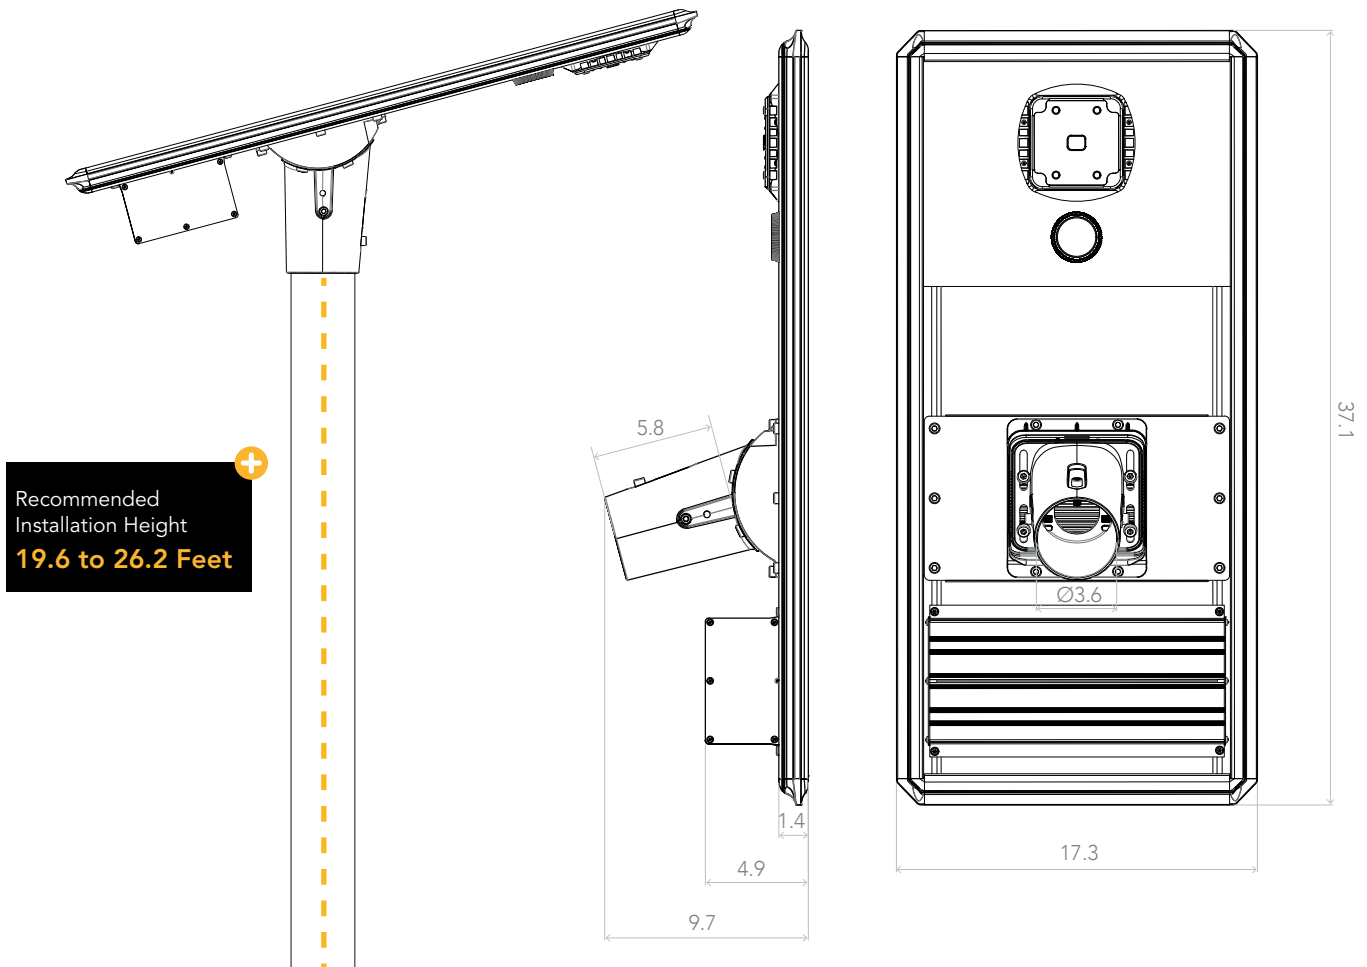

Recommended
Installation Height
19.6 to 26.2 Feet

*All dimensions are in inches

** Available in 2.9 inches Ø