


# Features

Die-cast aluminum lamp body, strong durability, anti-corrosion.

Sturdy&Durable PC lens  
160 degree beam angle

Multiple installation ways: Pole/Square Colum  
/Wall Mounting (optional)


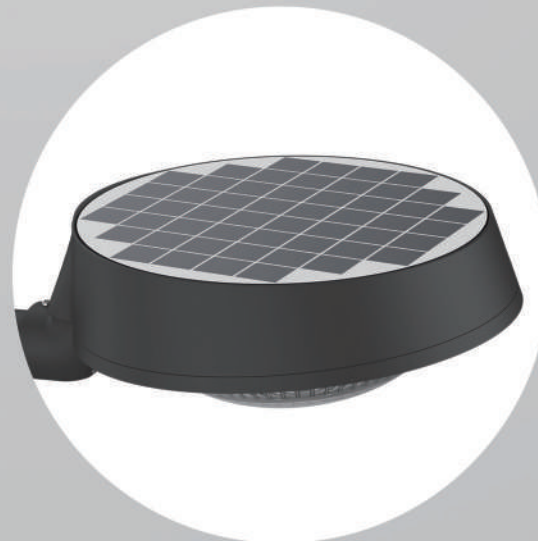


Efficient monocrystalline silicon solar panels

# Specifications

Model	GK-1B	GKS-1B
Luminous flux	1500 lm	
Solar Panel:	Monocrystalline silicon 12W	
Battery:	70.4WH LifePO4	
LED Chip:	Seoul	
Warranty:	2 Years	
CCT:	5000k-6500k	
Beam Angle:	160 degree	
Backup Time	3 nights	
Working Mode	The first 2hrs 100% brightness, later 4hrs 60% brightness, last 4hrs 30% brightness.	
Working Temperature:	-20°C to 60°C	
Charging Time:	7-9 hours	
Required Pole Size:	60 mm(top end)	
Installations:	Pole/Square/Wall Mounting	
Recommended Installation Height:	2.5 m	

# Dimension

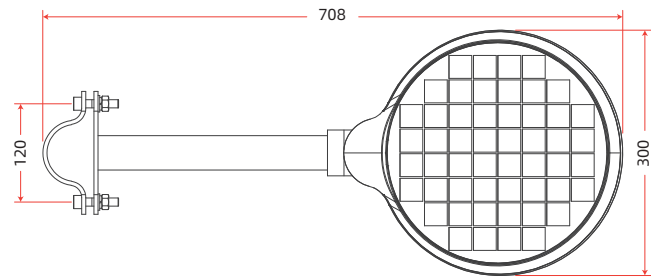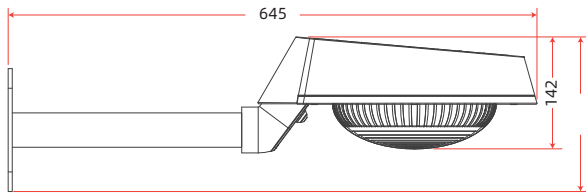

# Application places

Widely used in garden, villa, community, parks, yard, etc.

