

ALL IN ONE SOLAR STREET LIGHT

SPECIFICATION (BATMAN SERIES)






Parameters

Model No.	BMS-40-5Y				
Light Output	40W				
LiFePO4 Power Battery	231WH 4000 lm WNICHIA				
Light Efficiency					
LED Chip					
Warranty	5 Years				
ССТ	5000K-6500K				
Beam Angle	157X60 degree				
Lamp Angle	0/30 degree				
Backup Time	3 nights				
Dim Mode	First 3 hours full brightness, last 9 hours in dimmable mode(60% brightness with people, 30% brightness without people)				
Working Temperature	−10°C to 70°C				
Charging Time	9 - 11 hours				
Required Pole Size:	60 mm(top end)				
Installation Height	4 - 6m				
Recommended Mounting Distance	20 m				





Product size & Packing info

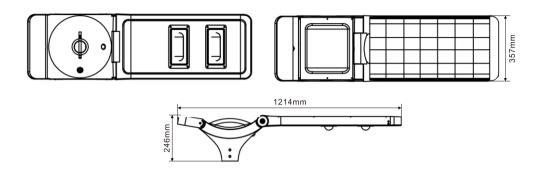

	Wattage	Packing	Carton Size	N.W.(kgs)	G.W.(kgs)	20ft container	40ft container
40W	Lamp Body	1pcs/ctn	940*480*180mm	11	13	168 sets	336 sets
	Arm & Batteries pack	1pcs/ctn	510*440*380mm	9.6	11		
				20.6	24		

Applications

Widely used in the road, street, and factory, park road, rural, mountainous area and the remote area lighting project, courtyard, schools, square and other need to place for outdoor lighting.



