

ALL IN ONE SOLAR STREET LIGHT

SPECIFICATION (AIRSHIP SERIES)





Parameters


Light Output	30W				
Solar Panel	40W 222WH				
Battery					
Light Efficiency	4200 lm				
LED Chip	SEOUL				
Warranty	3 Years				
CCT	5000K-6500K				
Beam Angle	157X60 degree				
Lamp Angle	Adjustable multiple angles				
Working Mode	Bright Mode: 18 hours Dim Mode: 36 hours				
Dim Mode	First 3 hours full brightness, last 9 hours in dimmable mode(60% brightness with people, 30% brightness without people)				
Working Temperature	−20°C to 60°C				
Charging Time	9-11 hours				
Installation Height	4-6 meters				
Required Pole Size:	60 mm(top end)				
Recommended Mounting Distance	25 m				

Features





Product size & Packing info

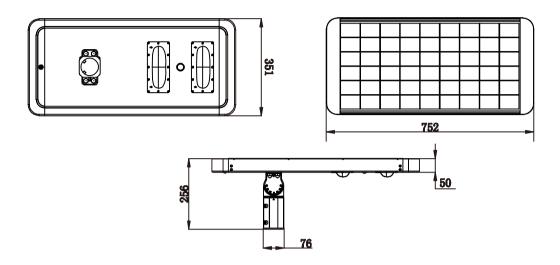

	Wattage	Packing	Carton Size	N.W.(kg)	G.W.(kg)	20#	40#
30W	Lamp Body	1pcs/ctn	900×475×175mm	11	13	360 sets	732 sets

Applications

Widely used in the road, street, and factory, park road, rural, mountainous area and the remote area lighting project, courtyard, schools, square and other need to place.





