

ALL IN ONE SOLAR STREET LIGHT

SPECIFICATION (AIRSHIP SERIES)





Parameters


Light Output	40W				
Solar Panel	60W				
Battery	388.5WH				
Light Efficiency	5600 lm				
LED Chip	SEOUL				
Warranty	3 Years				
ССТ	5000K-6500K				
Beam Angle	157X60 degree				
Lamp Angle	Adjustable multiple angles				
Working Mode	Bright Mode: 18 hours Dim Mode: 36 hours				
Dim Mode	First 3 hours full brightness, last 9 hours in dimmable mode(60% brightness with people, 30% brightness without people)				
Working Temperature	−20°C to 60°C				
Charging Time	9-11 hours				
Installation Height	4-6 meters				
Required Pole Size:	60 mm(top end)				
Recommended Mounting Distance	25 m				

Features





Product size & Packing info

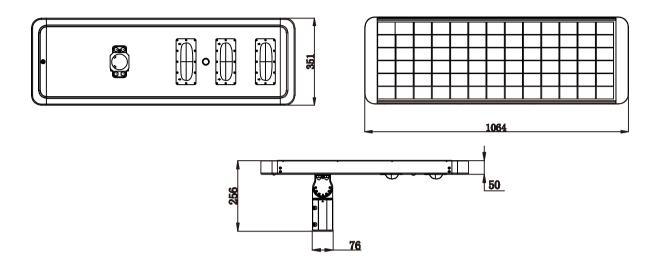

	Wattage	Packing	Carton Size	N.W.(kg)	G.W.(kg)	20#	40#	
40	W Lamp Body	1pcs/ctn	1210×475×175mm	15	17.5	240 sets	504 sets	

Applications

Widely used in the road, street, and factory, park road, rural, mountainous area and the remote area lighting project, courtyard, schools, square and other need to place.

