LEDSION Solar LED Street Light



Project	Inform	ation

Type

<u>Name</u>

Voltage

Product Description


LEDSION Solar LED Street Light Features All In One Design Function, Low Profile Design, With Motion Sensor And Smart Controller All Built In. Designed For Remote Areas 12-16Ft Lighting Poles, No Need Cable, No Electricity. Deep Cycle Battery, Charge And Discharge Over 500 Times. Can Work 3-4 Continuous Rainy Days At Intelligent Mode.





Application:

For 12-16 Ft pole, Sidewalk lighting, pathway lighting etc

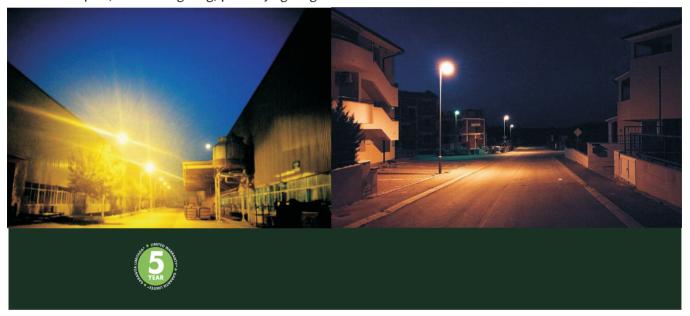

Electric Characteristic

Specification/Model	LS-SLS50W	LS-SLS70W	
LED Chips	PHILIPS 5050		
Light output	50W	70W	
Lumens output	5000LM	7000LM	
Dimension	L 29.5 / W 10 / H 4 in IP 66 2700-6500K 150*70°		
IP GRADE			
Color Temperature			
Beam Angle			
Battery	18650 lithium battery 12V 20 Ah	18650 lithium battery 12V 50 Ah	
Solar Panel	50W /18V monocrystalline silicon	70W /18V monocrystalline silicon	
Operating time	Full power >12 hours ,Intelligent mode 3-4 days		
Control Mode	Light Control + Sensor		
installation height	12-16FT		
working mode	30% bright at first 4 hrs, 100% bright when people or car passby, second 4 hrs 20% bright, and 60% bright when people passby		

Ordering Information

Example: LS-SLS40W-40K-N-T

Product	Power	Replacement	Color Temperature	Control	Furnish
LS-SLS50W	50W	150-200W MH/HPS	27K 2700K	Intelligent control system	Black
LS-SLS70W	70W	220-250W MH/HPS	5 65K 6500K		


Intelligent Control System




Intelligent controller work with Microwave sensor, ensure the effective lighting.

The intelligent control system can operate without interruption, ensure the effective lighting.







Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenace factor	1	0.91	0.8


Data references the extrapolated performance projections for the Solar Street LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM

- 80-08 and projected per IESNA TM-21-11).

Dimensions

50W: L 29.5 * W 10 * H 4 in, 16.5lbs 70W: L 37.2 * W 11.7 * H 5 in, 26.4lbs

DIA: 2.36 in

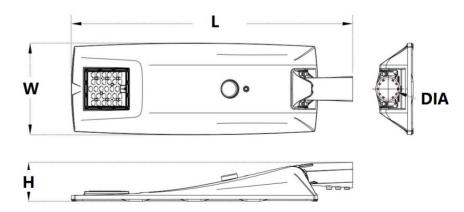

After Sale Service

The product refers to electrics knowledge. Please don't disassemble it by yourself. If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.