

# CLW-SL4

# LED Wall and Surface Fixture



The CLW-SL4 series Wall and Surface Mount, luminaire is available with Clear or Opal Lenses .

Typical Lighting Applications include Retail Centers, Industrial Parks, Schools and Universities, Public Transit and Airports, Office Buildings, Medical Facilities.



**Housing:** Heavy-Duty Die Cast Aluminum Housing and Top Frame.

**Lens:** Clear Polycarbonate or Opal Polycarbonate, Vandal Guard Optional

**Driver:** Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Standard Internal Surge Protection 10kV. 0-10V Dimming Stand



CAT #	DISTR.	WATTS	COLOR TEMP.	VOLTAGE	COLOR
SLW-SL4	SYMMETRICAL (sym)	40W (40CLED)	3000K (30K)	120-277V (mv)	BLACK (BLK)
		80W (80CLED)	4000K (40K)	480V (48)	WHITE (WH)
			5000K (50K)		BRONZE (BRZ)
					SILVER (SIL)
					GRAPHITE (GPH)
					MARINE GRADE (MG)

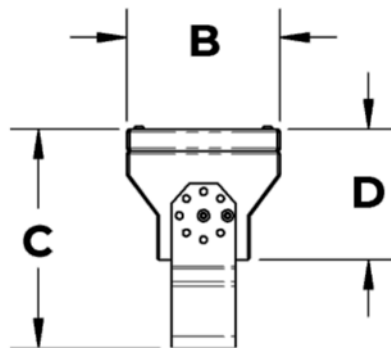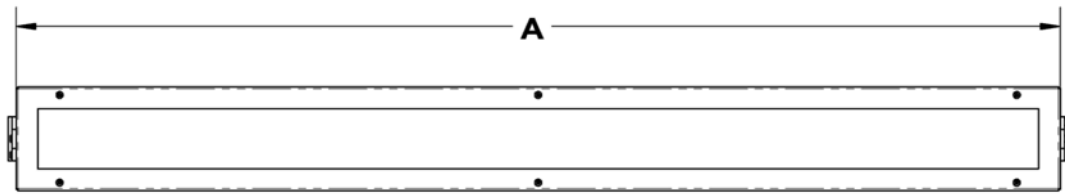

Dimensions				
CAT#	A	B	C	D
CLW-SL4	48"	4" 3/4	6" 7/8	4

MODEL #	INPUT POWER	LUMEN OUTPUT	LP/W	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
CLW-SL4	40CLED	5760	144	5000K	70+	>200,000	120-277V	50/60HZ
CLW-SL4	80CLED	11520	144	5000K	70+	>200,000	120-277V	50/60HZ